

# COAXIAL CONNECTOR

## SMB MALE For RG316D CABLE

### Features

- ✓ Frequency Range DC to 4 GHz
- ✓ SMB Interface
- ✓ High performance design




### Specifications

<b>PART NUMBER</b>	MVE3554-17.7
<b>DESCRIPTION</b>	SMB Male S/T For RG316D Connector, Crimp
<b>ELECTRICAL</b>	<b>MATERIALS</b>
FREQUENCY: DC-4GHz IMPEDANCE: 50 OHM INSULATOR RESISTANCE: 1000 MEGOHMS MIN.	BODY: BRASS, GOLD PLATED CONTACT: BRASS, GOLD PLATED TUBE: BRASS GOLD

Tolerance: X= ±0.2mm X.X= ±0.1mm .XX= ±0.05mm

### Outline Drawing (Unit: mm)

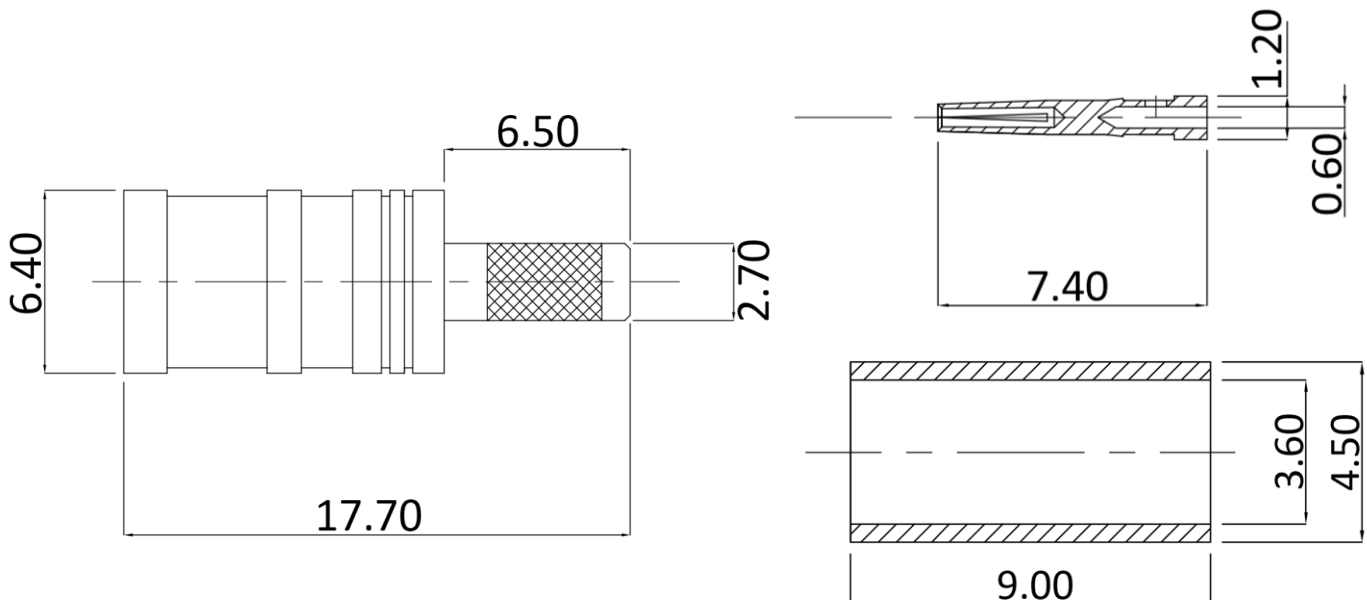

#### NOTES:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ON

