

# COAXIAL CONNECTOR

## SMA MALE For 1.37mm CABLE

### Features

- ✓ Frequency up to 6 GHz
- ✓ Low VSWR
- ✓ High performance design




### Specifications

<b>PART NUMBER</b>	MVE3555-16.6
<b>DESCRIPTION</b>	SMA Male R/A For 1.37mm Connector, Crimp
<b>ELECTRICAL</b>	<b>MATERIALS</b>
FREQUENCY: DC-6GHz IMPEDANCE: 50 OHM VSWR:1.5:1 MAX. INSULATOR RESISTANCE: 5000 MEGOHMS MIN.	BODY: BRASS, GOLD PLATED CONTACT: BRASS, GOLD PLATED TUBE: BRASS, NICKLE PLATED INSULATOR: TEFLON

TOLERANCE: X=±0.2 X.X=±0.1 X.XX=±0.05

### Outline Drawing (Unit: mm)

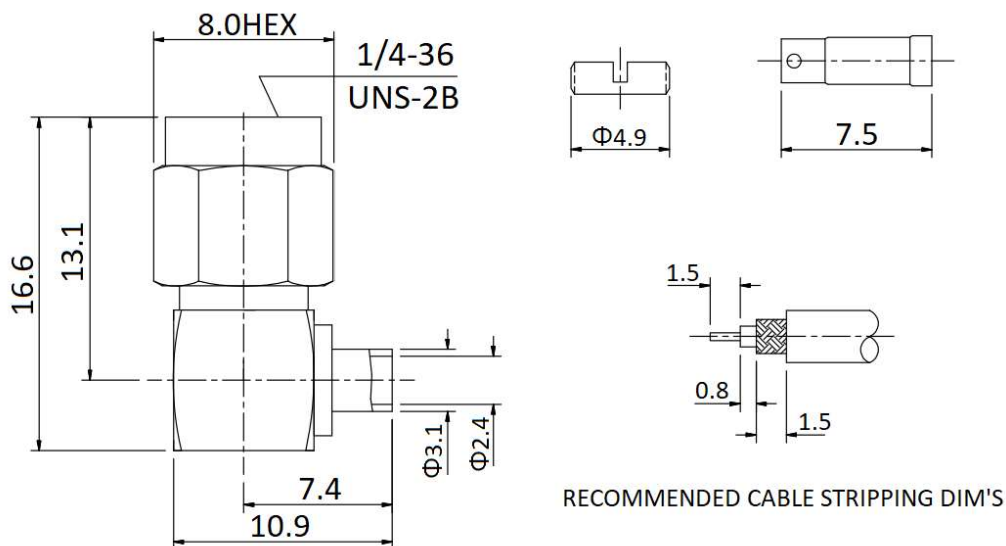

#### NOTES:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

