

COAXIAL CONNECTOR

SMA Female BH R/A For RG174/RG316 Cable

Features


- ✓ Frequency up to 6 GHz
- ✓ High Durability
- ✓ High Durability

Specifications

PART NUMBER	MVE3570-18.9
DESCRIPTION	SMA Female BH R/A For RG174/RG316 Connector, Crimp DC-6GHz
ELECTRICAL	MATERIALS
FREQUENCY: DC-6GHz IMPEDANCE: 50 OHM WORKING VOLTAGE: 250Vrms MAX. DIELECTRIC WITHSTANDING VOLTAGE: 750Vrms MAX. INSULATOR RESISTANCE: 5000 MEGOHMS MIN.	BODY: BRASS, GOLD PLATED CONTACT: BE COPPER, GOLD PLATED INSULATOR: TEFLON

TOLERANCE: X=±0.2 X.X=±0.1 X.XX=±0.05

Outline Drawing (Unit: mm)

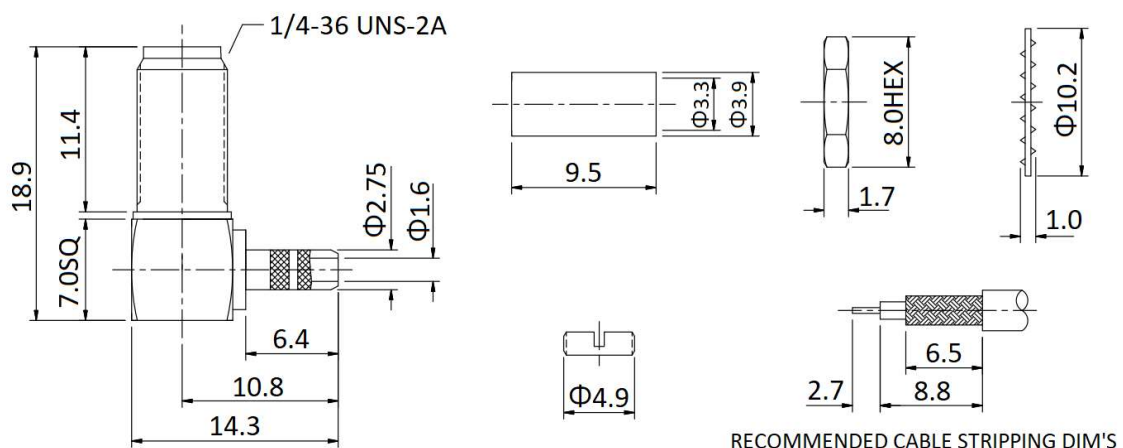

NOTES:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

