

Mount Solderless Test Connector 2.4mm END LAUNCH FOR PCB TYPE

Features

- ✓ Frequency up to 50 GHz
- ✓ High performance design
- ✓ Low Insertion Loss




Specifications

PART NUMBER	MVE3700-24F023
DESCRIPTION	2.4mm Female End Launch Mount Solderless Test Connector, DC-50GHz(Pin:0.23)
ELECTRICA	IMPEDANCE: 50 OHM FREQUENCY RANGE: DC-50 GHz VSWR: 1.25:1 TYP. INSERTION LOSS: $<0.06 \cdot \sqrt{f_{\text{GHz}}}$ dB OPERATING TEMPERATURE: -40°C to +165°C
MATERIALS	HOUSING: STAINLESS STEEL CONTACT: BeCu, GOLD PLATED BEAD: PTFE

TOLERANCE: X=±0.25 X.X=±0.15 .XX=±0.12

Outline Drawing (Unit: mm)

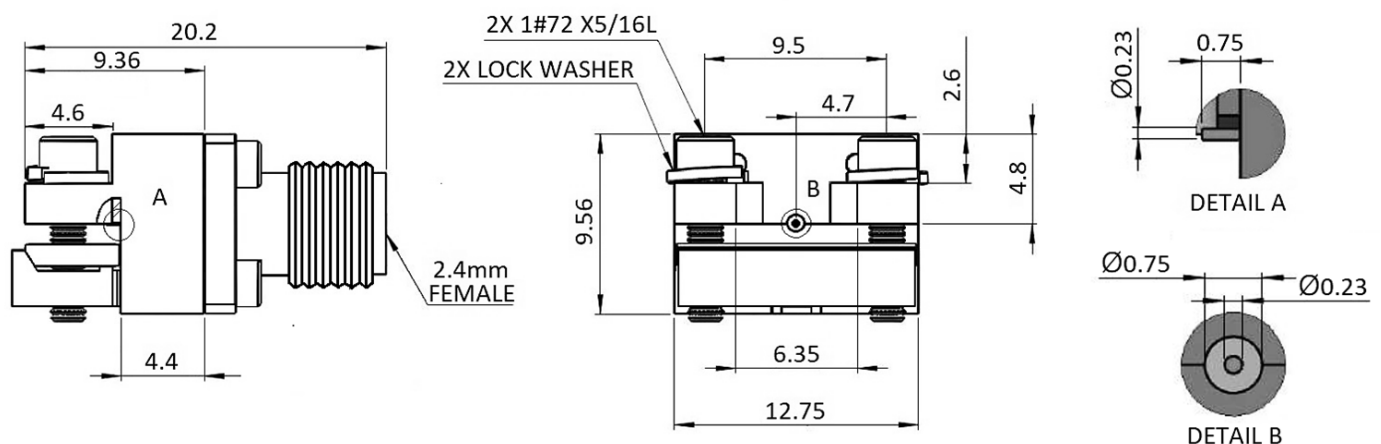

NOTES:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

