

Mount Solderless Test Connector

2.4mm END LAUNCH FOR PCB TYPE

Features

- ✓ Frequency up to 50 GHz
- ✓ High performance design
- ✓ Low Insertion Loss




Specifications

PART NUMBER	MVE3700-24F025
DESCRIPTION	2.4mm Female End Launch Mount Solderless Test Connector, DC-50GHz(Pin:0.25)
ELECTRICAL	IMPEDANCE: 50 OHM FREQUENCY RANGE: DC-50 GHz VSWR: 1.25:1 TYP. INSERTION LOSS: <0.06* $\sqrt{f_GHz}$ dB OPERATING TEMPERATURE: -40°C to +165°C
MATERIALS	HOUSING: STAINLESS STEEL CONTACT: BeCu, GOLD PLATED BEAD: PTFE

TOLERANCE: $X=\pm 0.25$ $X.X=\pm 0.15$ $.XX=\pm 0.12$

Outline Drawing (Unit: mm)

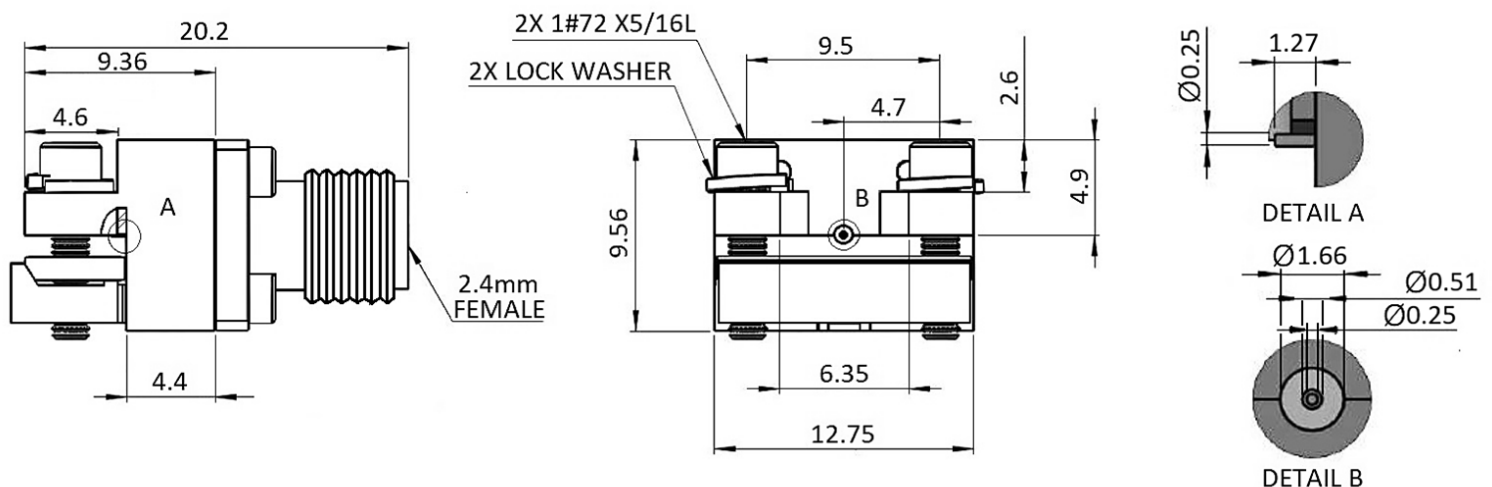

NOTES:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

