

Mount Solderless Test Connector 2.92mm END LAUNCH FOR PCB TYPE

Features

- ✓ Frequency up to 40 GHz
- ✓ High performance design
- ✓ Low Insertion Loss




Specifications

PART NUMBER	MVE3700-KF025
DESCRIPTION	2.92mm Female End Launch Mount Solderless Test Connector, DC-40GHz(Pin:0.25)
ELECTRICAL	IMPEDANCE: 50 OHM FREQUENCY RANGE: DC-40 GHz VSWR: 1.20:1 TYP. INSERTION LOSS: $<0.06 \times \sqrt{f_{\text{GHz}}}$ dB OPERATING TEMPERATURE: -40°C to +165°C
MATERIALS	HOUSING: STAINLESS STEEL CONTACT: BeCu, GOLD PLATED BEAD: PTFE

TOLERANCE: X=±0.25 X.X=±0.15 .XX=±0.12

Outline Drawing (Unit: mm)

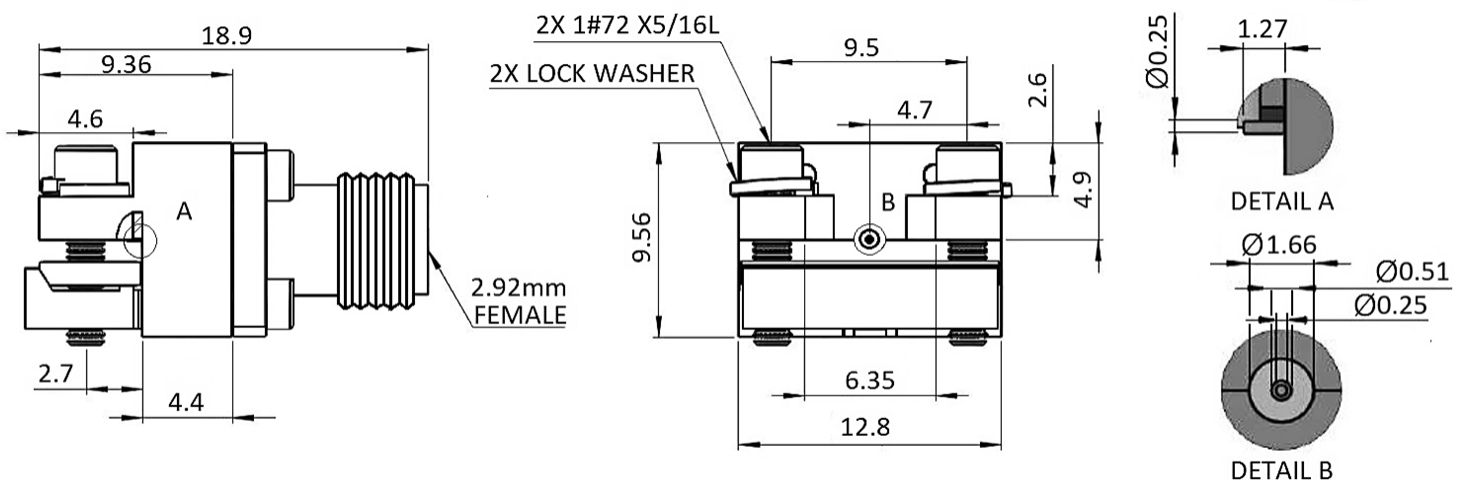

NOTES:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

