

COAXIAL CONNECTOR

SMP TYPE For Cable Assembly

Features

- ✓ Frequency up to 50GHz
- ✓ Low VSWR
- ✓ High Durability




Specifications

PART NUMBER	MVE3723-013
DESCRIPTION	2.4mm Female S/T End Launch For PCB Connector, DC-50GHz
ELECTRICAL	MATERIALS
FREQUENCY: DC-50GHz IMPEDANCE: 50 Ω DURABILITY: >500 CYCLES	BODY: STAINLESS STEEL, PASSIVATED PIN CONTACT: BERYLLIUM COPPER ALLOY, GOLD PLATED INSULATOR: PTFE & PEL

Outline Drawing (Unit: mm)

TOLERANCE: X=±0.5 X.X=±0.2 X.XX=±0.13

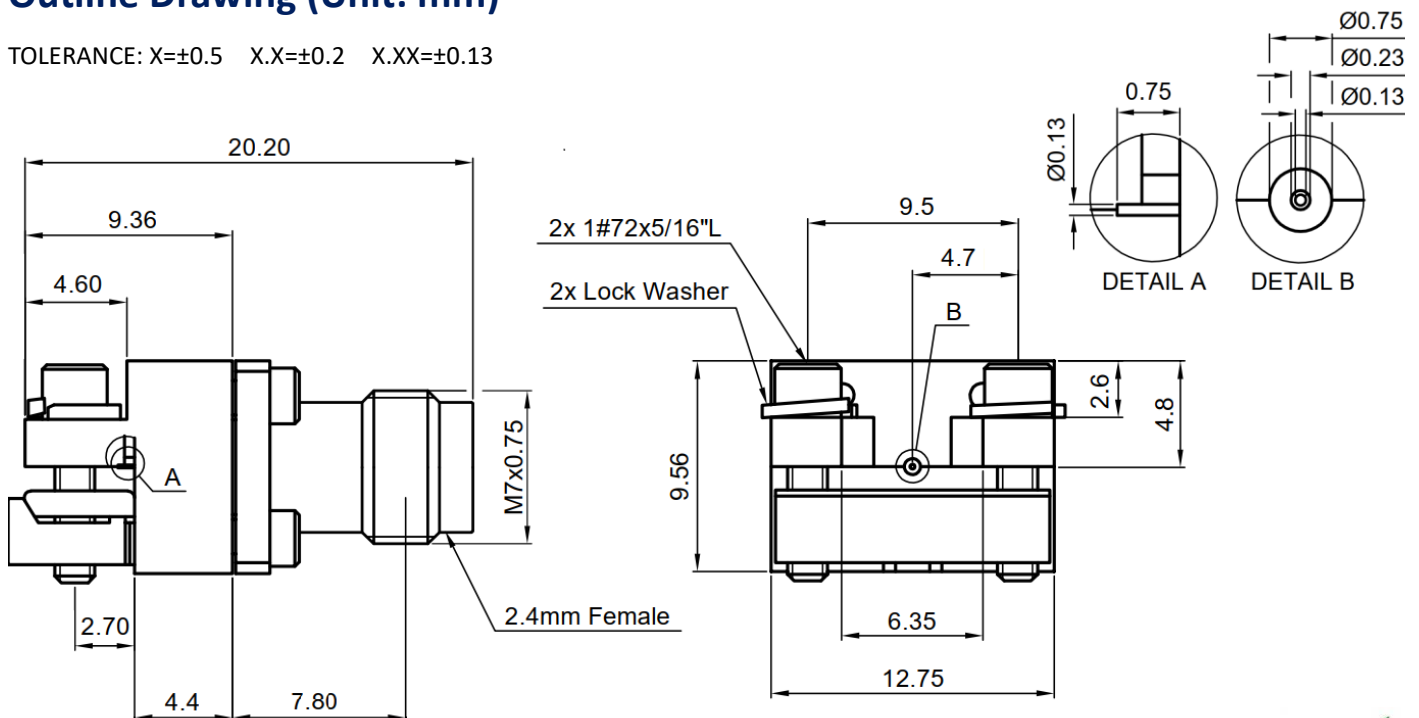

NOTES:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY



Typical Test Result

