

# COAXIAL CONNECTOR

## SMA MALE For RG316 CABLE

### Features

- ✓ Frequency Range: DC to 6 GHz
- ✓ High Durability
- ✓ Convenient assembly




### Specifications

<b>PART NUMBER</b>	MVE3825-16.8
<b>DESCRIPTION</b>	SMA Male S/T For RG174/316, Crimp Connector
<b>ELECTRICAL</b>	<b>MATERIALS</b>
FREQUENCY: DC-6GHz IMPEDANCE: 50 OHM WORKING VOLTAGE: 375Vrms MAX. DIELECTRIC WITHSTANDING VOLTAGE: 750Vrms MAX. INSULATOR RESISTANCE: 5000 MEGOHMS MIN.	BODY: BRASS, GOLD PLATED CONTACT: BRASS, GOLD PLATED 15u" INSULATOR: PTFE

Tolerance: X= ±0.2 X.X=±0.1 X.XX=±0.05

### Outline Drawing (Unit: mm)

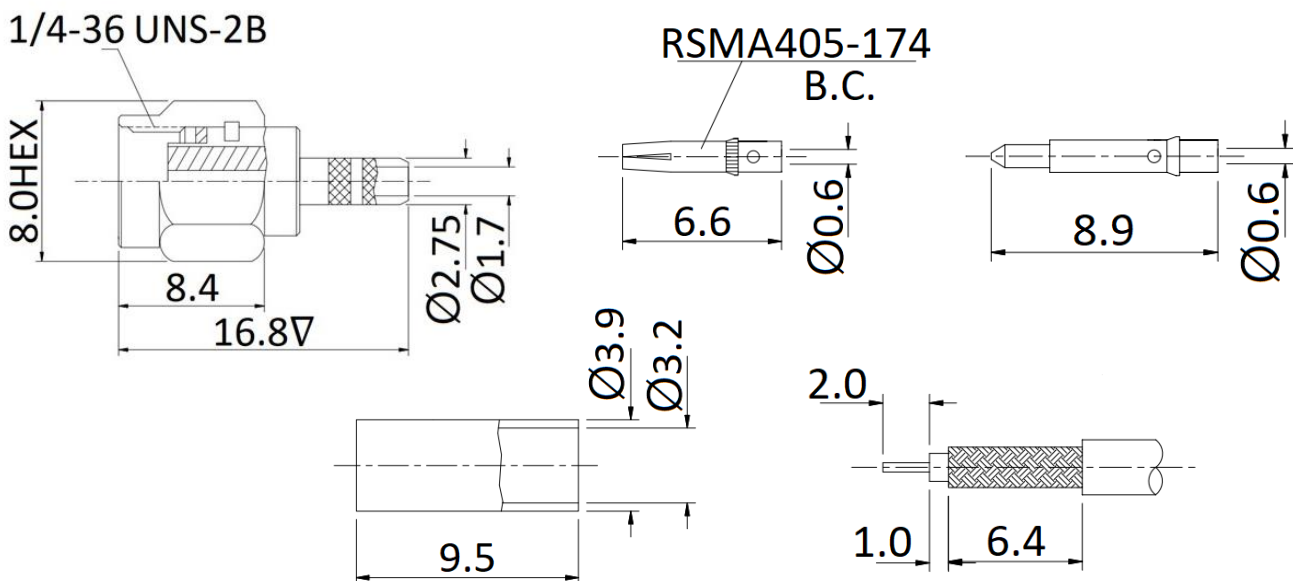

NOTES:  
1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME  
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

