

# DUAL DIRECTIONAL COUPLER

**0.5-6GHz**  
**SMA Series**

## Features

- ✓ Impedance 50ohm
- ✓ Full Frequency Bandwidth
- ✓ Dual Coupling design
- ✓ Low VSWR


## Specifications

**FREQUENCY RANGE: 0.5-6 GHz**  
**CONNECTOR TYPE: SMA FEMALE**  
**TEMPERATURE RANGE: -55°C TO +85°C**

PART NUMBER	NOMINAL COUPLING (dB)	INSERTION LOSS(dB)Max.	DIRECTIVITY (dB)Min	VSWR Max.	FORWARD POWER	CONNECTOR
MVE4921-10	10±1.2	1.8	≥12	1.35:1	≤20W	SMA

## Outline Drawing (Unit: mm)

Tolerance: ±0.5

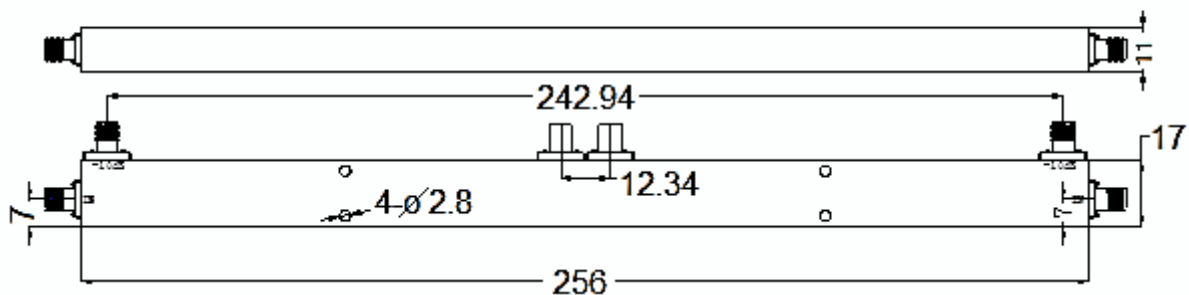

NOTES:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

