

# DUAL DIRECTIONAL COUPLER

2-18GHz  
N Series

## Features

- ✓ Dual Coupling Design
- ✓ High Directional
- ✓ Low VSWR

## Specifications


FREQUENCY RANGE: 2-18 GHz

CONNECTOR TYPE: N FEMALE

TEMPERATURE RANGE: -55°C TO +85°C

PART NUMBER	NOMINAL COUPLING	FREQUENCY SENSITIVITY	INSERTION LOSS Max.	DIRECTIVITY Min.	VSWR Max.	FORWARD POWER Max.
MVE4924-30	30dB±1.	±1.0dB	0.6 dB	≥12 dB	1.5:1	50 Watts

## Outline Drawing (Unit: mm)

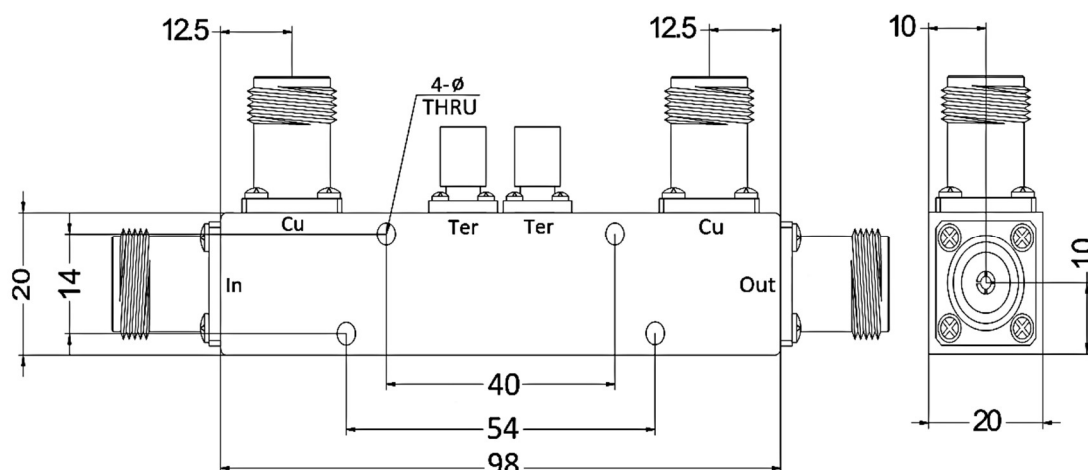


NOTES:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY



## Typical Test Result

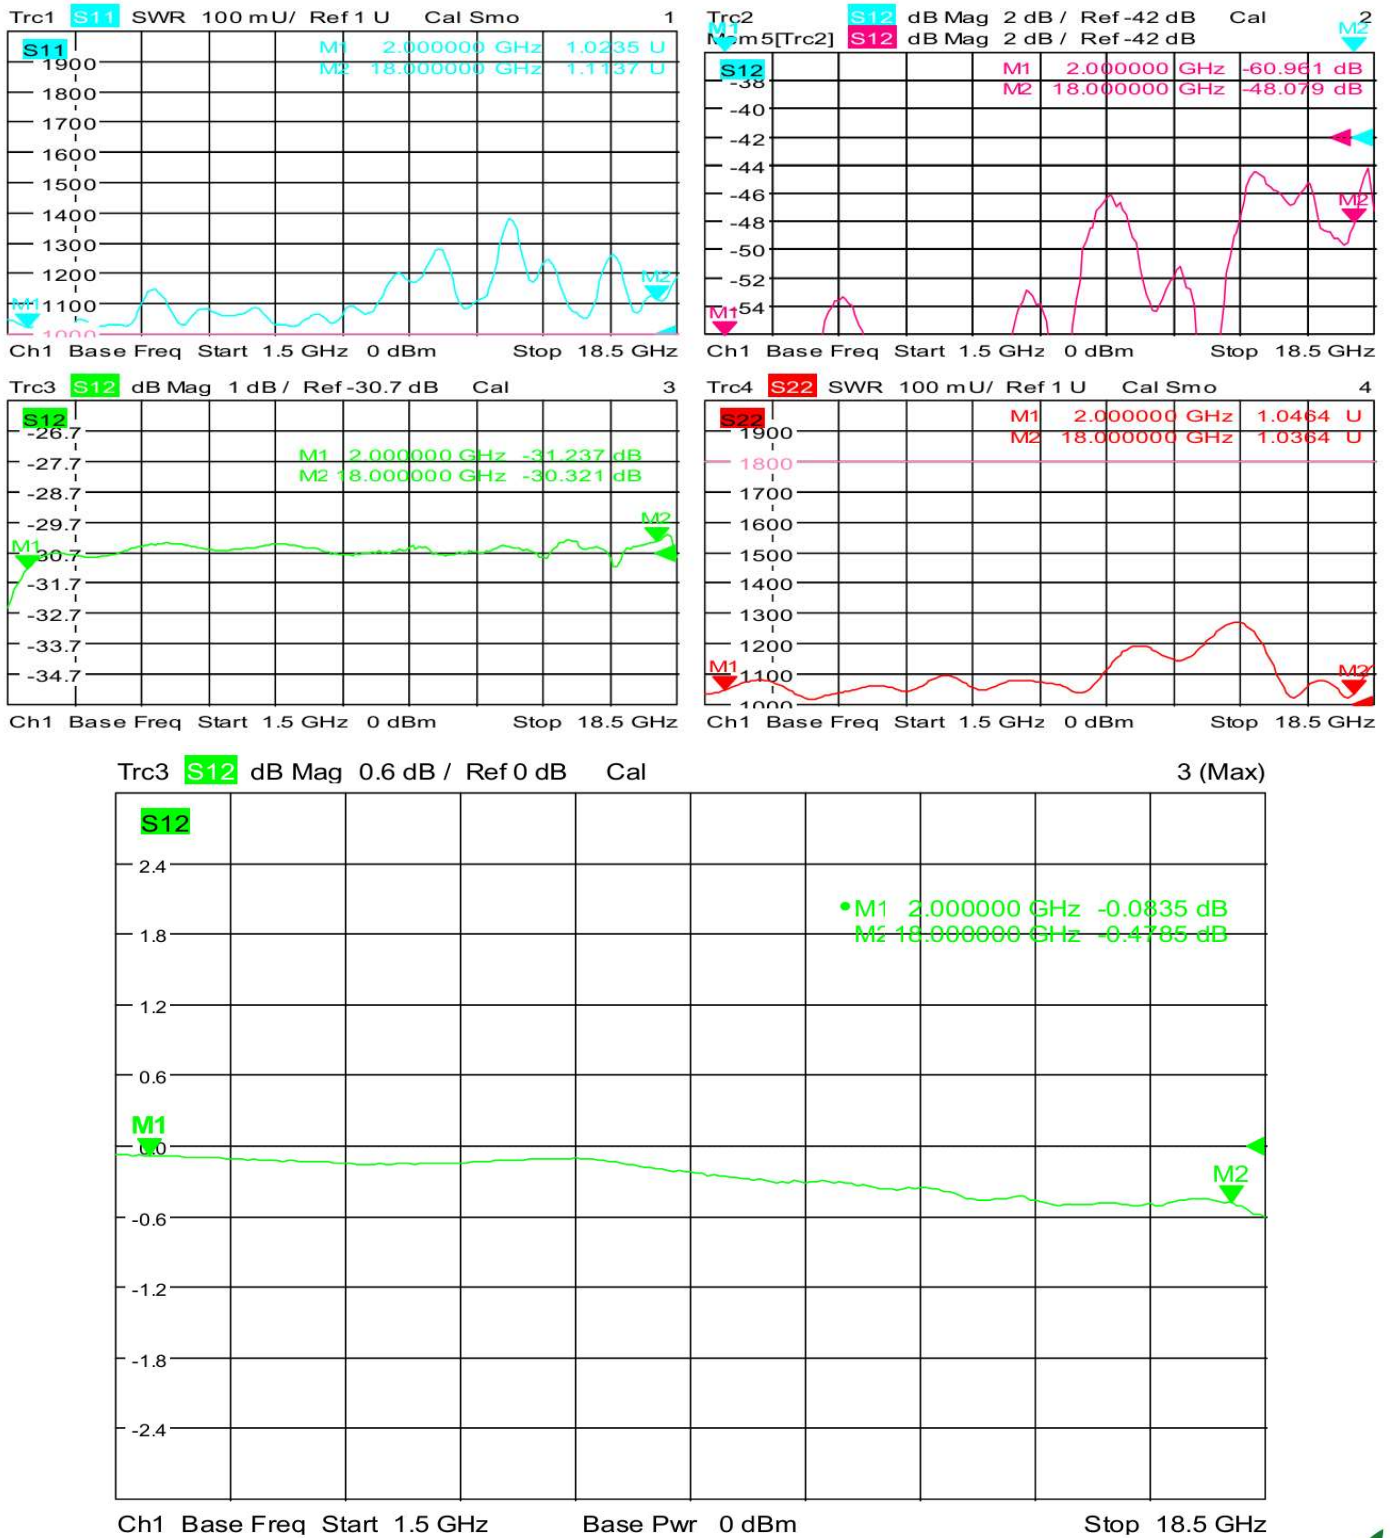

NOTES:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

