

DUAL DIRECTIONAL COUPLER

0.5-8GHz
SMA Series

Features

- ✓ Frequency Range:0.5-8GHz
- ✓ High Directional
- ✓ Low Insertion loss
- ✓ Low VSWR

Specifications


FREQUENCY RANGE: 0.5-8 GHz
CONNECTOR TYPE: SMA FEMALE
TEMPERATURE RANGE: -40°C TO +80°C

PART NUMBER	NOMINAL COUPLING (dB)	FREQUENCY SENSITIVITY (dB)	INSERTION LOSS(dB)MAX.	DIRECTIVITY (dB)Min	VSWR MAX.	Average power
MVE4926-10	10±1.2	±1.0	0.7	≥16	1.3:1	30W

*Insertion Loss does not include 0.45dB theoretical loss.

Tolerance: X= ±0.5

Outline Drawing (Unit: mm)

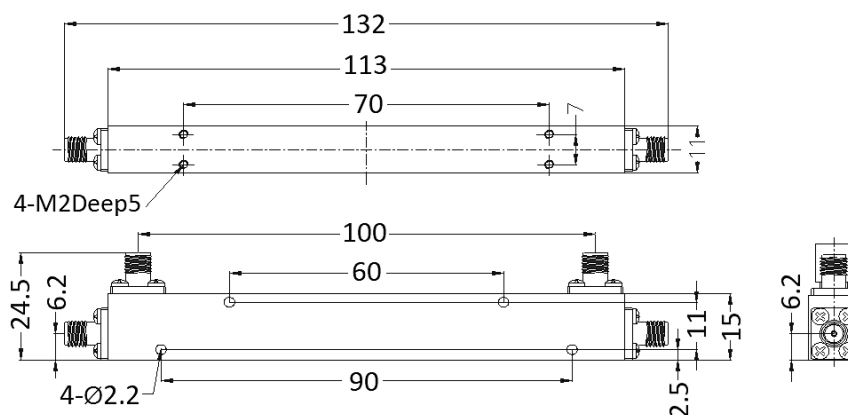

NOTES:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY