

COAXIAL ADAPTER

2.92mm-SMPM Precision Series

Features

- ✓ Frequency up to 40 GHz
- ✓ High Durability
- ✓ Low VSWR




Specifications:

PART NUMBER	MVE1160
DESCRIPTION	2.92mm Female To SMPM Female, 40GHz Adapter / Stainless
ELECTRICAL	FREQUENCY: DC-40GHz IMPEDANCE: 50Ω VSWR: 1.25:1 MAX. TEMPERATURE: -55°C~+85°C DURABILITY: 2000CYCLE MIN.
MATERIALS	BODY: 2.92MM FEMALE: STAINLESS STEEL, PASSIVATED SMPM FEMALE: BERYLLIUM BRONZE, GOLD PLATED INSULATOR: PEI PIN CONTACT: BERYLLIUM BRONZE, GOLD PLATED

TOLERANCE: X=±0.5 X.X=±0.2 .XX=±0.1

Outline Drawing (Unit: mm)

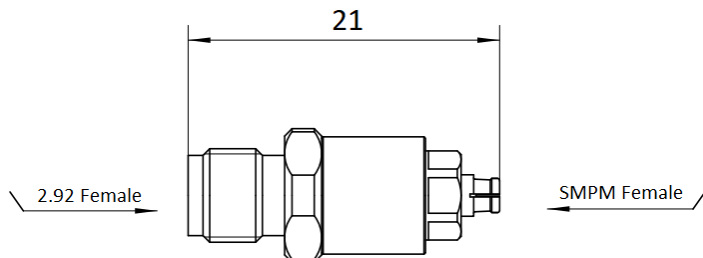

- NOTES:
1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
 2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

Typical Test Result

