

FIXED ATTENUATOR

MVE2767-XX

DC to 18GHz
N Type 500Watts

Features

- ✓ Frequency up to 18 GHz
- ✓ High Accuracy
- ✓ High Power Handling



Specifications

PART NUMBER	IMPEDANCE	FREQUENCY	STANDARD VALUE	VSWR	POWER RATING	CONNECTOR TYPE
MVE2767-XX	50 OHMS	DC-18GHz	10,20,30 40,50,60	1.5:1	500Watts @25°C	N MALE (RF IN)-FEMALE

-XX: Insert dB value desired

ATTENUATION ACCURACY

- 10dB: ±6.0 dB MAX.
- 20dB: ±5.0 dB MAX.
- 30dB: ±6.0 dB MAX.
- 40-60 dB: ±1.5 dB MAX.

MATERIAL/FINISH


HOUSING: ALUMINUM, BLACK ANODIZE
CONNECTOR: BRASS, NICKEL PLATED

ENVIRONMENTAL

TEMPERATURE RANGE: -55°C TO +125°C

Tolerance: ±0.5mm

Outline Drawing (Unit: mm)

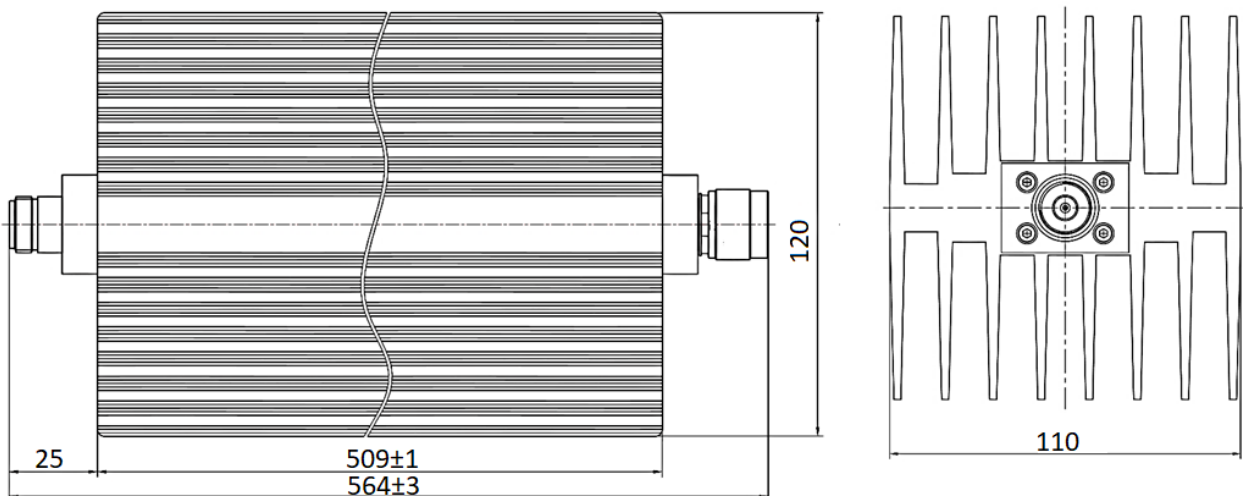

NOTES:
1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

