

COAXIAL ADAPTER

SMB To SMA Standard Series

Features

- ✓ Frequency Range: DC to 6GHz
- ✓ High Performance
- ✓ High Durability




Specifications


PART NUMBER	MVE1595
DESCRIPTION	50ohm SMA Female To SMB Male Adapter, DC-6GHz
ELECTRICAL	
FREQUENCY : DC-6GHz IMPEDANCE: 50ohm WORKING VOLTAGE: 500V DIELECTRIC WITHSTANDING VOLTAGE: 1000V INSULATION RESISTANCE: $\geq 1000M \Omega$ VSWR:1.35:1 MAX. DURABILITY:500 CYCLES	
MATERIALS	
BODY: BRASS, GOLD PLATED CONDUCTOR: TIN-PHOSPHOR BRONZE, GOLD INSULATOR: TEFLON	

Tolerance: $\pm 0.5mm$

Outline Drawing (Unit: mm)

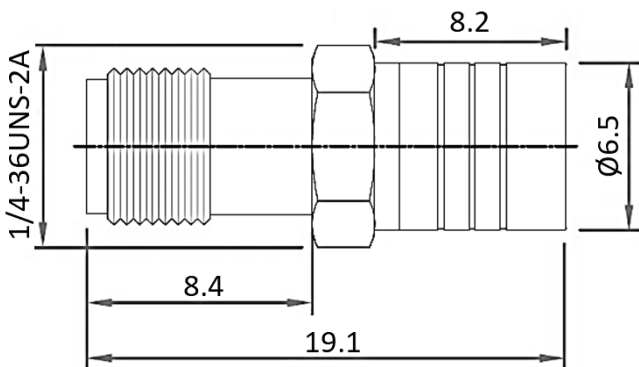

Typical Test Report:

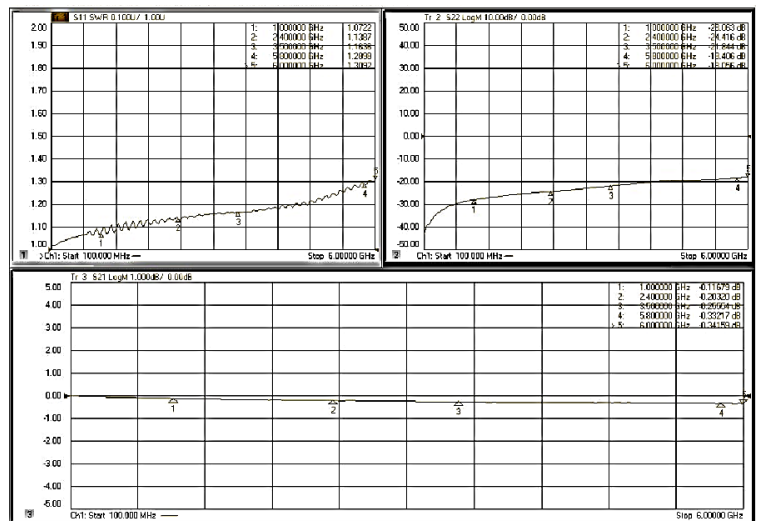

NOTES:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

