COAXIAL ADAPTER

BNC-N Standard Series

Features

√ Frequency Range: DC to 4GHz

√ High performance

✓ High Durability




Specifications

PART NUMBER	MVE1390
DESCRIPTION	BNC Female To N Male Adapter, DC-4GHz

ELECTRICAL	MATERIALS
FREQUENCY : DC-4GHz	BODY: BRASS, NICKEL PLATED
IMPEDANCE: 50Ω	PIN CONTACT: PHOSPHOR BRONZE, GOLD PLATED
WITHSTANDING VOLTAGE: 1000V	COUPLING NUT: BRASS, NICKEL PLATED
INSULATION RESISTANCE: ≥5000MΩ	INSULATOR: PTFE
DURABILITY: 500 CYCLES MIN.	GASKET: SILICONE RUBBER
TEMPERATURE RANGE: -55°C~+165°C	GASKET. STEICONE ROBBER

Tolerance: ±0.5mm

Outline Drawing (Unit: mm)

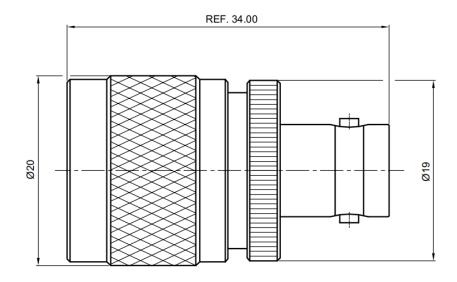



1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME 2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

