

# COAXIAL ADAPTER

## SSMA-2.92mm Precision Series

### Features

- ✓ Frequency up to 40 GHz
- ✓ Low VSWR
- ✓ High performance design




### Specifications

<b>PART NUMBER</b>	<b>MVE1814B</b>
<b>DESCRIPTION</b>	SSMA Female To 2.92mm Female, DC-40GHz Adapter
<b>ELECTRICAL</b>	FREQUENCY: DC-40GHz IMPEDANCE: 50Ω VSWR: 1.25:1 MAX.
<b>MECHANIAL</b>	TEMPERATURE RANGE: -55~+165°C DURABILITY: 500CYCLE MIN.
<b>MATERIALS</b>	BODY: STAINLESS STEEL, PASSIVATED INSULATOR: PEI PIN CONTACT: BERYLLIUM COPPER ALLOY, GOLD-PLATED

Tolerance: ±0.5mm

### Outline Drawing (Unit: mm)

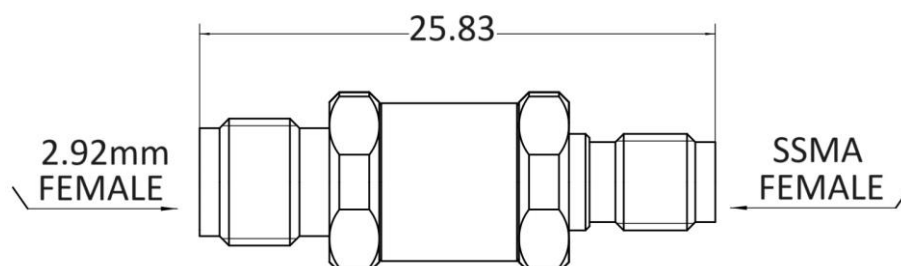

NOTES:  
1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME  
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY



## Typical Test Result

PART NUMBER	DESCRIPTION
MVE1814B	SSMA Female To 2.92mm Female, DC-40GHz Adapter

