

ELECTRICAL DATA

FREQUENCY : DC-6GHz

IMPEDANCE: 50Ω

VSWR:1.35:1 MAX.

DIELECTRIC WITHSTANDING VOLTAGE: 500 Vrms




WORKING VOLTAGE: 170 Vrms MAX.

INSULATION RESISTANCE: 1000Mega Ohms


MECHANICAL DATA

COUPLING METHOD:THREADED

DURABILITY(MATING/UNMATING):10000 Cycles

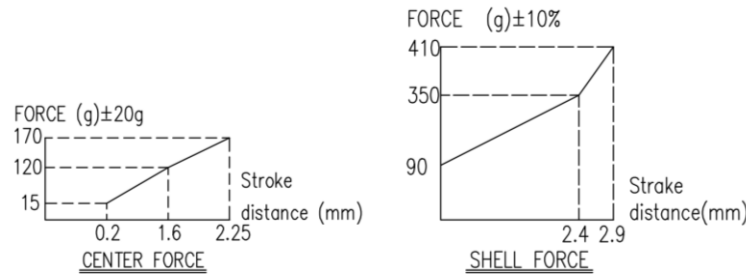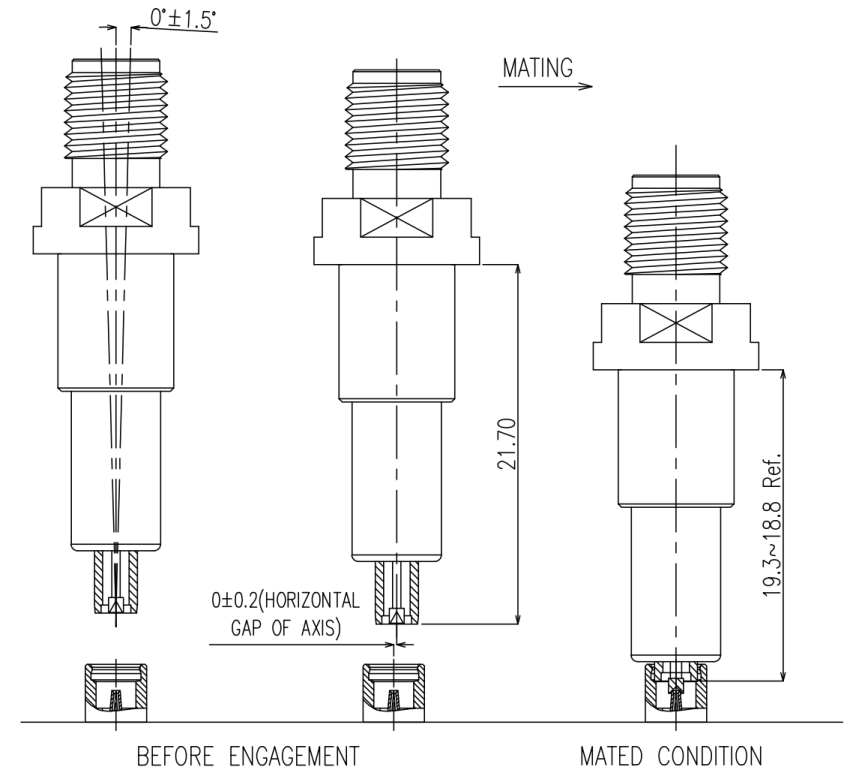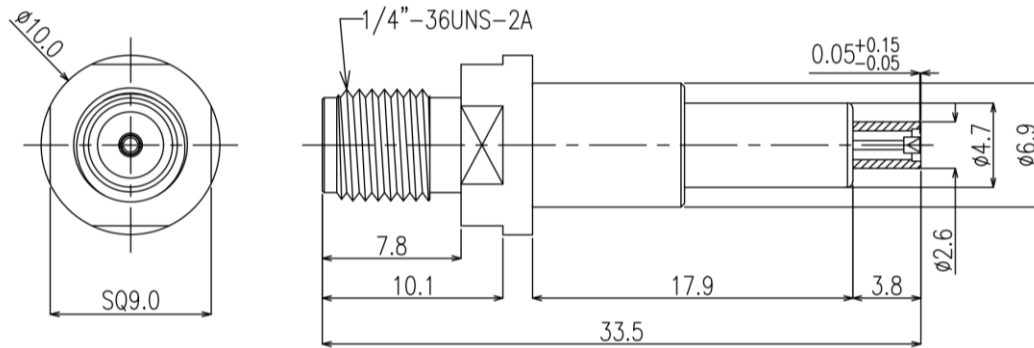

DESCRIPTION	MATERIALS	ROHS COMPLIANCE	UNIT: mm
BODY	BRASS, NICKEL/GOLD PLATED	TOLERANCE:X=±0.38 X.X=±0.25 X.XX=±0.15	
CENTER PIN	BRASS/BE-CU,GOLD PLATED	TITLE	
SPRING	SUS304	MMCX Male To SMA Female Probe, DC-6GHz	
INSULATOR	TEFLON		


芝程科技有限公司
www.micro-mve.com
 DC-67GHz RF& Microwave Components





PART NO.	MVE1983	REV	3.1
SIZE: A	SHEET: 1/1	SCALE:	

NOTES

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

Typical Test Result

PART NUMBER	DESCRIPTION
MVE1983	MMCX Male To SMA Female Probe, DC-6GHz

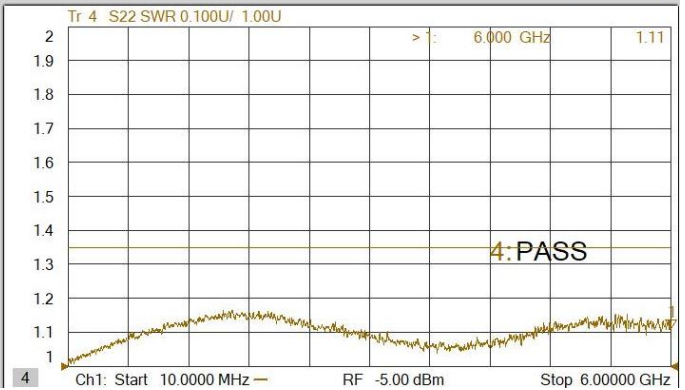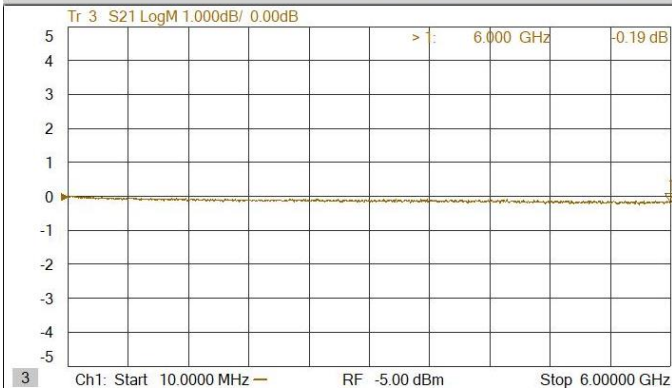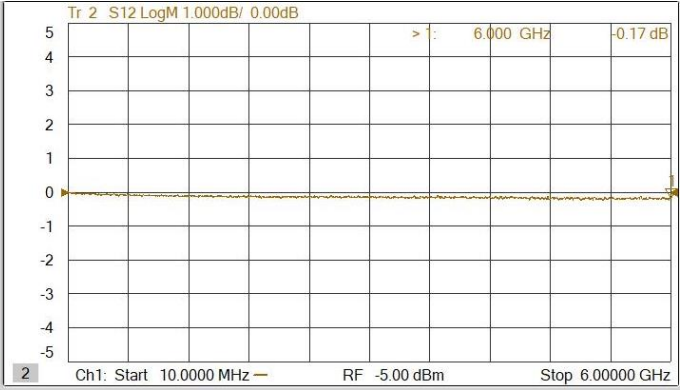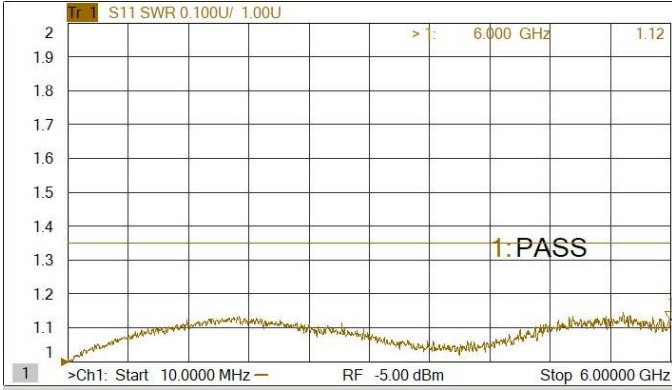

NOTES

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY