

# COAXIAL ADAPTER

## SMA-SMA Standard Series

### Features

- ✓ Frequency up to 18 GHz
- ✓ Low VSWR
- ✓ High performance design




### Specifications

<b>PART NUMBER</b>	<b>MVE1784</b>
<b>DESCRIPTION</b>	SMA Male Reverse To SMA Male Adapter, DC-18GHz
<b>ELECTRICAL</b>	<p>FREQUENCY: DC-18GHz          IMPEDANCE: 50 OHMS          WORKING VOLTAGE: 500Vrms MAX.          DIELECTRIC WITHSTANDING VOLTAGE: 1000Vrms MAX.          INSULATOR RESISTANCE: 5000 MEGOHMS MIN.          VSWR: 1.35:1 MAX</p>
<b>MATERIALS</b>	<p>BODY: BRASS, GOLD PLATED.          CONTACT: BeCu, GOLD PLATED.          INSULATOR: PTFE          SHELL: STAINLESS STEEL, PASSTIVATED          C-RING: BeCu, GOLD PLATED          GASKET: SILICON</p>

TOLERANCE: X=±0.2 X.X=±0.1 X.XX=±0.05

### Outline Drawing (Unit: mm)

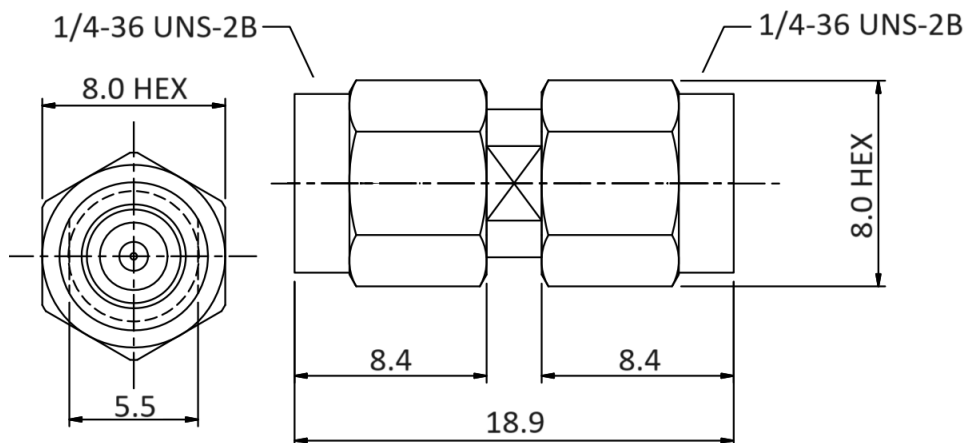

NOTES:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

