

DIRECTIONAL COUPLER

Precision Series
1-40GHz 2.92mm

Features

- ✓ Frequency up to 40 GHz
- ✓ Low VSWR
- ✓ High Directivity



SEPCIFICATIONS

FREQUENCY RANGE: 1-40GHz

CONNECTOR TYPE: 2.92mm FEMALE


AVG. POWER: 20W MAX.

TEMPERATURE RANGE: -40°C~+80°C

PART NUMBER	FREQUENCY (GHz)	COUPLING VALUE (dB)	COUPLING FLATNESS (dB)	INSERTION LOSS (dB)	DIRECTIVITY (dB)	VSWR
MVE4912-10	1.0-40.0	10.0±1.2	±1.2	2.1	10	1.70:1

Tolerance: ±0.5mm

Outline Drawing (Unit: mm)

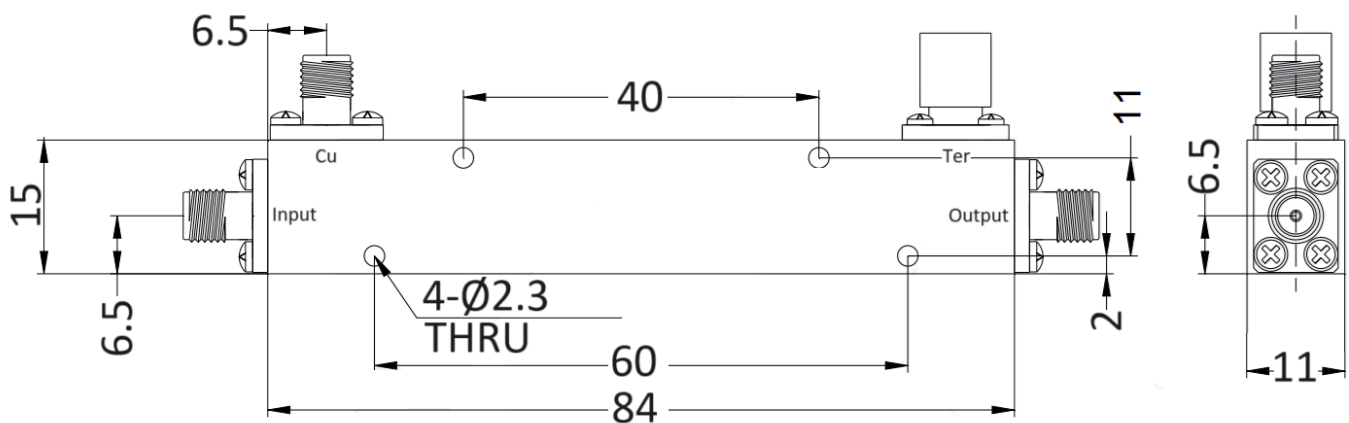

NOTES:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

