

COAXIAL ISOLATOR

2-8GHz
SMA Series

Features

- ✓ Frequency range cover from 2GHz to 8GHz
- ✓ Small size
- ✓ Low Insertion Loss



Specifications

CONNECTOR TYPE: SMA FEMALE


DIRECTION: CLOCKWISE

FINISH: NICKEL PLATED

PART NUMBER	FREQUENCY (GHz)	VSWR	INSERTION LOSS	ISOLATION	POWER		TEMPERATURE
					FORWARD	REVERSE	
MVE7562	2-8	≤1.80	≤1.6dB	≥12dB	10W	10W	-0~+60°C

Tolerance: ±0.2mm

Outline Drawing (Unit: mm)

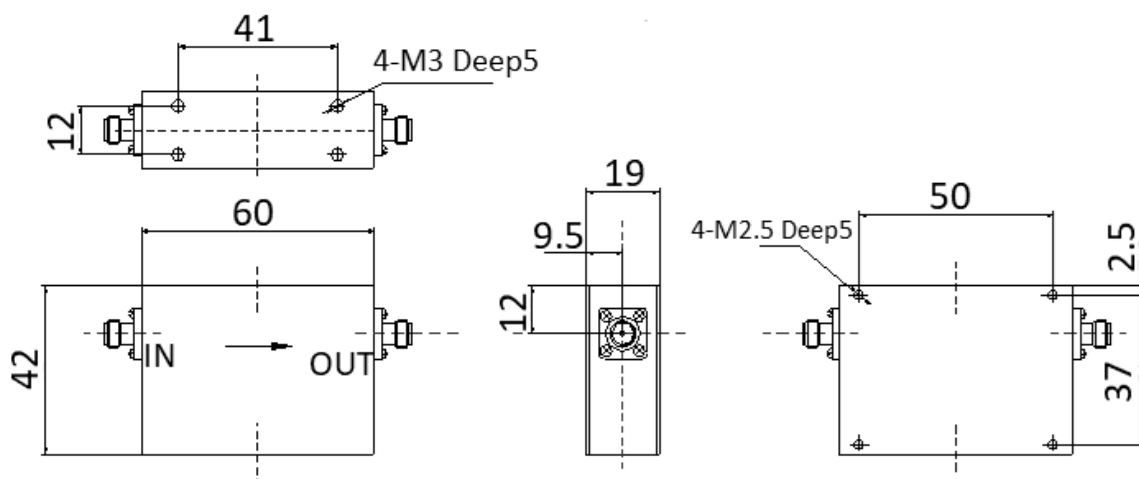

NOTES:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY



Typical Test Result

