

ELECTRICAL DATA

FREQUENCY: DC-6GHz

IMPEDANCE: 50Ω

VSWR: 1.42:1@DC-6GHz

INSULATION RESISTANCE: 1000Mega-ohms

DIELECTRIC WITHSTANDING: 750Vrms

MECHANICAL DATA

COUPLING METHOD: SNAP ON


DURABILITY (MATING/UNMATING): 100 CYCLES

ENGAGEMENT FORCE: FAKRA— 25N MAX.

MCX— 32N MAX.

DISENGAGEMENT FORCE: FAKRA— 2N MIN.

MCX— 8N~32N

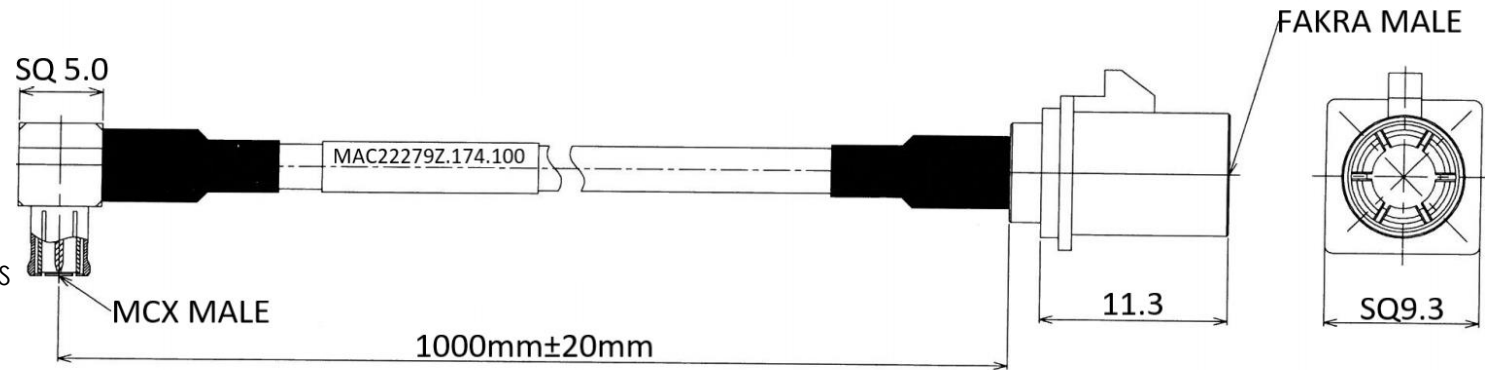

ROHS COMPLIANCE



DESCRIPTION	MATERIALS	ROHS COMPLIANCE	UNIT: mm
FAKRA	BRASS/NYLON, NICKEL PLATED	TOLERANCE: X=±0.38 X.X=±0.25 X.XX=±0.15	
MCX	BRASS, GOLD PLATED	TITLE MCX Male R/A To FAKRA Male(Z code), DC-6GHz,RG174 / L:100cm	
INSULATOR	TEFLON		

MVE 芝程科技有限公司
www.micro-mve.com

DC-67GHz RF& Microwave Components

PART NO.	MAC22279Z.174.100	REV	1.1
SIZE: A	SHEET: 1/1	SCALE:	

NOTES

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY