

FIXED ATTENUATOR

N 50Watts
DC to 18GHz

MVE2475-XX

Features

- ✓ Frequency up to 18 GHz
- ✓ High Accuracy
- ✓ Low VSWR



Specifications

PART NUMBER	IMPEDANCE	FREQUENCY	STANDARD VALUE	VSWR MAX.	AVERAGE POWER	CONNECTOR TYPE
MVE2475-XX	50 Ohm	DC – 18GHz	1-10,20,30,40,50	1.45:1	50Watts @25°C	N MALE- FEMALE

-XX: Insert dB value desired

ATTENUATION ACCURACY

- 1-10dB: ±0.8 dB MAX.
- 20dB: ±0.9 dB MAX.
- 30dB: ±1.1 dB MAX.
- 40、50dB: ±1.3 dB MAX.

MATERIAL/FINISH


CONNECTOR: BRASS NICKEL PLATED
HOUSING: ALUMINUM, BLACK ANODIZE

ENVIRONMENTAL

TEMPERATURE RANGE: -55°C TO +125°C

Tolerance: ±0.5mm

Outline Drawing (Unit: mm)

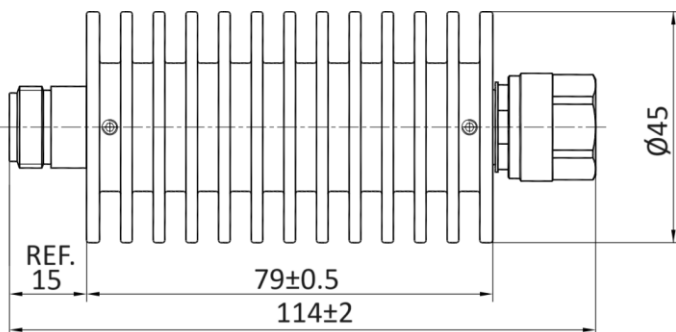

NOTES:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

Typical Test Result

