

COAXIAL ADAPTER

Mini Fakra-SMA Standard Series

Features

- ✓ Mini Fakra interface
- ✓ Frequency up to 12 GHz
- ✓ Low VSWR




Specifications

PART NUMBER	MAD-M102
DESCRIPTION	SMA Female To Mini Fakra Female, 12GHz Adapter
ELECTRICAL	MATERIALS
FREQUENCY: DC-12GHz IMPEDANCE: 50Ω VSWR: 1.5:1 MAX.@12GHz	BODY: BRASS, GOLD/NICKLE PLATED CENTER CONTACT: PH-BR, GOLD PLATED INSULATOR: TEFLON
	MECHANICAL
	COUPLING METHOD: SNAP-ON DURABILITY: 500CYCLE MIN.

Tolerance: X= ±0.38 .X= ±0.25 .XX= ±0.15

Outline Drawing (Unit: mm)

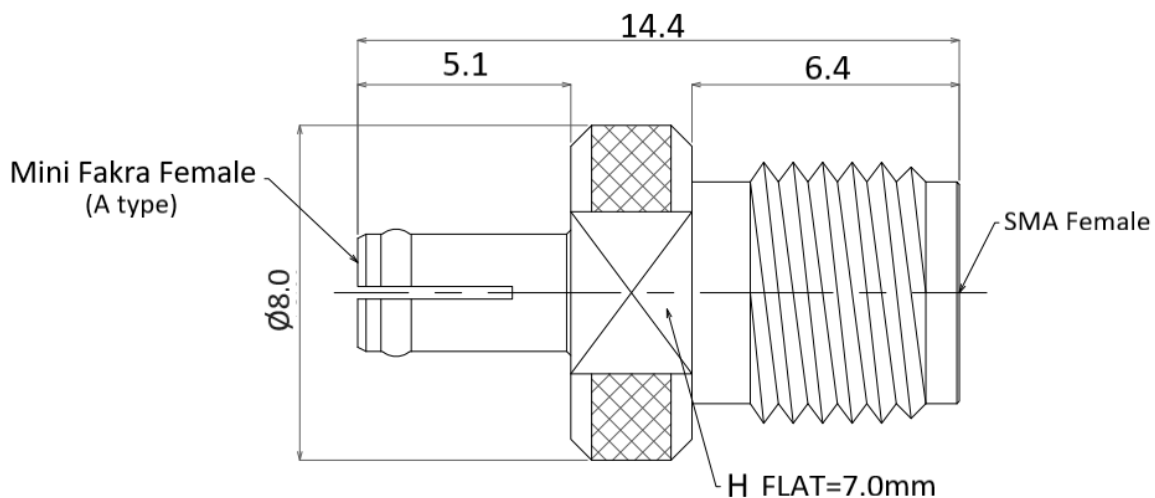


- NOTES:
1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY



Typical Test Result (MAD-M102+MAD-M101)

PART NUMBER	DESCRIPTION
MAD-M102	SMA Female To Mini Fakra Female, 12GHz Adapter

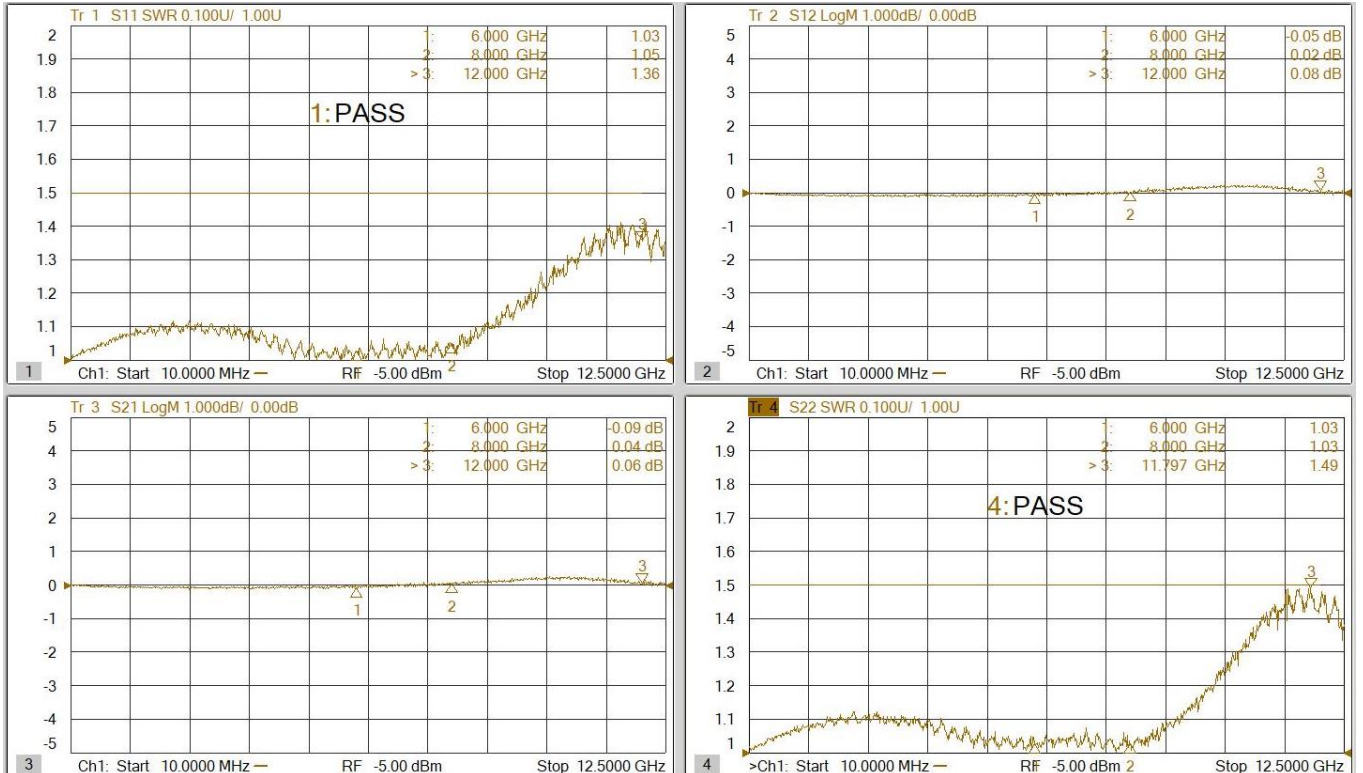

NOTES:
1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY