

COAXIAL ADAPTER

SMA-SMA Standard Series

Features

- ✓ Frequency Range: DC to 10 GHz
- ✓ Low VSWR
- ✓ SMA to SMA R/A Interface




Specifications:

PART NUMBER	MVE1770
DESCRIPTION	SMA Male Reverse To SMA Female R/A Adapter, DC-10GHz
ELECTRICAL	
FREQUENCY : DC-10GHz IMPEDANCE: 50ohm VSWR: 1.40:1 MAX. WORKING VOLTAGE: 335Vrms MAX. DIELECTRIC WITHSTANDING VOLTAGE: 1000Vrms MAX. INSULATOR RESISTANCE:5000MEGOHMS MIN.	
MATERIALS	
BODY: BRASS, GOLD PLATED CONTACT: Be. COPPER, GOLD PLATED 20u" INSULATOR: PTFE SHELL: BRASS, GOLD PLATED C-RING: Be. COPPER GASKET: SILICON	

TOLERANCE: X=±0.2 X.X=±0.1 X.XX=±0.05



Outline Drawing (Unit: mm)

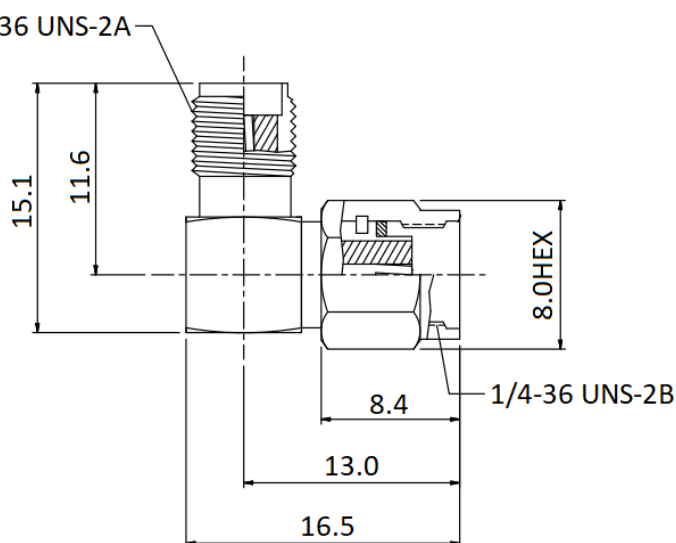

- NOTES:
1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
 2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY



Typical Test Result

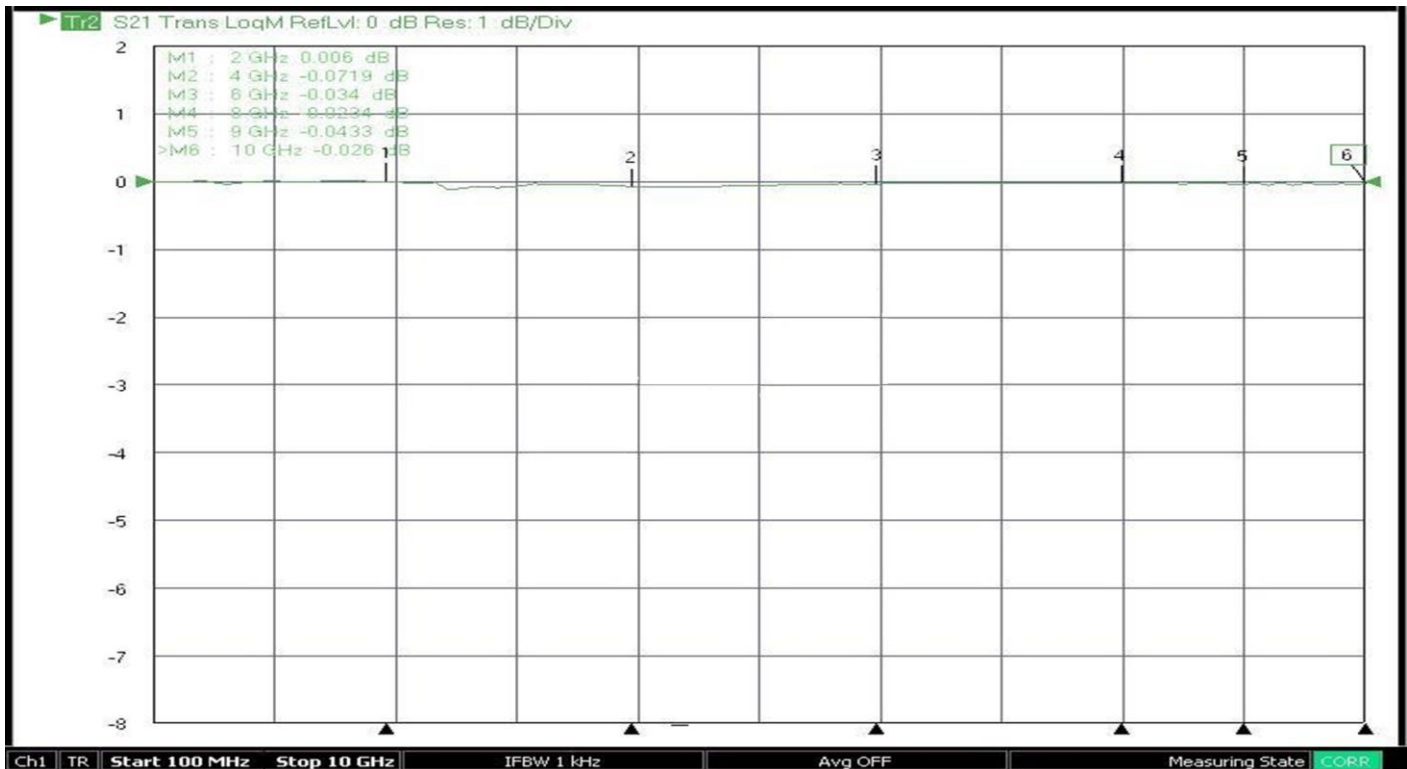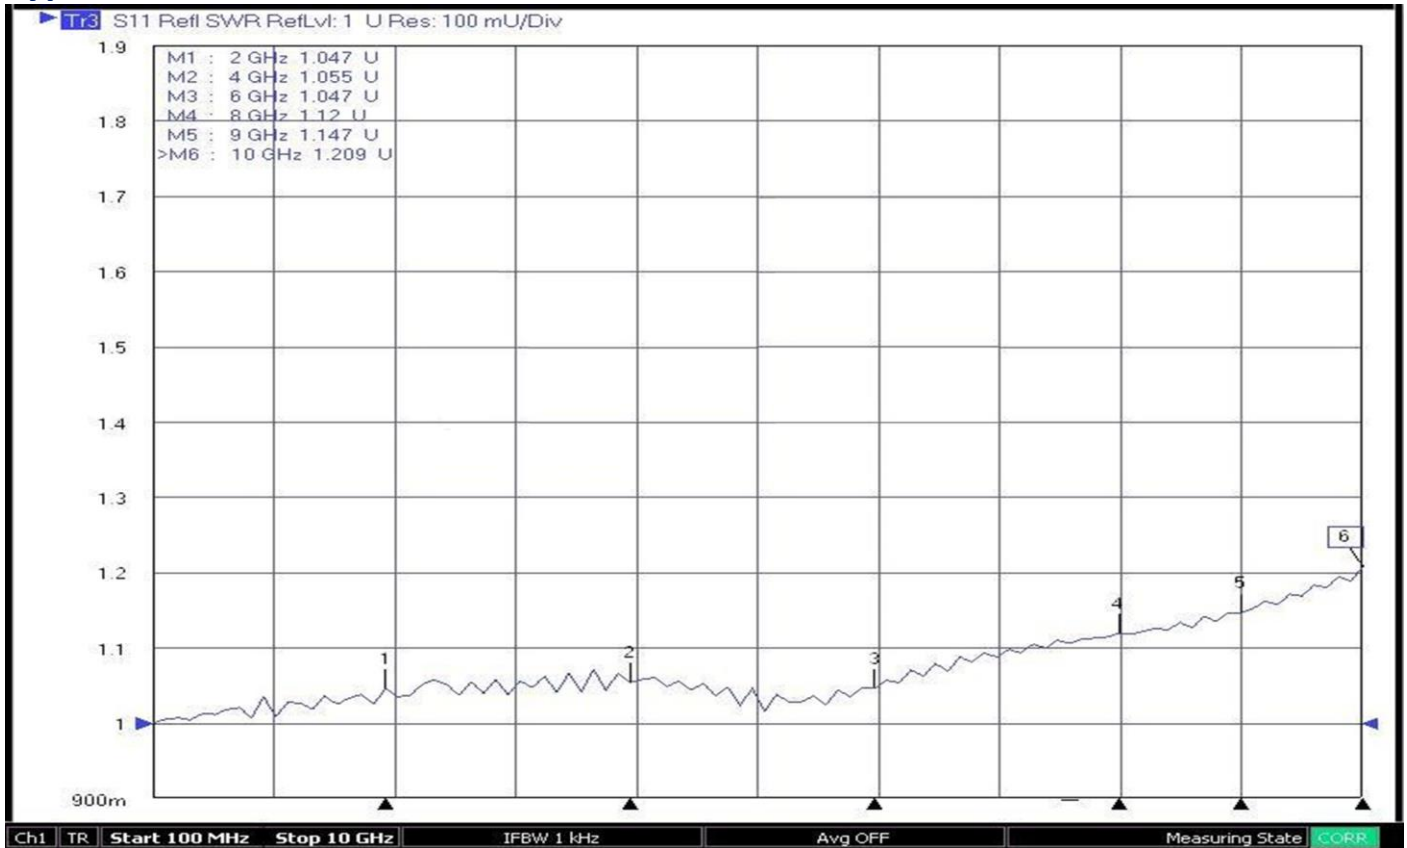

NOTES:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

