

COAXIAL ADAPTER

1.0mm-2.92mm Precision Series

Features

- ✓ Frequency up to 40GHz
- ✓ High performance design
- ✓ Low VSWR




Specifications

PART NUMBER	MVE1196
DESCRIPTION	1.0mm Female To 2.92mm Female, 40GHz Adapter/ Stainless
ELECTRICAL	<p>FREQUENCY: DC-40GHz IMPEDANCE: 50Ω INSULATION RESISTANCE: 5000MΩ DIELECTRIC WITHSTANDING VOLTAGE: 1000V VSWR: 1.25:1 MAX. INSERTION LOSS: $\leq 0.05 * \text{Sq}(f_GHz) \text{dB}$ TEMPERATURE: -45°C~+125°C</p>
MATERIALS	<p>BODY: STAINLESS STEEL DIELECTRIC: PEI INNER CONDUCTOR: BERYLLIUM COPPER</p>

Tolerance: ±0.3mm


Outline Drawing (Unit: mm)

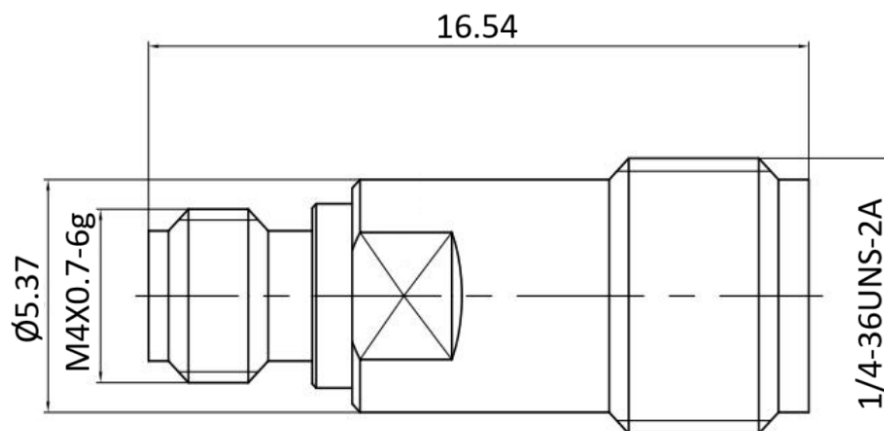

- NOTES:
1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
 2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY



Typical Test Result (MVE1195+MVE1196)

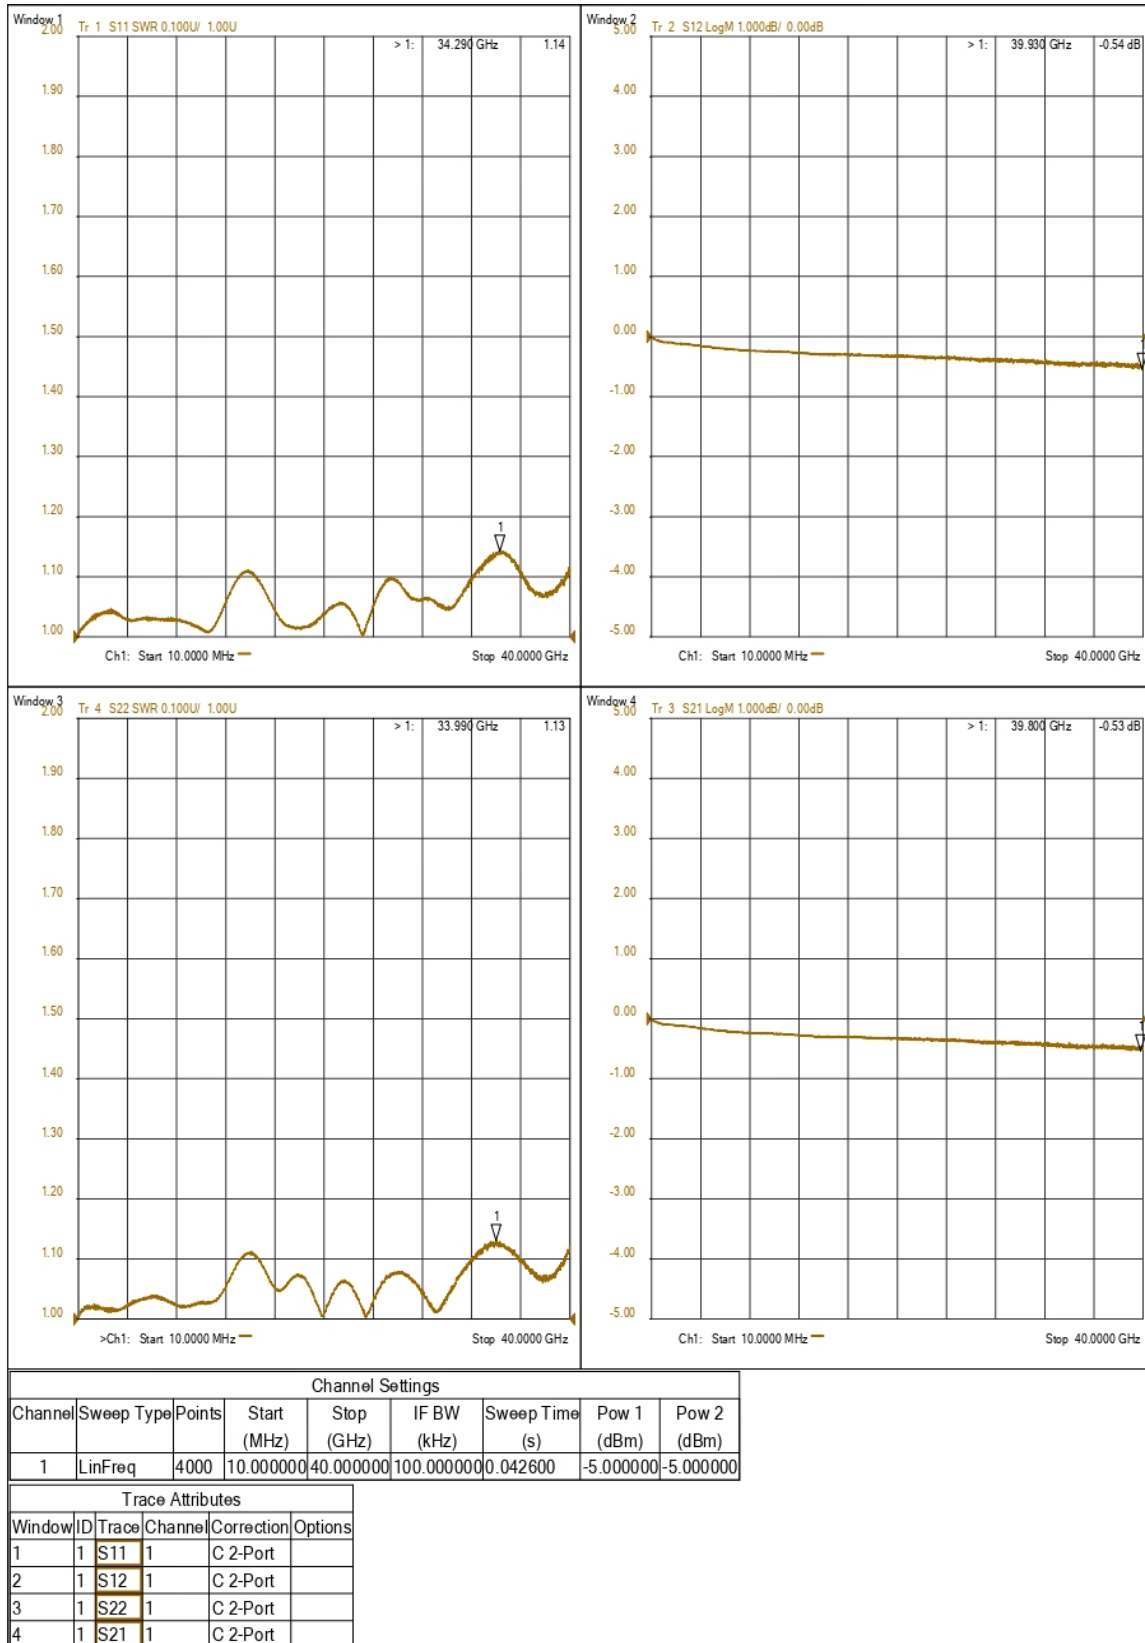

NOTES:
1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

