

ELECTRICAL DATA

FREQUENCY : DC-6GHz

IMPEDANCE: 50Ω

VSWR<1.5:1@DC-6GHz

INSULATION RESISTANCE: 1000Mega-ohms

DIELECTRIC WITHSTANDING: 500Vrms


MECHANICAL DATA

COUPLING METHOD: THREADED

TEMPERATURE RANGE: -65-165°C

DURABILITY: 8000 CYCLES

ROHS COMPLIANCE

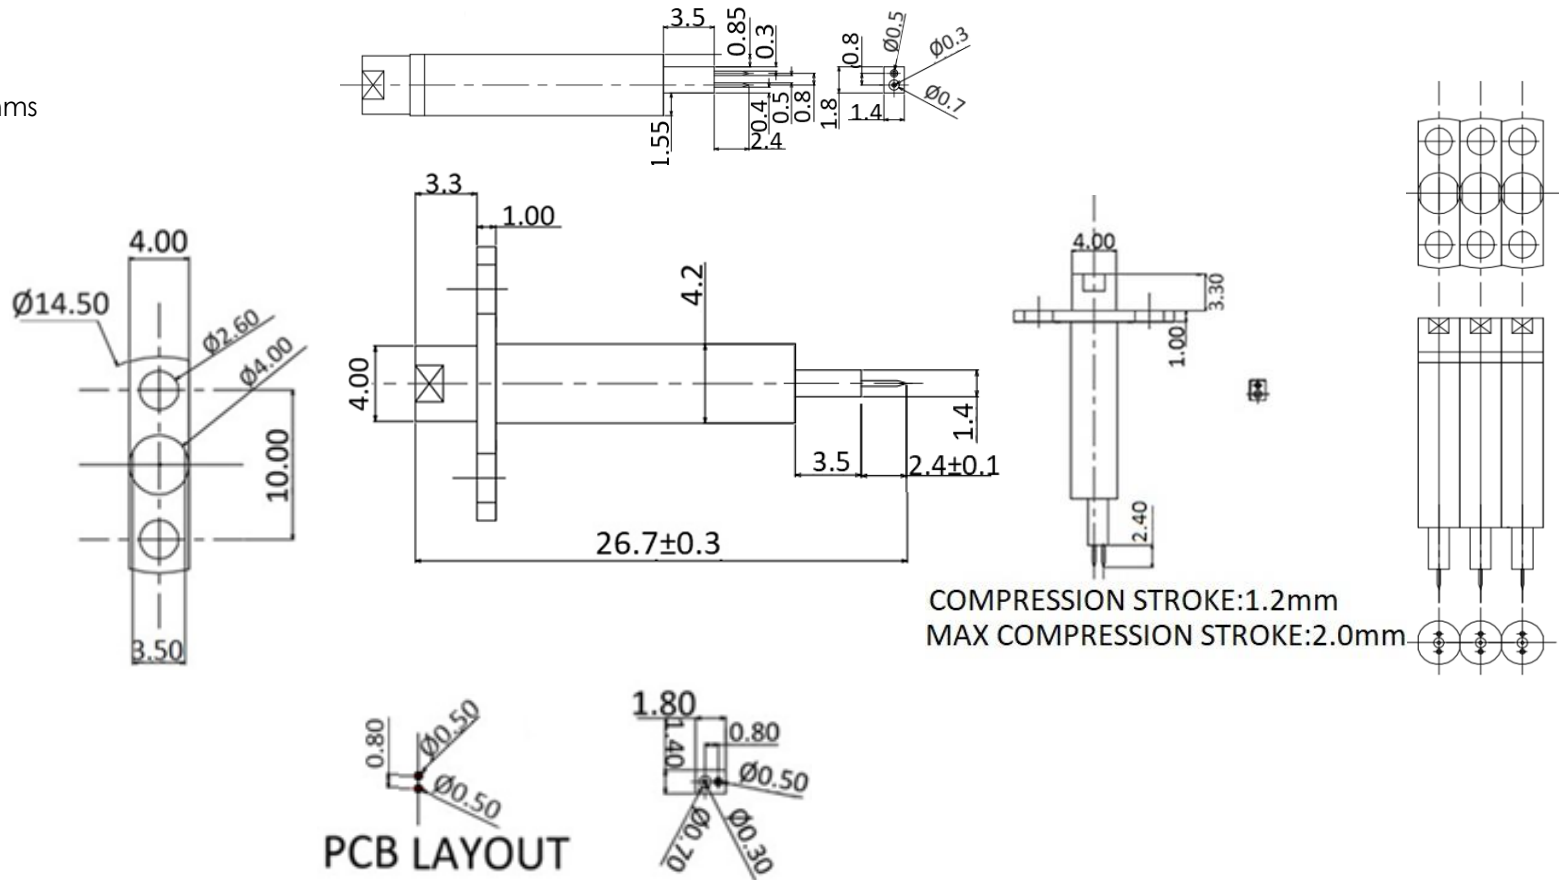

DESCRIPTION	MATERIALS	ROHS COMPLIANCE	UNIT: mm
BODY	BRASS, GOLD PLATED	TOLERANCE: X=±0.2 X.X=±0.1 X.XX=±0.05	
CONTACT PIN	BRASS, GOLD PLATED	TITLE	
INSULATOR	TEFLON	MMCX Female To RF PCB Probe(GND Pinx1/Pitch:0.8mm), DC-6GHz,Flat Type	
SPRING	SUS304		

NOTES

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

MVE Microwave 芝程科技有限公司


www.micro-mve.com

DC-67GHz RF& Microwave Components

PART NO.	MVE1982-0.8B	REV	2.2
SIZE: A	SHEET: 1/1	SCALE:	

Typical Test Result

PART NUMBER	DESCRIPTION
MVE1982-0.8B	MMCX Female To RF PCB Probe(GND Pinx1/Pitch:0.8mm), DC-6GHz,Flat Type(3.5x1.8)(Vertical type)

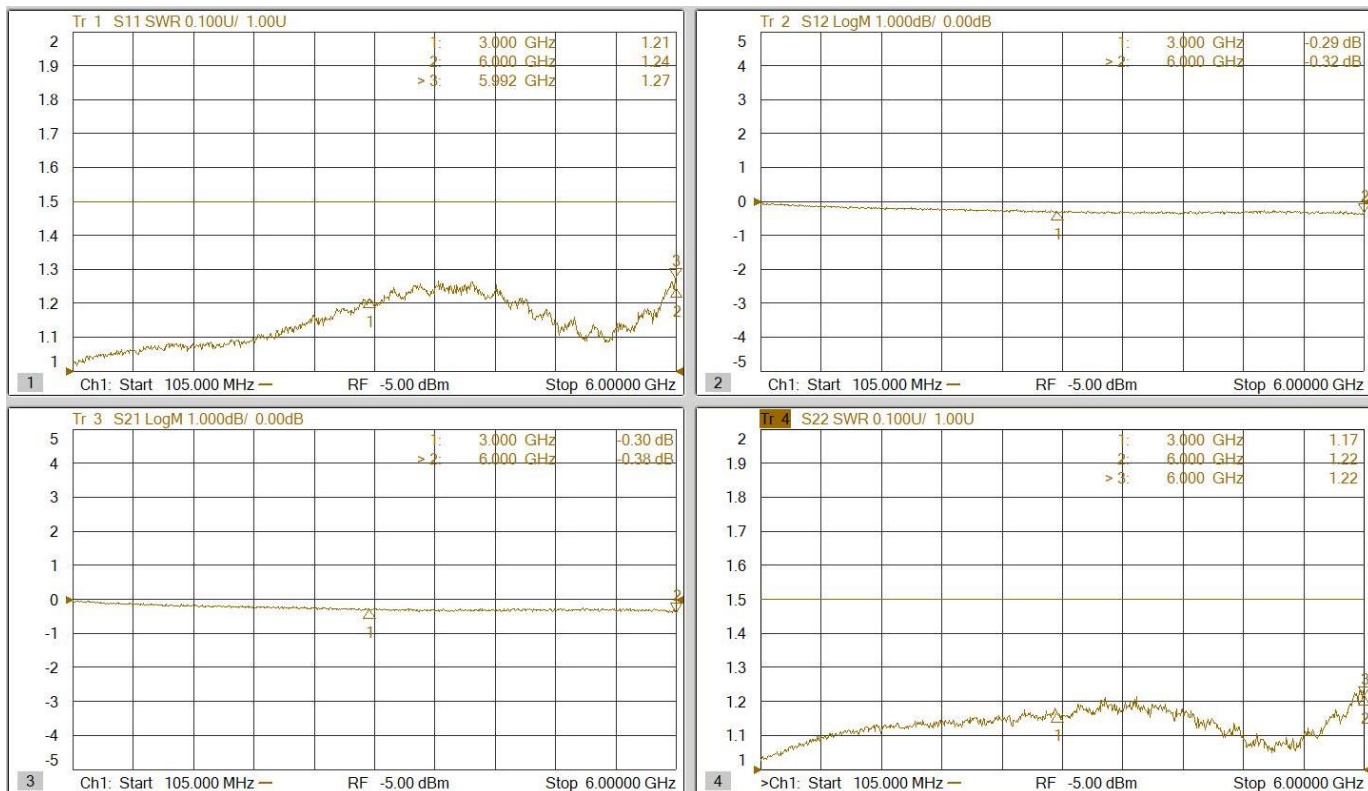

NOTES

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY