

COAXIAL ADAPTER

N-SMA Precision Series

Features

- ✓ Frequency up to 18 GHz
- ✓ High performance design
- ✓ Low VSWR




Specifications

PART NUMBER	MVE1381H
DESCRIPTION	50ohm N Male HEX To SMA Female, DC-18GHz Adapter
ELECTRICAL	MATERIALS
FREQUENCY : DC-18GHz IMPEDANCE: 50OHM WORKING VOLTAGE: 1000Vrms MAX. DIELECTRIC WITHSTANDING VOLTAGE: 2500Vrms MAX. INSULATOR RESISTANCE: 5000MEGOHMS MIN. VSWR: 1.3 MAX.	BODY: BRASS, ELECTROLESS NICKEL CONTACT: BE.COPPER, GOLD PLATED INSULATOR: PTFE C-RING: SUS304 GASKET: SILICON

TOLERANCE: X=±0.2 X.X=±0.1 X.XX=±0.05

Outline Drawing (Unit: mm)

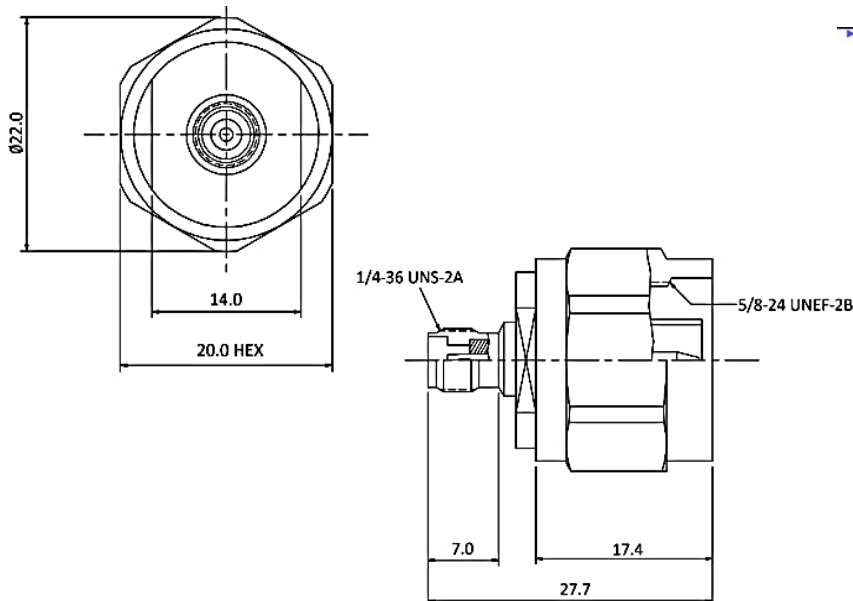

- NOTES:
1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
 2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

Typical Test Result

