

# COAXIAL ADAPTER

## TNC-SMA Standard Series

### Features

- ✓ Frequency Range: DC to 6GHz
- ✓ TNC To SMA Interface
- ✓ High Durability




### Specifications

<b>PART NUMBER</b>	MVE1582H	
<b>DESCRIPTION</b>	TNC Male Reverse To SMA Female Adapter, DC-6GHz	
	<b>ELECTRICAL</b>	<b>MATERIALS</b>
	FREQUENCY: DC-6GHz IMPEDANCE: 50Ω VSWR: 1.30:1 MAX. WITHSTANDING VOLTAGE: 1000V INSULATION RESISTANCE: ≥5000MΩ TEMPERATURE RANGE: -65 to +165°C DURABILITY: 500 CYCLES MIN.	BODY: BRASS, NICKLE PLATED COUPLING NUT: BRASS, NICKEL PLATED PIN CONTACT: PHOSPHOR BRONZE, GOLD PLATED INSULATOR: PTFE GASKET: SILICONE RUBBER

Tolerance: X=±0.5mm .X=±0.2mm

### Outline Drawing (Unit: mm)

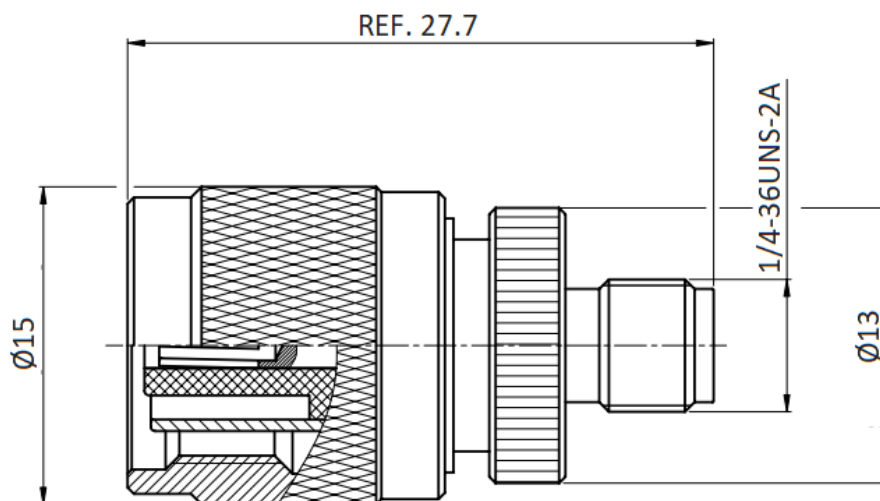

NOTES:  
 1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME  
 2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

