

DUAL DIRECTIONAL COUPLER

0.5-18GHz
SMA Series

Features

- ✓ Frequency Range:0.5-18GHz
- ✓ Full Frequency Bandwidth
- ✓ Low Insertion loss
- ✓ Low VSWR




Specifications

FREQUENCY RANGE: 0.5-18 GHz
CONNECTOR TYPE: SMA FEMALE
TEMPERATURE RANGE: -40°C TO +85°C

PART NUMBER	NOMINAL COUPLING	FREQUENCY SENSITIVITY	INSERTION LOSS MAX.	DIRECTIVITY MIN.	VSWR MAX.	AVERAGE POWER	PEAK POWER
MVE4925-20	20±1.5dB	±1.0dB	2.2dB	≥15dB@0.5-6GHz ≥10dB@6-18GHz	1.6:1	50W	1KW

Tolerance: ±0.5mm

Outline Drawing (Unit: mm)

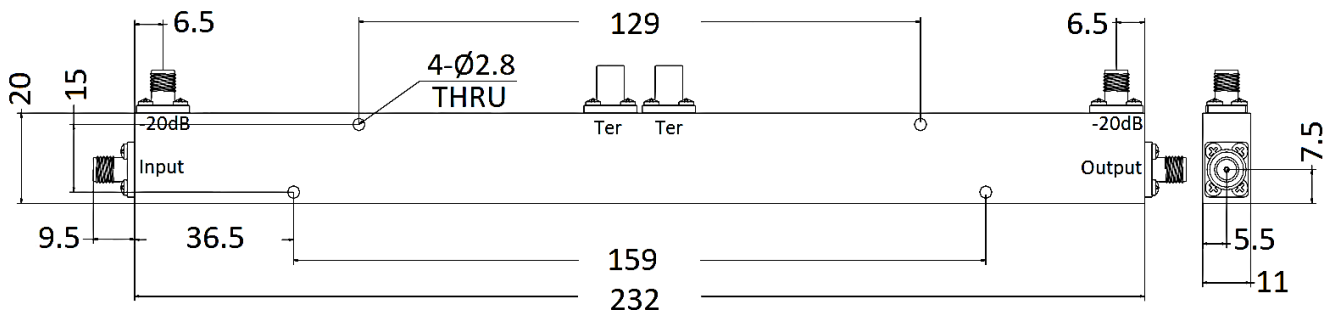


NOTES:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY




Typical Test Result


Coupling 1

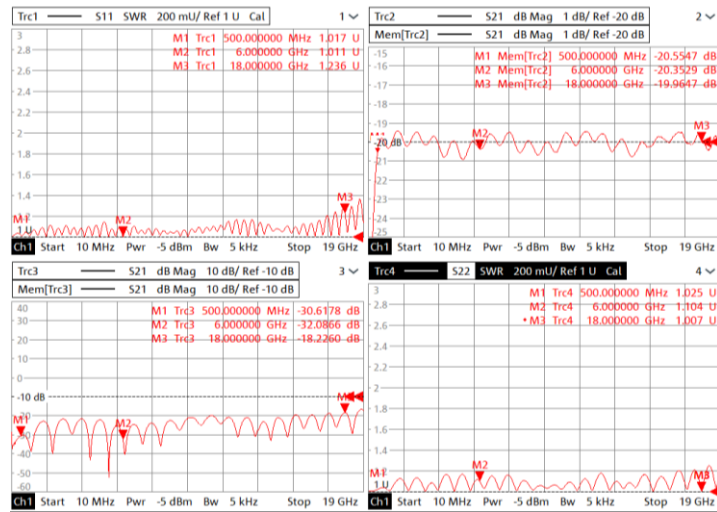

Coupling 2

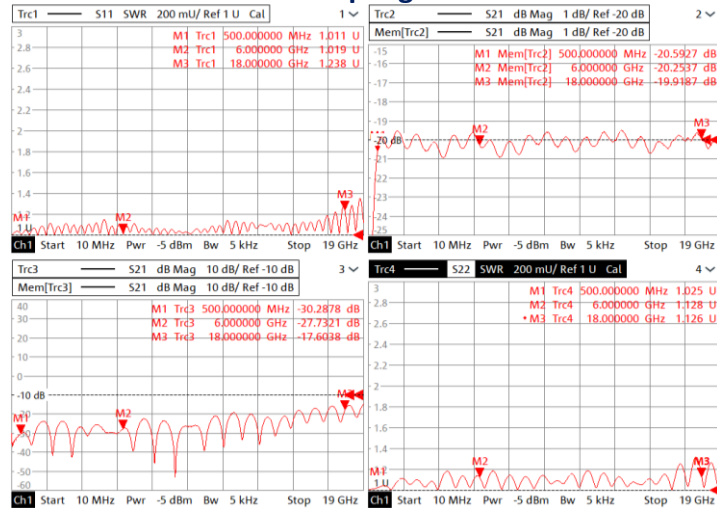

Insertion

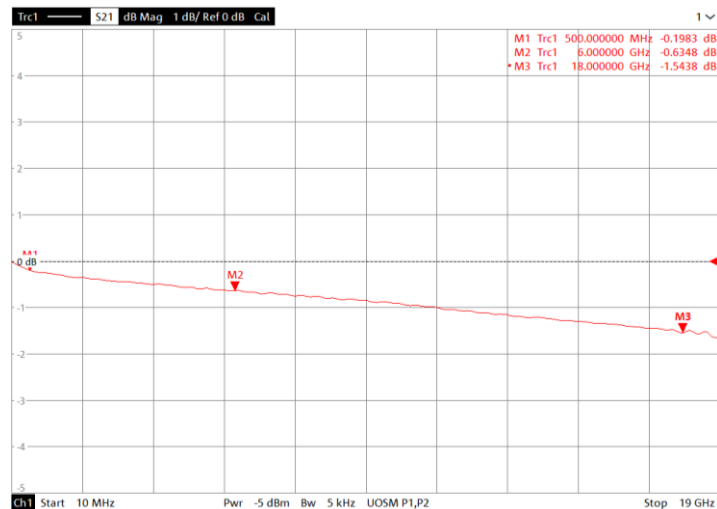

NOTES:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

