

COAXIAL ADAPTER

SMA-MHF4 Standard Series

Features

- ✓ Frequency Range: DC to 10GHz
- ✓ Low VSWR
- ✓ High performance design




Specifications

PART NUMBER	MVE1962A				
DESCRIPTION	50ohm SMA Female To MHF4 Female Adapter, DC-10GHz				
<table border="1"> <thead> <tr> <th>ELECTRICAL</th><th>MATERIALS</th></tr> </thead> <tbody> <tr> <td> FREQUENCY: DC-10GHz IMPEDANCE: 50ohm VSWR: 1.2:1 MAX. (DC-6GHz) 1.45:1 MAX. (6GHz-10GHz) DIELECTRIC WITHSTANDING VOLTAGE: 1000Vrms MAX. WORKING VOLTAGE: 170Vrms MAX. INSULATION RESISTANCE: 5000MEGOHMS MIN. </td><td> BODY: BRASS, ELECTORLESS NICKEL CONTACT: BE.COPPER, GOLD PLATED INSULATOR: PTFE </td></tr> </tbody> </table>		ELECTRICAL	MATERIALS	FREQUENCY: DC-10GHz IMPEDANCE: 50ohm VSWR: 1.2:1 MAX. (DC-6GHz) 1.45:1 MAX. (6GHz-10GHz) DIELECTRIC WITHSTANDING VOLTAGE: 1000Vrms MAX. WORKING VOLTAGE: 170Vrms MAX. INSULATION RESISTANCE: 5000MEGOHMS MIN.	BODY: BRASS, ELECTORLESS NICKEL CONTACT: BE.COPPER, GOLD PLATED INSULATOR: PTFE
ELECTRICAL	MATERIALS				
FREQUENCY: DC-10GHz IMPEDANCE: 50ohm VSWR: 1.2:1 MAX. (DC-6GHz) 1.45:1 MAX. (6GHz-10GHz) DIELECTRIC WITHSTANDING VOLTAGE: 1000Vrms MAX. WORKING VOLTAGE: 170Vrms MAX. INSULATION RESISTANCE: 5000MEGOHMS MIN.	BODY: BRASS, ELECTORLESS NICKEL CONTACT: BE.COPPER, GOLD PLATED INSULATOR: PTFE				

TOLERANCE: X=±0.2 X.X=±0.1 X.XX=±0.05

Outline Drawing (Unit: mm)

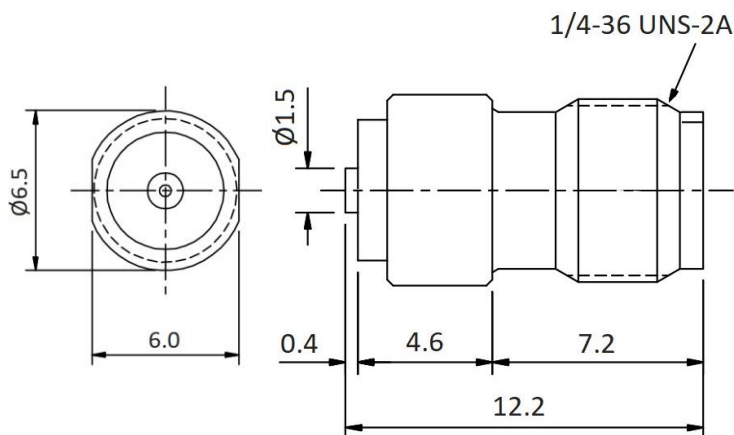

NOTES:

- ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
- CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

Typical Test Result

