

COAXIAL CONNECTOR

MMCX TYPE For Cable Assembly

Features

- ✓ Frequency up to 6 GHz
- ✓ Low VSWR
- ✓ High Durability




Specifications

PART NUMBER	MVE3892-9.2
DESCRIPTION	MMCX Male S/T For .085 connector, Solder DC-6GHz
ELECTRICAL	MATERIALS
FREQUENCY: DC-6GHz IMPEDANCE: 50 Ω VSWR: 1.25:1 MAX. WORKING VOLTAGE: 500VRMS MAX. INSULATION RESISTANCE: 500 M Ω DIELECTRIC WITHSTANDING VOLTAGE: 500VRMS MAX.	BODY: BRASS, GOLD PLATED CONTACT PIN: BRASS, GOLD PLATED INSULATOR: TEFLON

TOLERANCE: X=±0.2 X.X=±0.1 .XX=±0.05

Outline Drawing (Unit: mm)

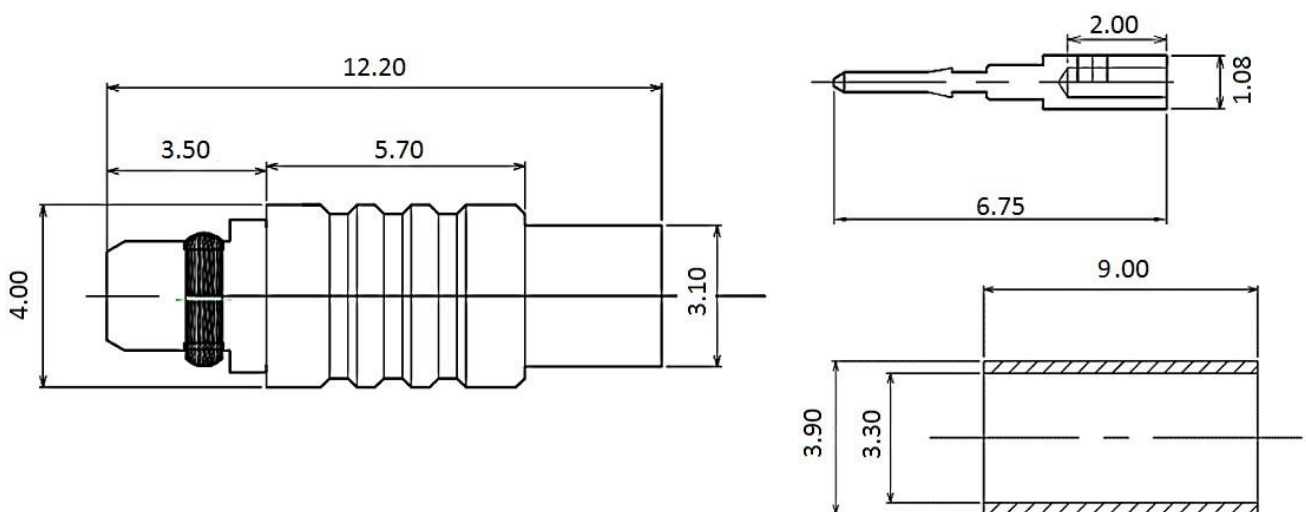

NOTES:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

