

ELECTRICAL DATA

FREQUENCY: DC-6GHz
IMPEDANCE: 50Ω
VSWR: 1.5:1@DC-6GHz

INSULATION RESISTANCE: 1000Mega-ohms
DIELECTRIC WITHSTANDING: 500Vrms


MECHANICAL DATA

COUPLING METHED: SNAP-ON
DURABILITY(MATING/UNMATING): 500 CYCLES

ROHS COMPLIANCE



LENGTH	P/N
300cm±5cm	MAC64Z810.F085.300A

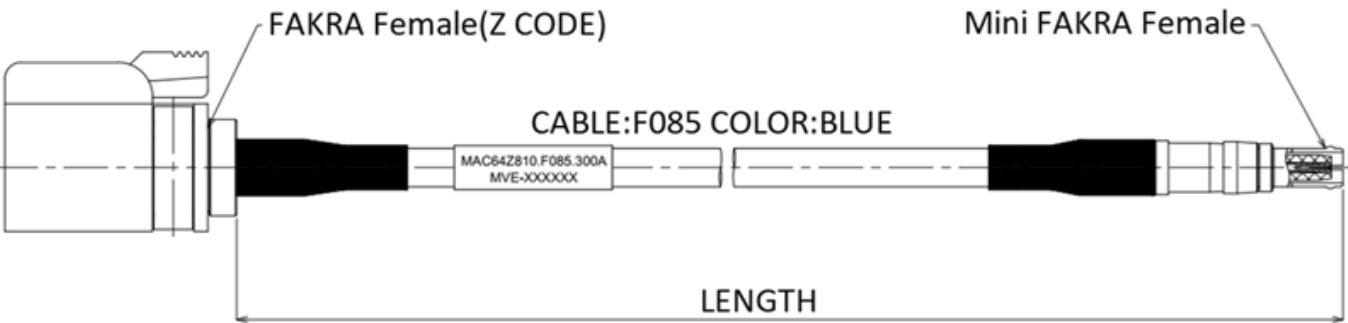

DESCRIPTION	MATERIALS	ROHS COMPLIANCE	UNIT: mm
SMPM FEMALE	BRASS, NICKEL/GOLD PLATED	TOLERANCE: X=±0.38 X.X=±0.25 X.XX=±0.15	
FAKRA FEMALE	BRASS, NICKEL/GOLD PLATED	TITLE SMPM Female To FAKRA Female(Z code), Flexible 085 Blue/L:XXcm	
INSULATOR	TEFLON		




芝程科技有限公司
www.micro-mve.com
DC-67GHz RF& Microwave Components

PART NO.		MAC64Z810.F085.XXA	REV 1.1
SIZE: A	SHEET: 1/1	SCALE:	

NOTES
1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

Typical Test Result

PART NUMBER	DESCRIPTION
MAC64Z810.F085.300A	FAKRA Female(Z CODE) to Mini FAKRA Female, Flexible 085 Blue/L:300cm, DC-6GHz

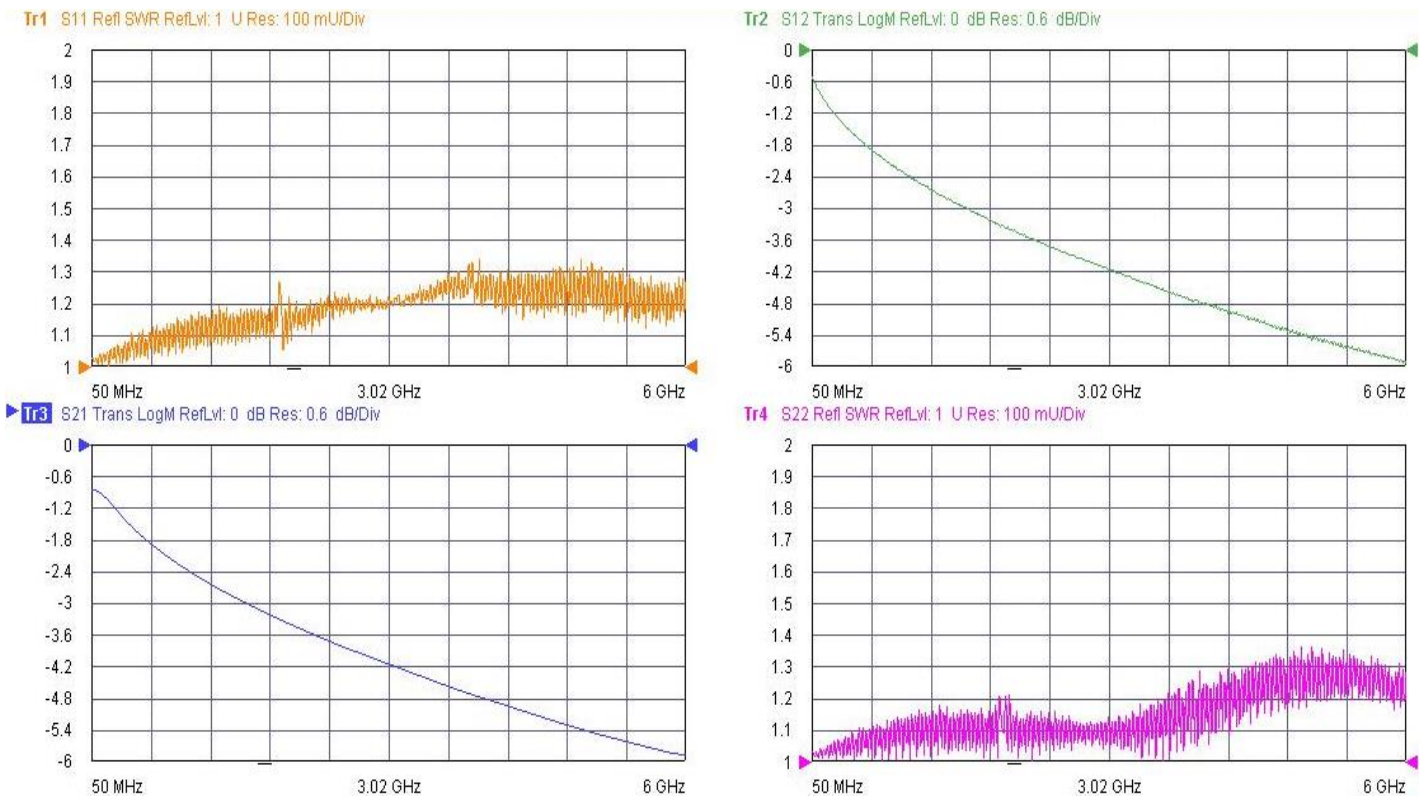

NOTES

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME

2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

