


ELECTRICAL DATA

FREQUENCY: DC-8GHz
IMPEDANCE: 50Ω
VSWR: 1.5:1@DC-8GHz
INSULATION RESISTANCE: 1000Mega-ohms
DIELECTRIC WITHSTANDING: 250Vrms

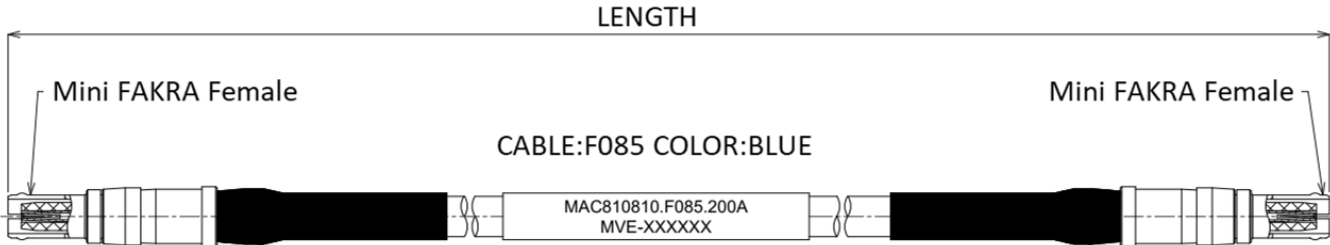

MECHANICAL DATA

COUPLING METHED: SNAP-ON
DURABILITY(MATING/UNMATING): 500 CYCLES

ROHS COMPLIANCE

LENGTH	P/N
200cm±2cm	MAC810810.F085.200A



DESCRIPTION	MATERIALS	ROHS COMPLIANCE	UNIT: mm
Mini Fakra Female	BRASS,NICKEL/GOLD PLATED	TOLERANCE: X=±0.38 X.X=±0.25 X.XX=±0.15	
INSULATOR	TEFLON	TITLE Mini Fakra Female To Mini Fakra Female, Flexible 085 Blue/Brass Tubing	



芝程科技有限公司
www.micro-mve.com
DC-67GHz RF& Microwave Components

PART NO.		MAC810810.F085.XXA	REV 1.1
SIZE: A	SHEET: 1/1	SCALE:	


NOTES

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME

2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

Typical Test Result

PART NUMBER	DESCRIPTION
MAC810810.F085.200A	Mini Fakra Female To Mini Fakra Female, Flexible 085 Blue/L:200cm/Brass Tubing, VSWR<1.5@DC-8GHz

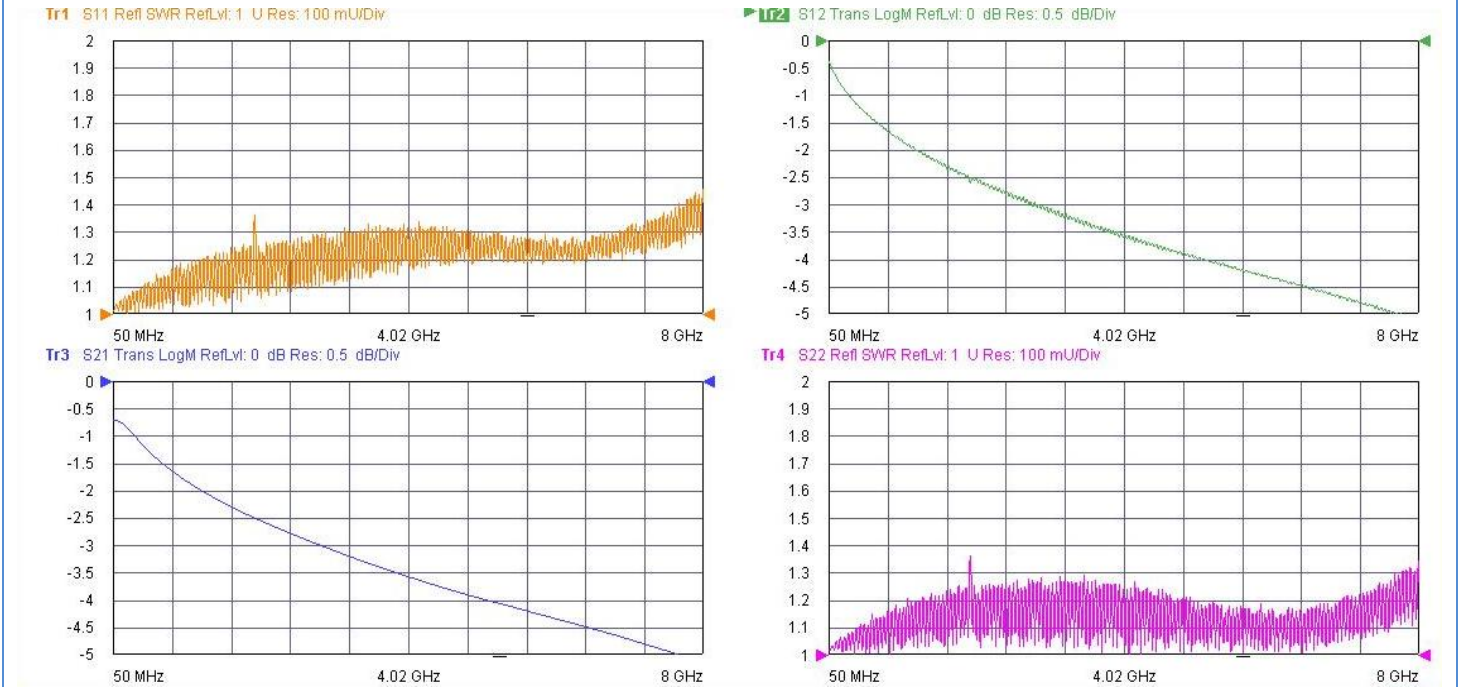

NOTES

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME

2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

