

COAXIAL ADAPTER

SMA END LAUNCH FOR PCB TYPE

Features

- ✓ Frequency Range: DC to 12.4GHz
- ✓ High interface performance
- ✓ High performance design




Specifications

PART NUMBER	MVE3701-1.35	
DESCRIPTION	SMA Female S/T End Launch For PCB Connector/1.35mm, DC-12.4GHz	
ELECTRICAL		MATERIALS
FREQUENCY : DC-12.4GHz IMPEDANCE: 50OHM WORKING VOLTAGE: 500Vrms MAX. DIELECTRIC WITHSTANDING VOLTAGE: 1000Vrms MAX. INSULATOR RESISTANCE: 5000MEGOHMS MIN.		BODY: BRASS, GOLD PLATED CONTACT: BE. COPPER, GOLD PLATED INSULATOR: PTFE

TOLERANCE: X=±0.2 X.X=±0.1 X.XX=±0.05

Outline Drawing (Unit: mm)


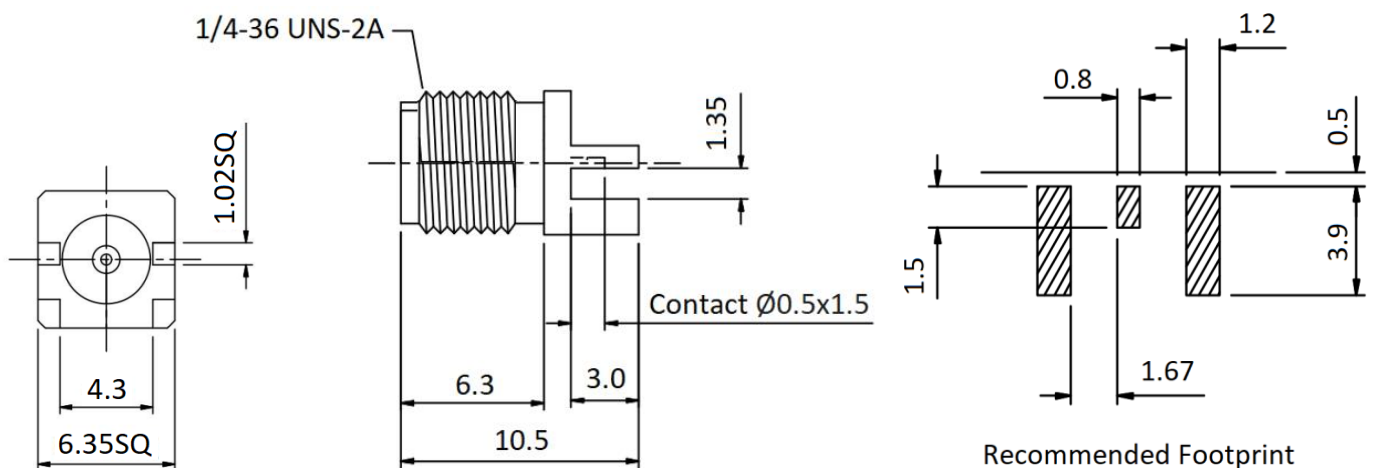


NOTES:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY



Typical Test Result

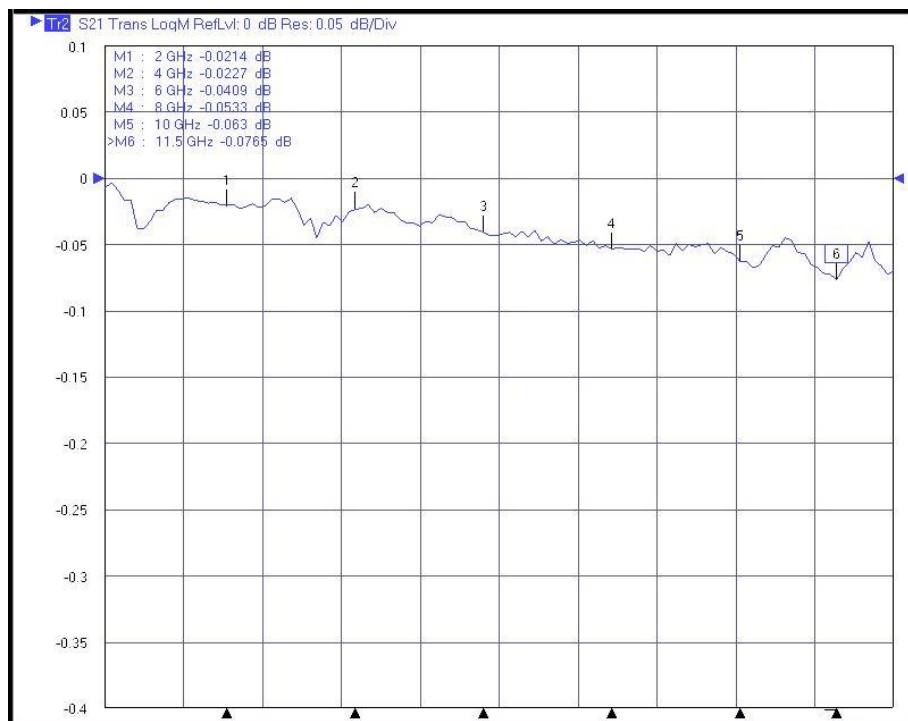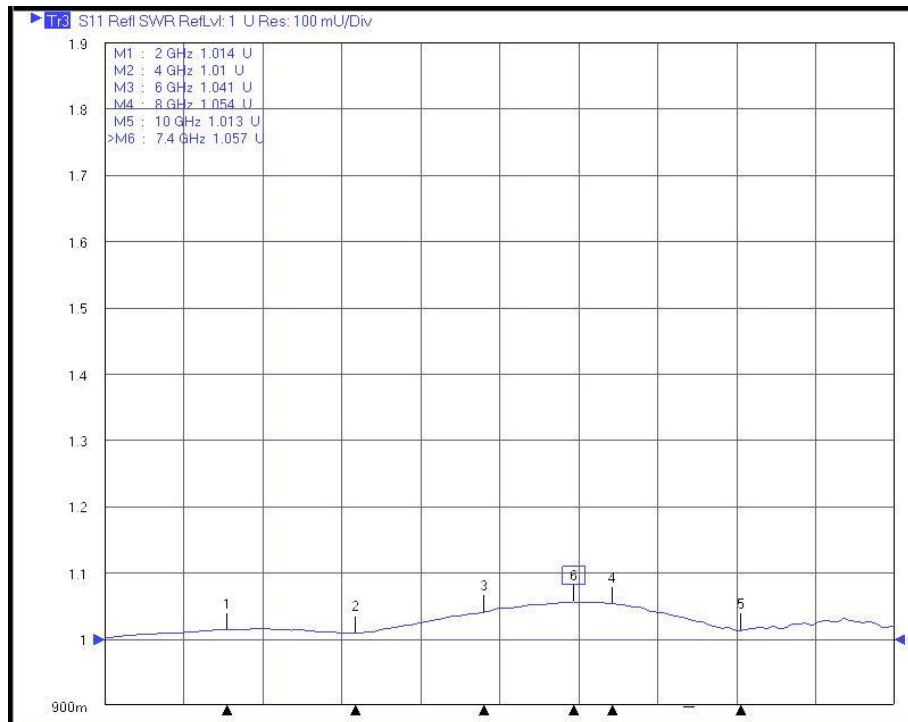

NOTES:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

