


STANDARD COAXIAL CABLE ASSEMBLIES

MVE standard coaxial cable can provide not only inexpensive cost but also a lot of variety models to meet your needs. The overall diameter of flexible series is including, 2.59mm(RG316) , 2.93mm(RG316 Double Shielding), 0.085inch(F085/SS405), 0.141inch(F141/SS402); Semi-flex series are including: 0.085 inch(SF085/RG405), 0.141inch(SF141/RG402); Semi-rigid series are including: 0.034inch(SR034), 0.047 inch(SR047);0.085 inch(SR085); 0.141inch (SR141). In the meantime, MVE can offer customized services and support the optimization of cable assembly. With MVE service, customize product to let user easy to install. MVE is aimed to provide a wide range of performance coaxial cable for various demands.

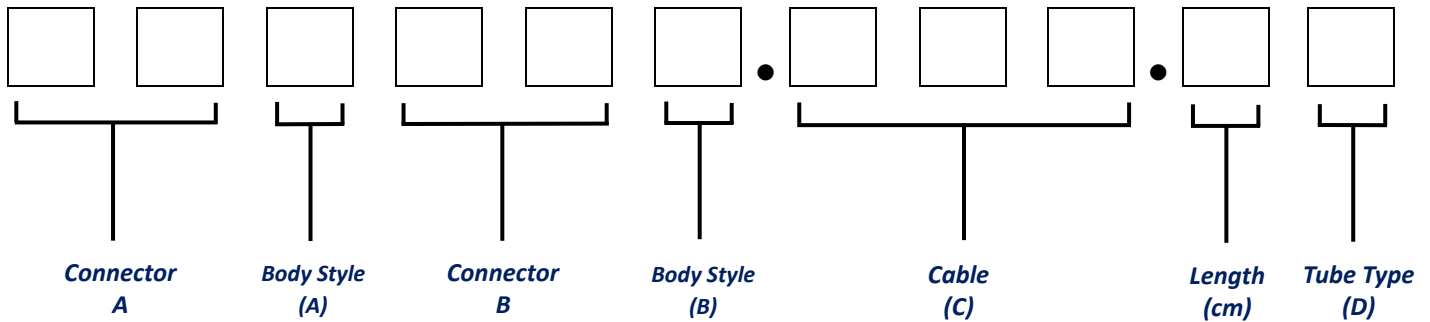

No	Conn. A/B
10	1.85mm-M
11	1.85mm-F
12	2.4mm-M
13	2.4mm-F
14	2.9mm-M
15	2.9mm-F
16	3.5mm-M
17	3.5mm-F
18	APC7-M
19	APC7-F
20	BNC-M
21	BNC-F
22	MCX-M
23	MCX-F
24	MMCX-M
25	MMCX-F
26	N-M
27	N-F
28	SMA-M
29	SMA-F
30	SSMA-M
31	SSMA-F
32	TNC-M
33	TNC-F
34	MHF202781-M

No	Conn. A/B
35	75ΩBNC-M
36	75ΩBNC -F
37	MHF20311-M
38	75ΩF-M
39	75ΩF-F
40	MHF20367-M
41	MHF20448-M
42	75ΩN-M
43	75ΩN-F
44	75ΩSMB-M
45	75ΩSMB-F
46	MS147-M
47	MM8430-M
48	SMP-F
49	MHF20428-M
50	SMB-F
51	SMB-M
52	UHF-F
53	UHF-M
54	Fakra SMB-M
55	Fakra SMB-F
56	MM8030-M
57	7/16DIN-M
58	MS180-M
59	MS162-M

No	Conn. A/B
60	CRC9-M
61	MS162-M
62	SSMCX-M
63	SMPM-M
64	FAKRA-M
65	TS9A-M
66	MS156C-M
67	MHF20567-M
68	MS156-M
69	MM8930-M
No	Body Style
0	Standard
1	Reverse
2	Right angle
3	Quick
4	RP-Right angle
5	RP-Quick
6	Bulkhead
7	Opposite Direction R/A
8	2Hole Flange
9	RP-Bulkhead
A	Quick/No hex
B	4Hole Flange

No	Coaxial Cables ©
6	RG-6(U)
58	RG58(U)
59	RG59
081	Mini-coaxial 0.81mm
113	Mini-coaxial 1.13mm
137	Mini-coaxial 1.37mm
142	RG-142
174	RG-174
178	RG-178
214	RG-214
316	RG-316
316D	RG-316 Doubt Shield
400	RG-400
F085	SS405
F141	SS402
SF085	RG405
SF141	RG402
SF085JB	RG405(Blue Jacket)
SF141JB	RG402(Blue Jacket)
SPF085	SFL405
SPF141	SFL402
SR034	Semi-rigid 034
SR047	Semi-rigid 047
SR085	Semi-rigid RG405
SR141	Semi-rigid RG402
200LL	200LL,LMR200
400LL	400L,CFD400,LMR400
600LL	600LL,LMR600
2CS	AWG28 x2C
3CS	AWG28 x3C

Code(D)	A	B	C
Tube Type	Brass Tubing	Double Heat-shrink Tubing	Rigid Glued Tubing

COAXIAL CABLE

MCBL-F085.50

MULTI-FLEXIBLE(SS405)

Features

- ✓ Frequency up to 20GHz
- ✓ Excellent shielding effect
- ✓ Fully flexible for ease of installation
- ✓ Meet to Standard Mil-C-17



CONSTRUCTION		
ITEM	MATERIAL	DIAMETER
CENTER CONDUCTOR	SPCW	0.51 mm
DIELECTRIC	PTFE	1.63 mm
INNER SHIELD	SPCS	1.8 mm
OUTER SHIELD	SPC	2.18 mm
JACKET	FEP(Blue)	2.64 mm
ELECTRICAL DATA		
ITEM	SPECIFICATION	
CUT-OFF FREQUENCY	20 GHz	
IMPEDANCE	50 Ω	
CAPACITANCE	96 pF/m	
BENDIGN RADIU	6mm	
TEST VOLTAGE	50000 Vrms @1Min	
SHIELDING EFFECT	>-100 dB	
WORKING VOLTAGE	1,500 Vrms (MAX.)	
MIN. BENDING RADIUS	6 mm (Single)	
VELOCITY OF PROPAGATION	70.0 %	
TEMPERTURE	-55°C ~ +200°C	
WEIGHT	19.1 kg/Km	
MAXIMUM ATTENUATION		
FREQUENCY	ATTENUATION dB/m	ATTENUATION dB/ft
1GHz	0.75	0.229
3GHz	1.29	0.393
5GHz	1.71	0.521
10GHz	2.56	0.780
18GHz	3.57	1.088
20GHz	3.80	1.158



NOTES:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY



Cable Assembly Part Number

MVE PART NUMBER	CONNECTOR 1	CONNECTOR 2	XX- LENGTH (cm)	FREQUENCY (GHz)	VSWR (TYP.)
220222.F085.XX	MCX Male S/T	MCX Male R/A	15, 30, 50, 60, 90, 100	6.0	1.35
222222.F085.XX	MCX Male R/A	MCX Male R/A	15, 30, 50, 60, 90, 100	6.0	1.35
240242.F085.XX	MMCX Male S/T	MMCX Male R/A	15 ,30, 50, 60, 90, 100	6.0	1.35
240250.F085.XX	MMCX Male S/T	MMCX Female S/T	15 ,30, 50, 60, 90, 100	6.0	1.30
240280.F085.XX	MMCX Male S/T	SMA Male S/T	15 ,30, 50, 60, 90, 100	6.0	1.30
240280.F085.XX-8G	MMCX Male S/T	SMA Male S/T	15 ,30, 50, 60, 90, 100	8.0	1.40
240283.F085.XX-8G	MMCX Male S/T	SMA Male Quick	15 ,30, 50, 60, 90, 100	8.0	1.45
240290.F085.XX	MMCX Male S/T	SMA Female S/T	15 ,30, 50, 60, 90, 100	6.0	1.30
240290.F085.XX-8G	MMCX Male S/T	SMA Female S/T	15 ,30, 50, 60, 90, 100	8.0	1.45
242250.F085.XX	MMCX Male R/A	MMCX Female S/T	15 ,30, 50, 60, 90, 100	6.0	1.30
242280.F085.XX	MMCX Male R/A	SMA Male S/T	15, 30, 50, 60, 90, 100	6.0	1.30
242280.F085.XX-8G	MMCX Male R/A	SMA Male S/T	15, 30, 50, 60, 90, 100	8.0	1.45
242282.F085.XX	MMCX Male R/A	SMA Male R/A	15, 30, 50, 60, 90, 100	6.0	1.35
242290.F085.XX	MMCX Male R/A	SMA Female S/T	15, 30, 50, 60, 90, 100	6.0	1.30
242296.F085.XX	MMCX Male R/A	SMA Female B.H	15, 30, 50, 60, 90, 100	6.0	1.30
250280.F085.XX	MMCX Female	SMA Male S/T	15, 30, 50, 60, 90, 100	6.0	1.30
280280.F085.XX	SMA Male S/T	SMA Male S/T	30, 45, 50, 60, 90, 100	10.0	1.30
280280.F085.XX(H)	SMA Male S/T	SMA Male S/T	30, 45, 50, 60, 90, 100	18.0	1.35
280280.F085.XX(H3)	SMA Male S/T	SMA Male S/T	30, 45, 50, 60, 90, 100	18.0	1.40
280280.F085.XX(FC50)	SMA Male S/T	SMA Male S/T	30, 45, 50, 60, 90, 100	10.0	1.30
280281.F085.XX	SMA Male S/T	SMA Male (RP) S/T	30, 45, 50, 60, 90, 100	6.0	1.30
280282.F085.XX	SMA Male S/T	SMA Male R/A	30, 45, 50, 60, 90, 100	6.0	1.30
280282.F085.XX-8G	SMA Male S/T	SMA Male R/A	30, 45, 50, 60, 90, 100	8.0	1.35
280283.F085.XX	SMA Male S/T	SMA Male Quick	30, 45, 50, 60, 90, 100	10.0	1.35
280290.F085.XX	SMA Male S/T	SMA Female S/T	30, 45, 50, 60, 90, 100	10.0	1.30
280291.F085.XX	SMA Male S/T	SMA Female (RP) S/T	30, 45, 50, 60, 90, 100	10.0	1.30
280296.F085.XX	SMA Male S/T	SMA Female B.H	30, 45, 50, 60, 90, 100	10.0	1.35
282282.F085.XX	SMA Male R/A	SMA Male R/A	30, 45, 50, 60, 90, 100	6.0	1.30
282290.F085.XX	SMA Male R/A	SMA Female S/T	30, 45, 50, 60, 90, 100	8.0	1.35
290290.F085.XX(H3)	SMA Female S/T	SMA Female S/T	30, 45, 50, 60, 90, 100	18.0	1.40
290482.F085.XX(H3)	SMA Female S/T	SMP Female R/A	30, 45, 50, 60, 90, 100	12.4	1.40

NOTES:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME

2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

4F., No.258, Sec. 1, Wenhua 1st Rd., Linkou Dist., New Taipei City 244, Taiwan (R.O.C.)

www.micro-mve.com E-mail:sales@micro-mve.com Tel:+886-2-2602-0660

REV5.8(



Cable Assembly Part Number

MVE PART NUMBER	CONNECTOR 1	CONNECTOR 2	XX- LENGTH (cm)	FREQUENCY (GHz)	VSWR (TYP.)
342280.F085.XX	MHF1	SMA Male S/T	15, 30, 50, 60, 90, 100	8.0	1.50
342296.F085.XX	MHF1	SMA Female B.H	15, 30, 50, 60, 90, 100	8.0	1.50
480280.F085.XX(H)	SMP Female S/T	SMA Male S/T	15, 30, 50, 60, 90, 100	18.0	1.40
480280.F085.XX(H3)	SMP Female S/T	SMA Male S/T	15, 30, 50, 60, 90, 100	18.0	1.40
480290.F085.XX(H3)	SMP Female S/T	SMA Female S/T	15, 30, 50, 60, 90, 100	12.4	1.40
480480.F085.XX	SMP Female S/T	SMP Female S/T	15, 30, 50, 60, 90, 100	12.4	1.40
482482.F085.XX	SMP Female R/A	SMP Female R/A	15, 30, 50, 60, 90, 100	6.0	1.40

*Definition of Length: " XX "

Length ≤ 30 CM, the length cable is referring to exclude two terminal length of connector.

Length > 30 CM, the length cable is referring to include two terminal length of connector.

**Definition of Tolerance

Length ≤ 10 cm: ± 0.5 cm , Length ≤ 30 cm: ± 1.0 cm , Length ≤ 50 cm: ± 2.0 cm ,
Length ≤ 100 cm: ± 2.5 cm, Length > 101 cm: ± 3.0 cm

***Estimate of Cable Assembly loss

Cable assembly loss =Connector loss + Assembly loss + Cable loss

Connector Loss: $0.08 \times \sqrt{\text{Frequency}} \times 2$ (2 connectors)

Assembly Loss : $0.12 \times 2(\text{sides})$

Cable Loss: per cable attenuation (Max.) * Cable length

NOTES:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME

2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

4F., No.258, Sec. 1, Wenhua 1st Rd., Linkou Dist., New Taipei City 244, Taiwan (R.O.C.)

www.micro-mve.com E-mail:sales@micro-mve.com Tel:+886-2-2602-0660


REV5.8




Typical Test Result

PART NUMBER	DESCRIPTION
222222.F085.12A	MCX Male R/A ToMCX Male R/A, Flexible 085 Blue/L:12cm/Brass Tubing


Tr1 S11 Refl SWR RefLvl: 1 U Res: 100 mU/Div

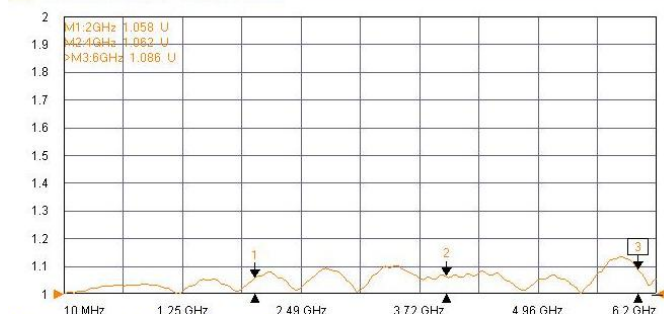


Tr3 S21 Trans LogM RefLvl: 0 dB Res: 1 dB/Div

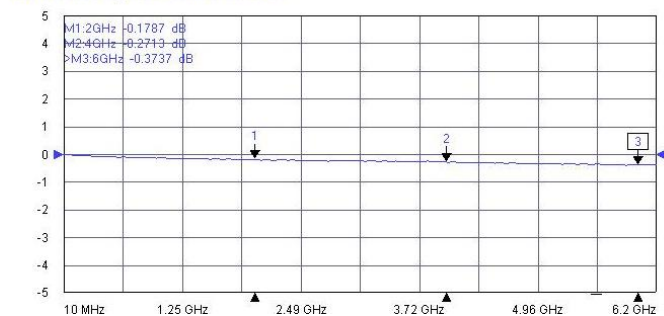

Tr2 S12 Trans LogM RefLvl: 0 dB Res: 1 dB/Div

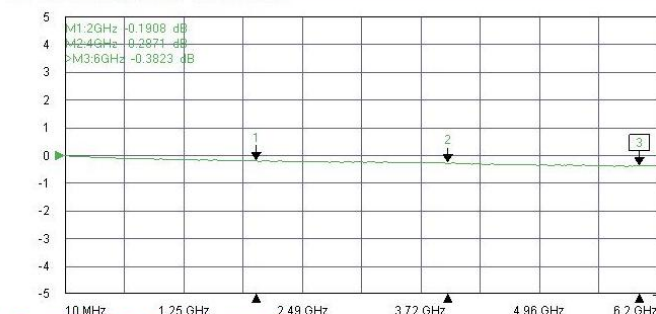


Tr4 S22 Refl SWR RefLvl: 1 U Res: 100 mU/Div

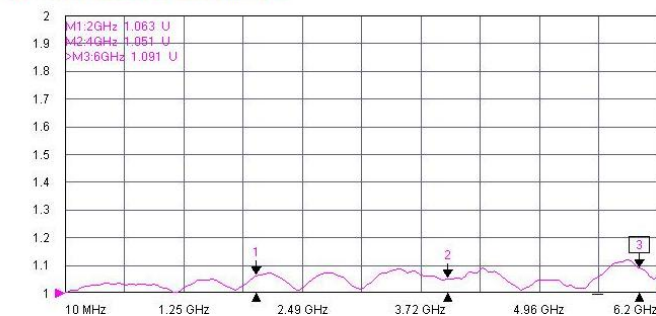

Typical Test Result


PART NUMBER	DESCRIPTION
240242.F085.100A	MMCX Male To MMCX Male R/A, Flexible 085 Blue/L:100cm/Brass Tubing

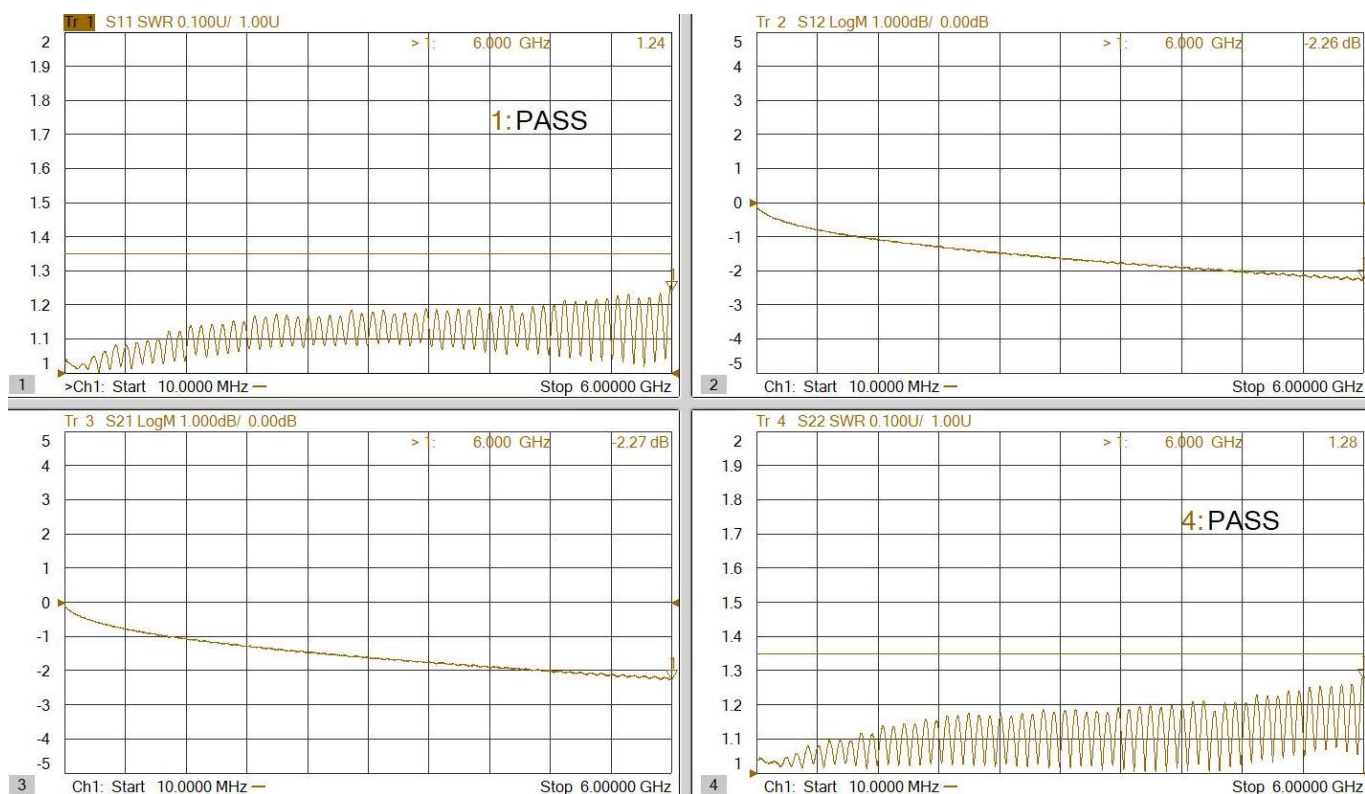


Typical Test Result

PART NUMBER	DESCRIPTION
240280.F085.30A	MMCX Male To SMA Male, Flexible 085 Blue/L:30cm/Brass Tubing


Tr1 S11 Refl SWR RefLvl: 1 U Res: 100 mU/Div

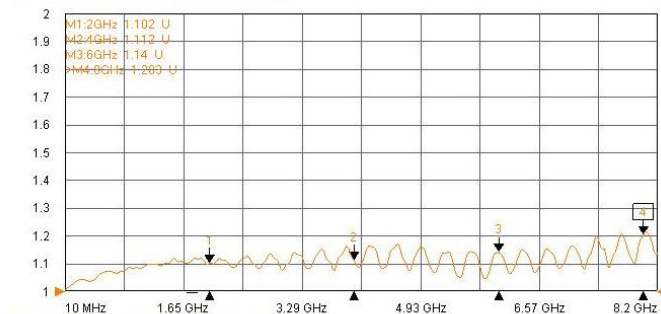


Tr3 S21 Trans LogM RefLvl: 0 dB Res: 1 dB/Div

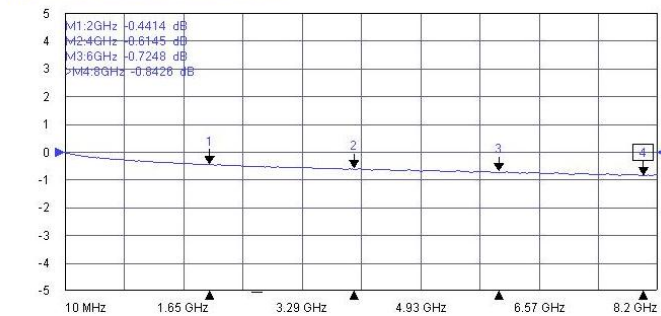

Tr2 S12 Trans LogM RefLvl: 0 dB Res: 1 dB/Div

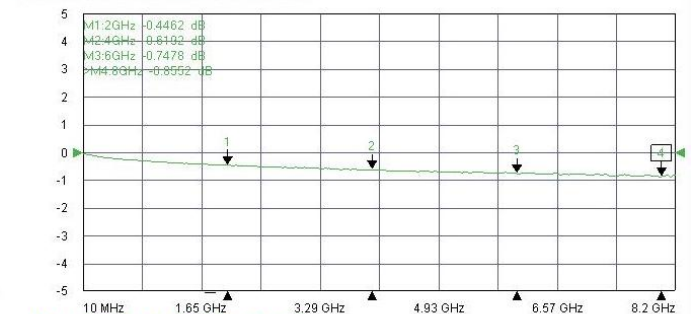


Tr4 S22 Refl SWR RefLvl: 1 U Res: 100 mU/Div

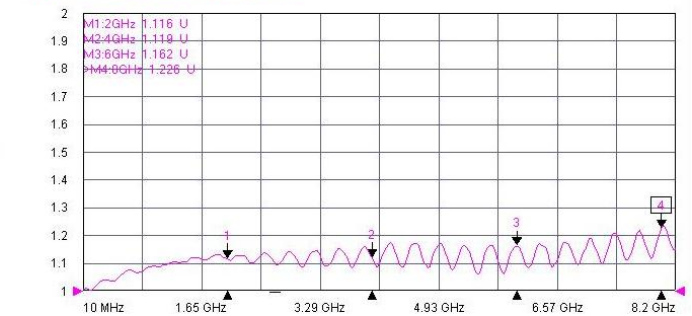


Typical Test Result

PART NUMBER	DESCRIPTION
240280.F085.30A-8G	MMCX Male To SMA Male, Flexible 085 Blue/L:30cm/Brass Tubing/DC-8GHz


Tr1 S11 Refl SWR RefLvl: 1 U Res: 100 mV/Div

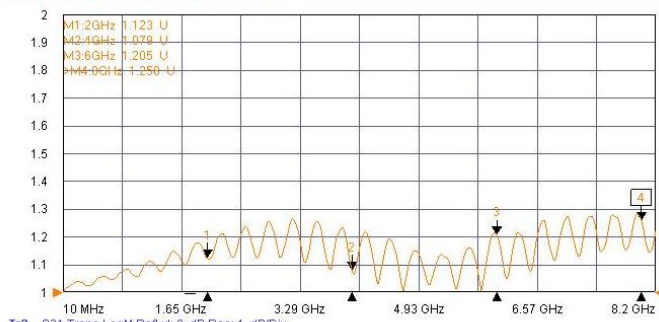


Tr2 S12 Trans LogM RefLvl: 0 dB Res: 1 dB/Div

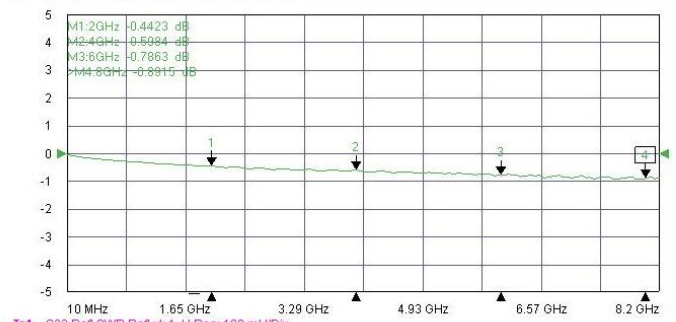

Tr3 S21 Trans LogM RefLvl: 0 dB Res: 1 dB/Div

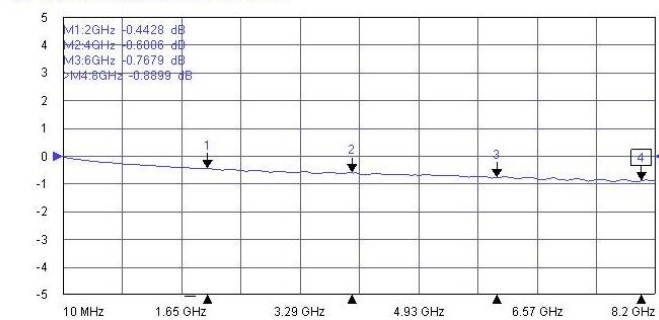


Tr4 S22 Refl SWR RefLvl: 1 U Res: 100 mV/Div

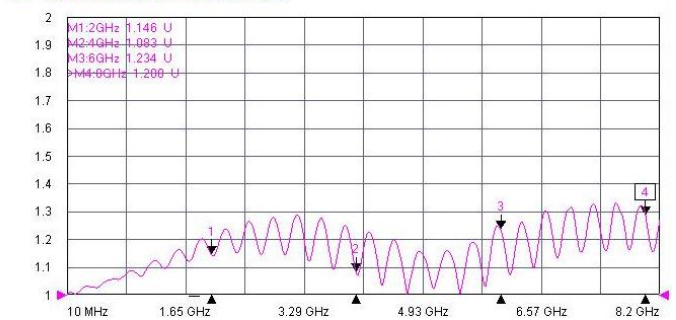


Typical Test Result

PART NUMBER	DESCRIPTION
240283.F085.60A-8G	MMCX Male To SMA Male Quick, Flexible 085 Blue/L:60cm/Brass Tubing/DC-8GHz


Tr1 S11 Refl SWR RefLvl: 1 U Res: 100 mU/Div

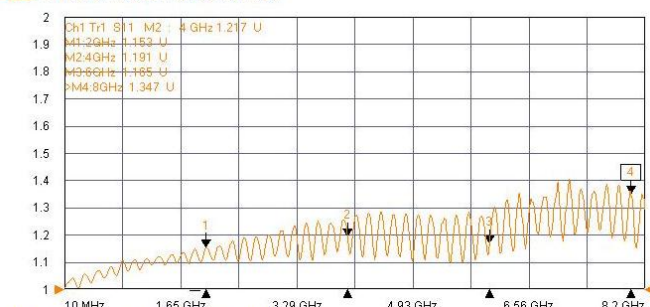


Tr3 S21 Trans LogM RefLvl: 0 dB Res: 1 dB/Div

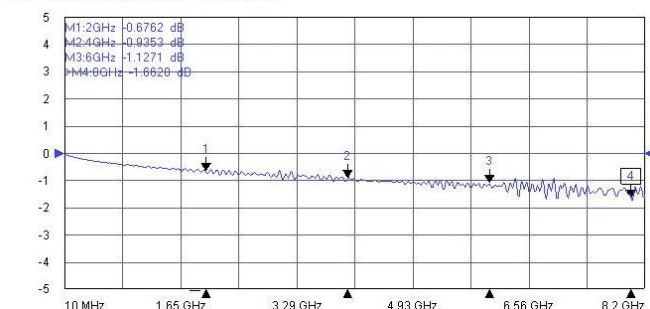

Tr2 S12 Trans LogM RefLvl: 0 dB Res: 1 dB/Div

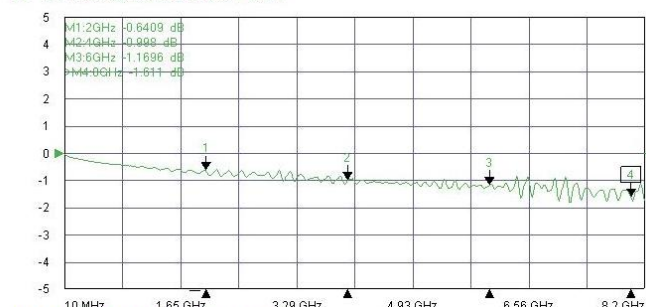


Tr4 S22 Refl SWR RefLvl: 1 U Res: 100 mU/Div

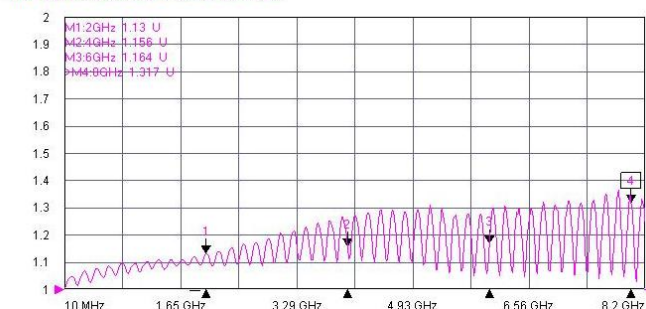


Typical Test Result

PART NUMBER	DESCRIPTION
240290.F085.15A	MMCX Male To SMA Female,,Flexible 085 Blue/L:15cm/Brass Tubing


Tr1 S11 Refl SWR RefLvl: 1 U Res: 100 mU/Div

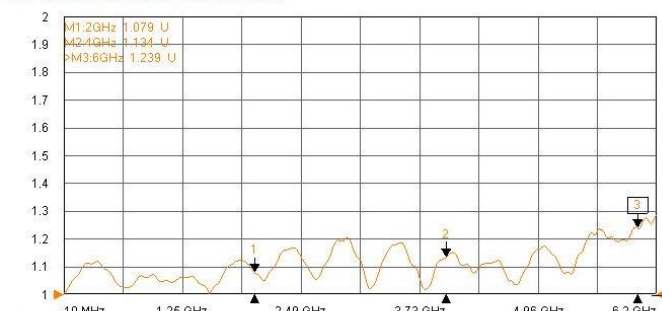


Tr2 S12 Trans LogM RefLvl: 0 dB Res: 1 dB/Div

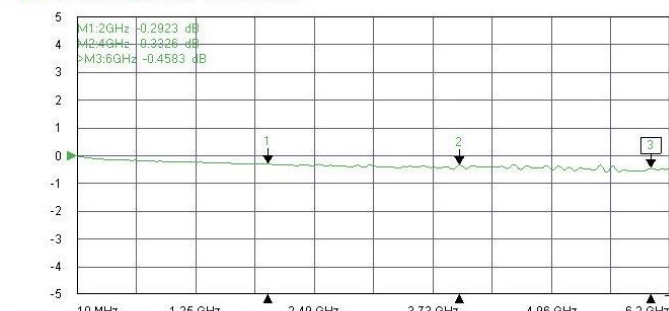

Tr3 S21 Trans LogM RefLvl: 0 dB Res: 1 dB/Div

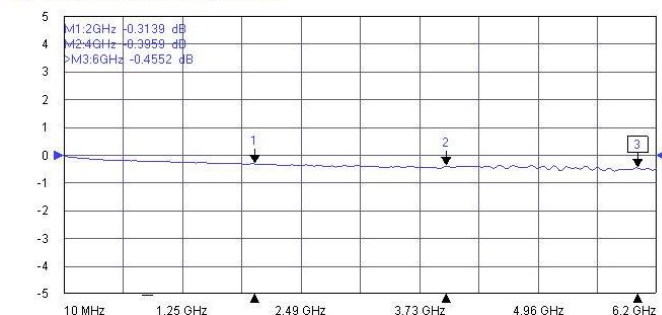

Tr4 S22 Refl SWR RefLvl: 1 U Res: 100 mU/Div

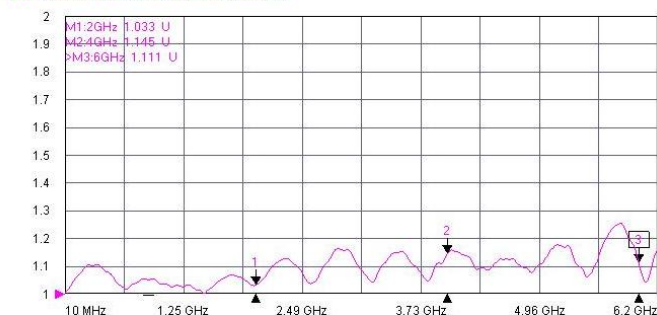


Typical Test Result





Typical Test Result

PART NUMBER	DESCRIPTION
242280.F085.30A	MMCX Male R/A To SMA Male, Flexible 085 Blue/L:30cm/Brass Tubing


Tr1: S11 Refl SWR RefLvl: 1 U Res: 100 mU/Div

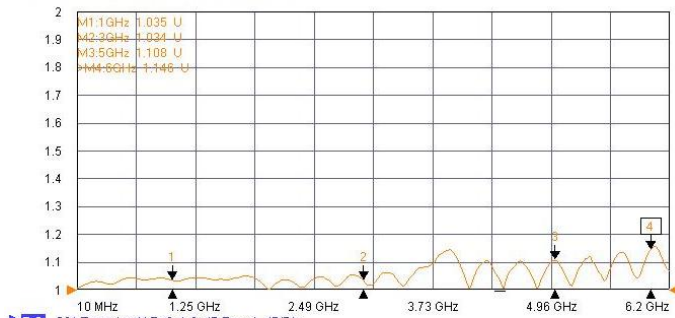

Tr2: S12 Trans LogM RefLvl: 0 dB Res: 1 dB/Div

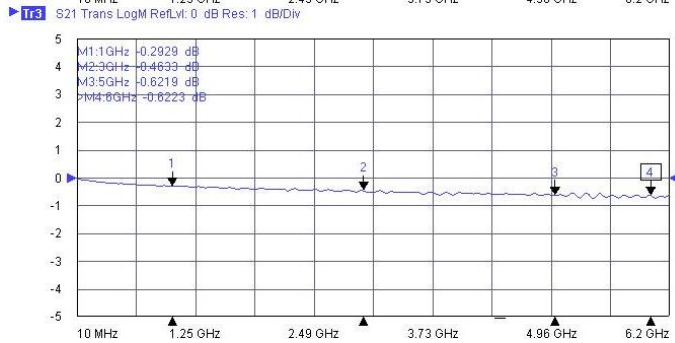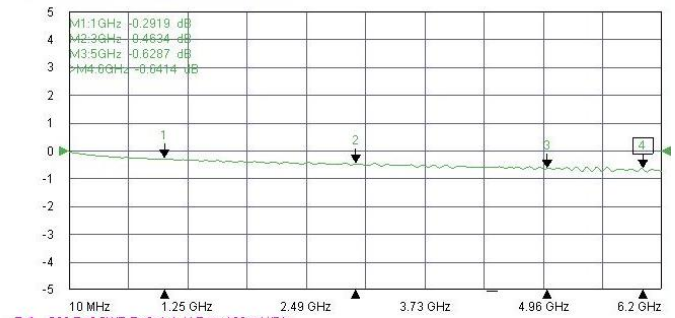


Tr4: S22 Refl SWR RefLvl: 1 U Res: 100 mU/Div

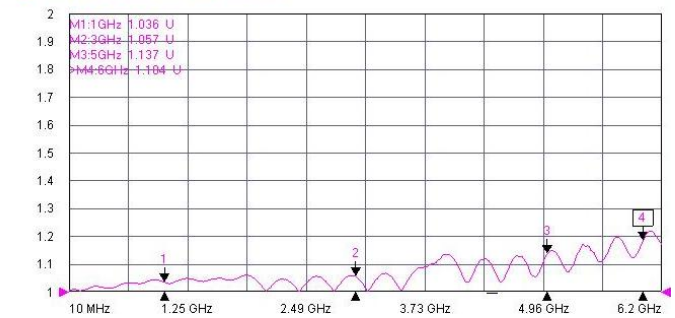


Typical Test Result

PART NUMBER	DESCRIPTION
242280.F085.30A-8G	MMCX Male R/A To SMA Male, Flexible 085 Blue/L:30cm/Brass Tubing, DC-8GHz


Tr1 S11 Refl SWR RefLvl: 1 U Res: 100 mU/Div

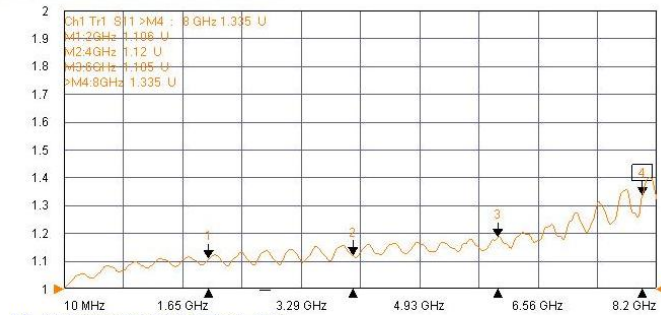


Tr3 S21 Trans LogM RefLvl: 0 dB Res: 1 dB/Div

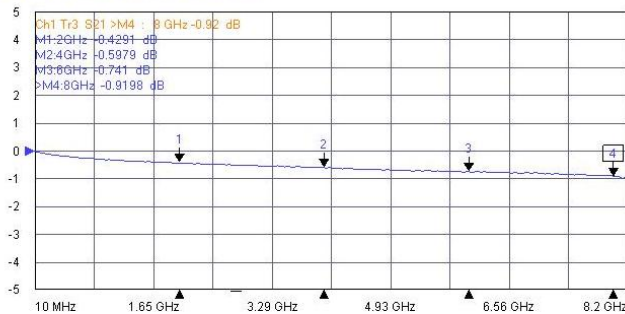

Tr2 S12 Trans LogM RefLvl: 0 dB Res: 1 dB/Div

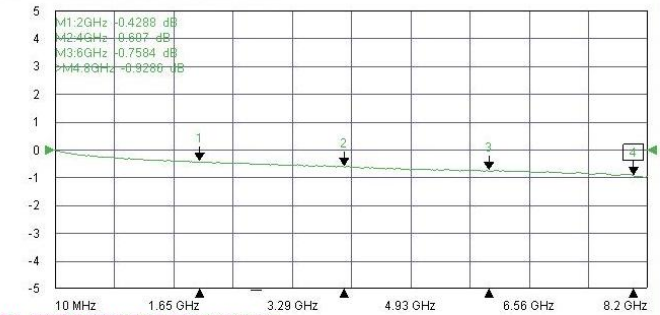


Tr4 S22 Refl SWR RefLvl: 1 U Res: 100 mU/Div

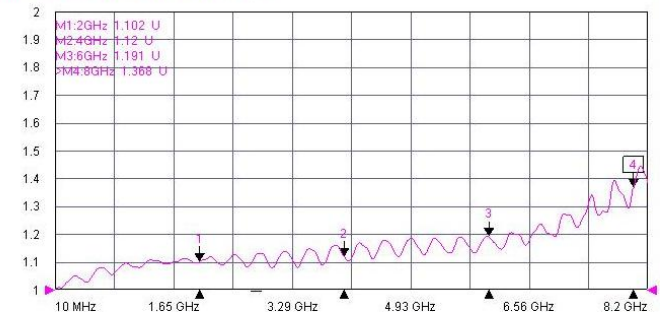

Typical Test Result


PART NUMBER	DESCRIPTION
242282.F085.20A	MMCX Male R/A To SMA Male R/A, Flexible 085 Blue/L:20cm/Brass Tubing

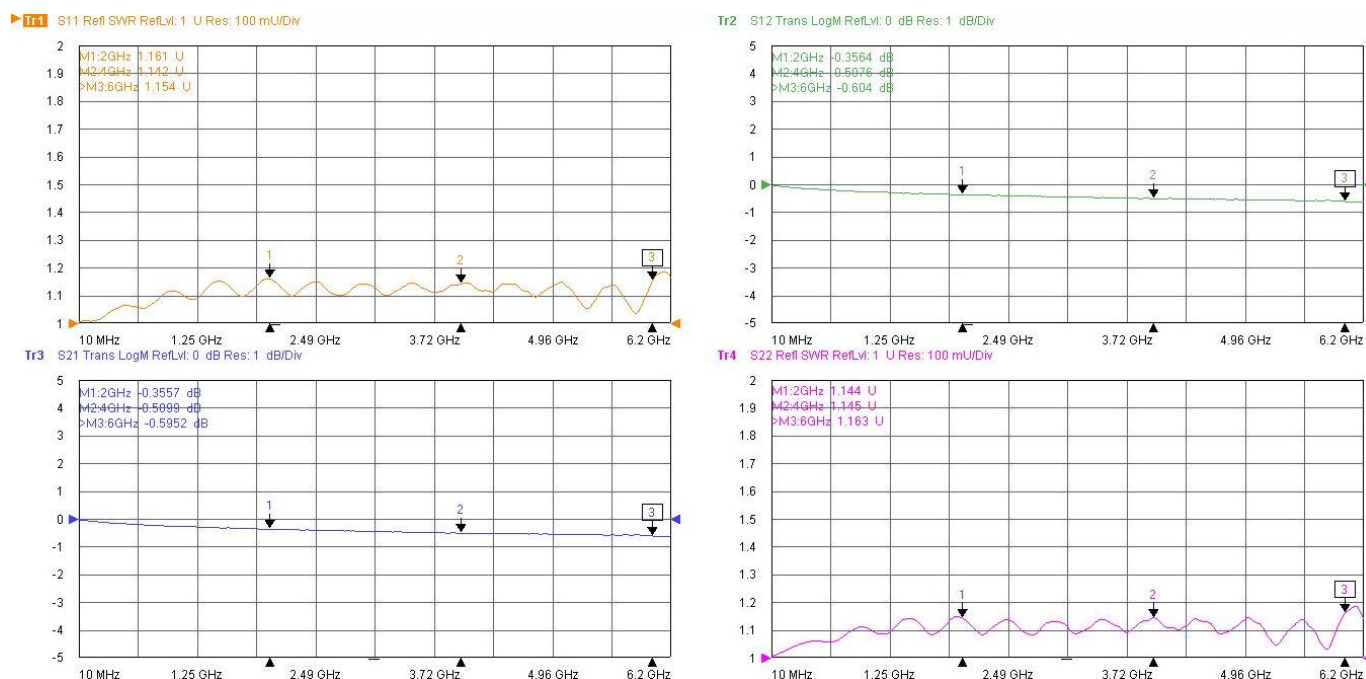


Typical Test Result

PART NUMBER	DESCRIPTION
242290.F085.20A	MMCX Male R/A To SMA Female, Flexible 085 Blue/L:20cm/Brass Tubing


Tr1 S11 Refl SWR RefLvl: 1 U Res: 100 mU/Div

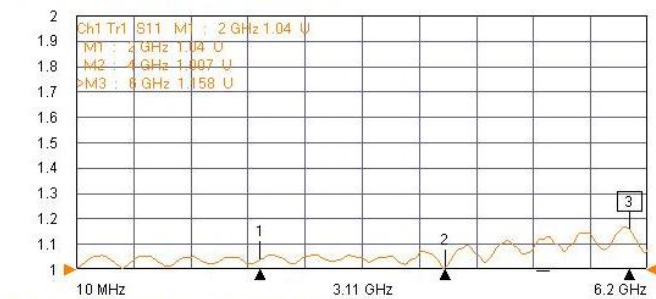


Tr3 S21 Trans LogM RefLvl: 0 dB Res: 1 dB/Div

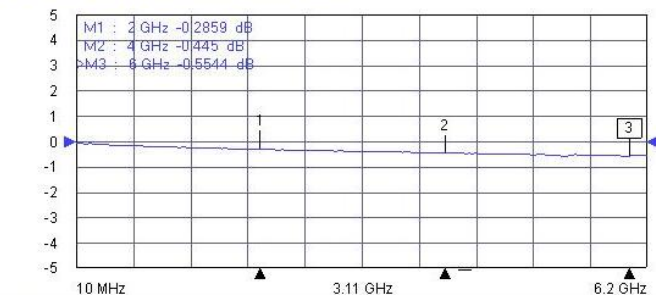

Tr2 S12 Trans LogM RefLvl: 0 dB Res: 1 dB/Div

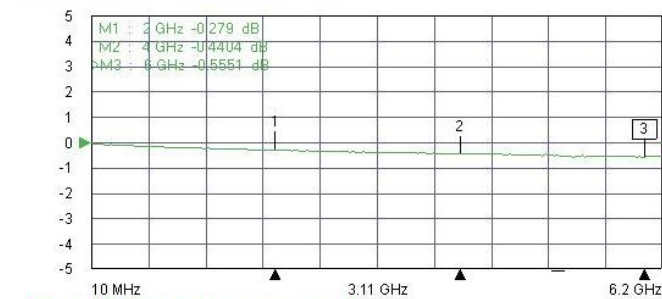


Tr4 S22 Refl SWR RefLvl: 1 U Res: 100 mU/Div

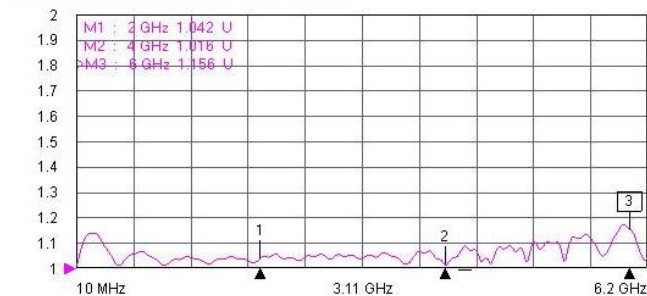


Typical Test Result

PART NUMBER	DESCRIPTION
242296.F085.10A	MMCX Male R/A To SMA Female B.H. ,Flexible 085 Blue/L:10cm/Brass Tubing

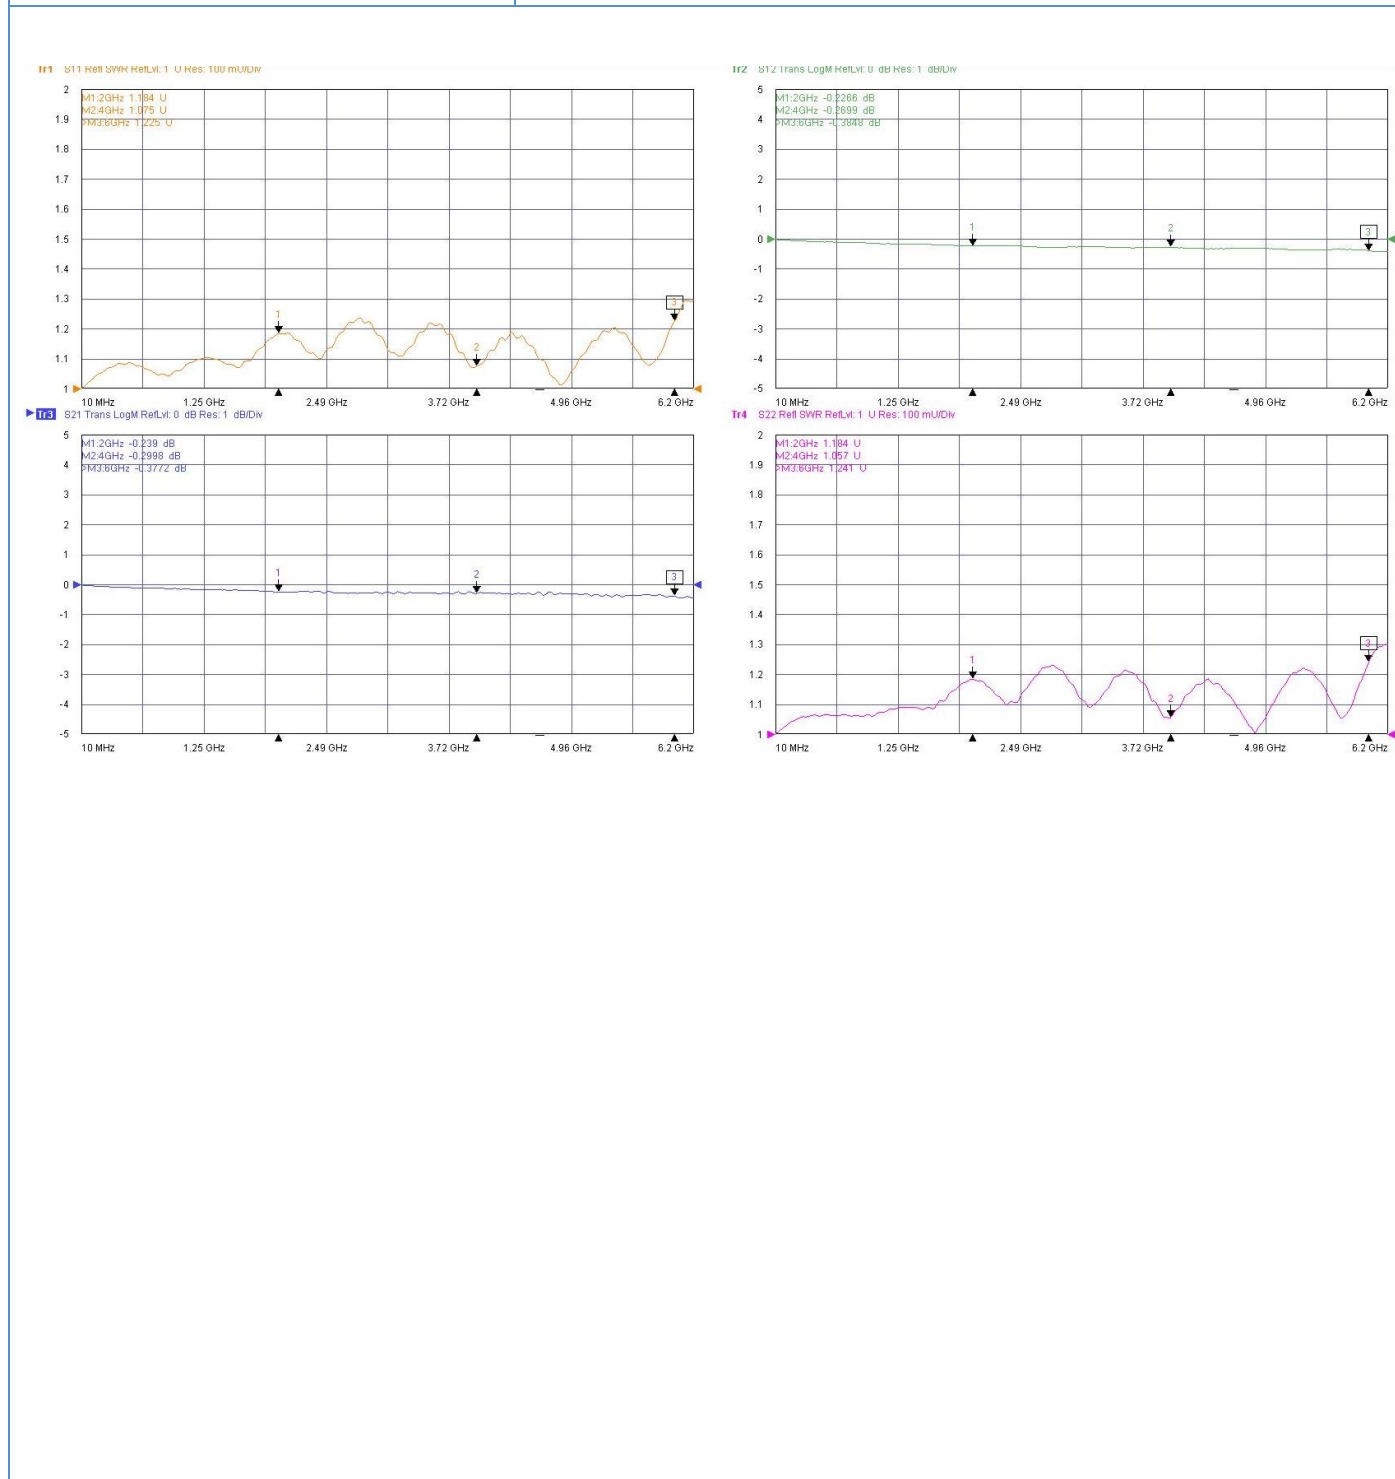


Typical Test Result

PART NUMBER	DESCRIPTION
250280.F085.30A	MMCX Female To SMA Male, Flexible 085 Blue/L:30cm/Brass Tubing

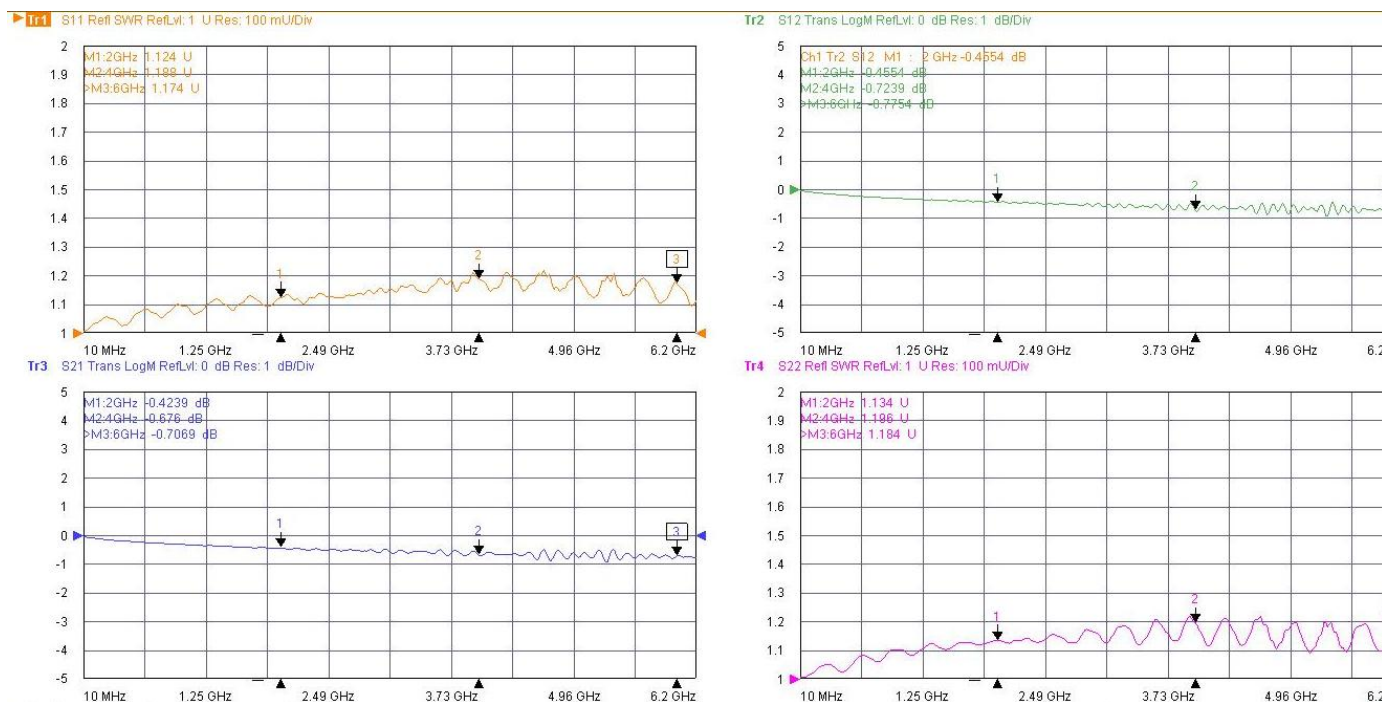

Typical Test Result


PART NUMBER	DESCRIPTION
280280.F085.50A	SMA Male To SMA Male, Flexible 085 Blue/L:50cm/Brass Tubing

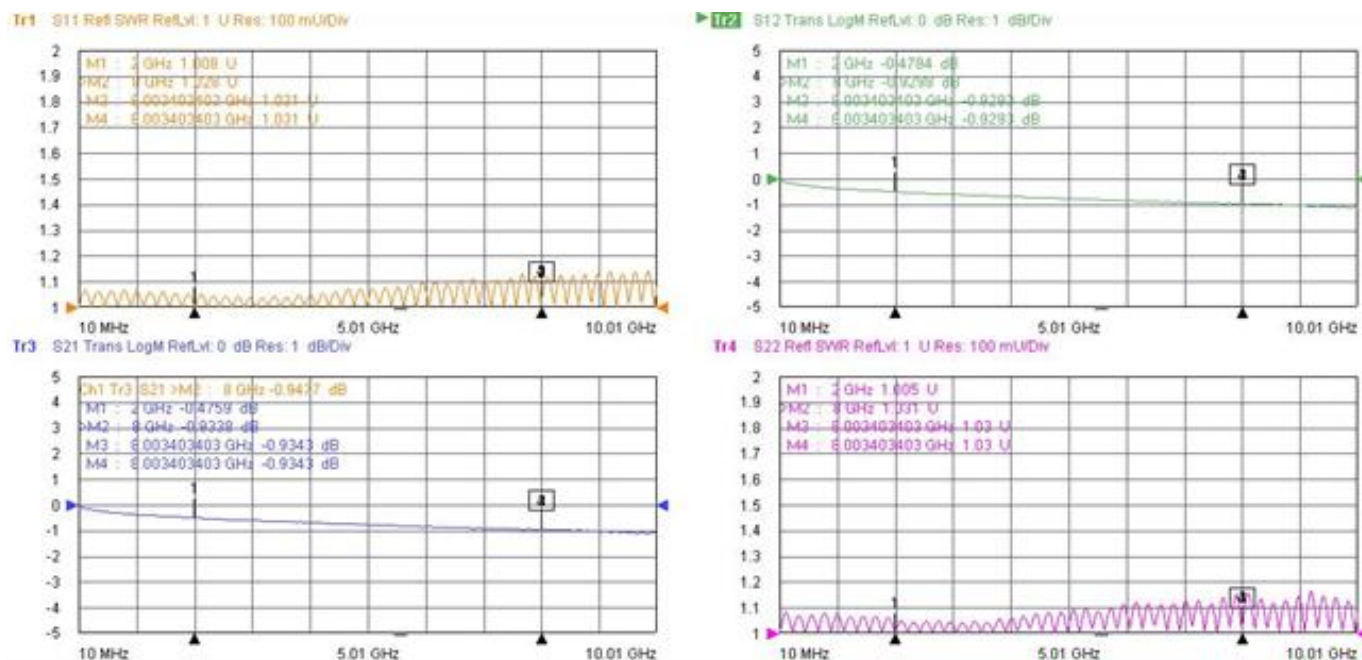

Typical Test Result

PART NUMBER	DESCRIPTION
280280.F085.60A(H3)	SMA Male/Stainless To SMA Male/Stainless, Flexible 085 Blue/L:60cm, DC-18GHz/Brass Tubing


Tr1 S11 Refl SWR RefLvl: 1 U Res: 100 mU/Div

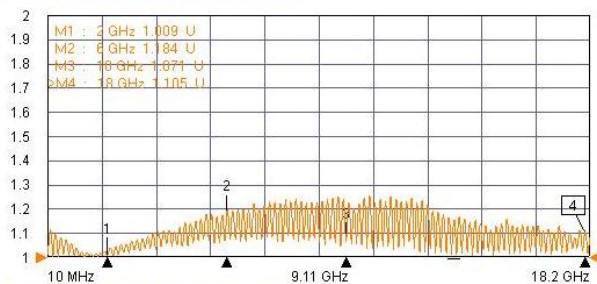


Tr2 S12 Trans LogM RefLvl: 0 dB Res: 1 dB/Div



Tr3 S21 Trans LogM RefLvl: 0 dB Res: 1 dB/Div


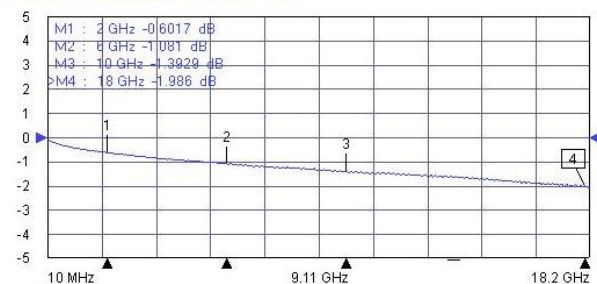


Tr4 S22 Refl SWR RefLvl: 1 U Res: 100 mU/Div

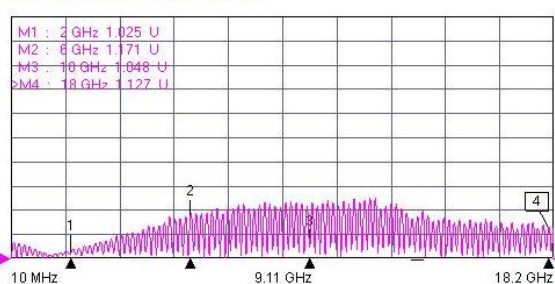

Typical Test Result


PART NUMBER	DESCRIPTION
280280.F085.30A(FC50)	SMA Male To SMA Male, Flexible 085 Blue/L:30cm(with Ferrite corex5/ Pitch: 50mm)/Brass Tubing

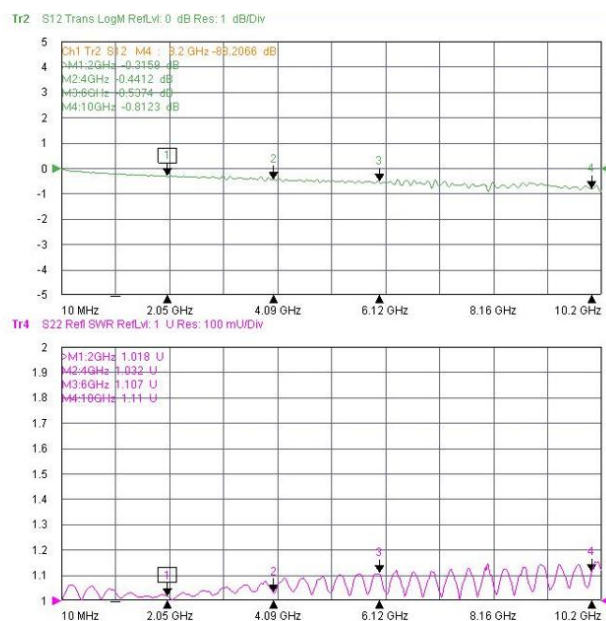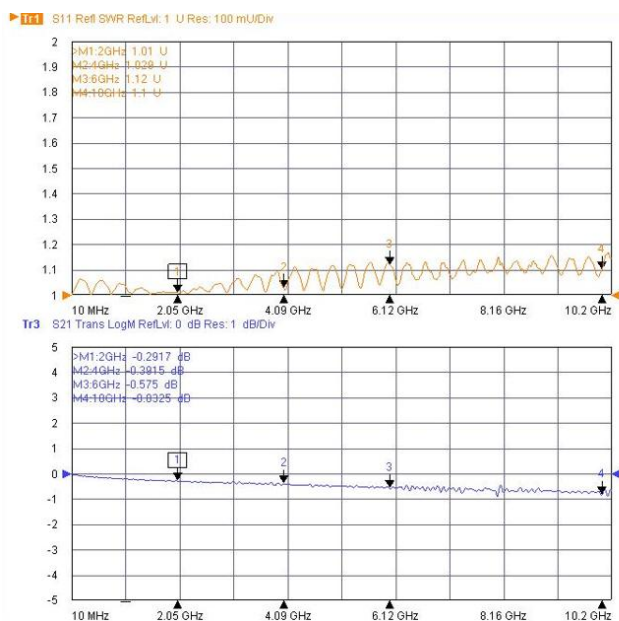


Typical Test Result

PART NUMBER	DESCRIPTION
280281.F085.40A	SMA Male To SMA Male Reverse, Flexible 085 Bule/L:40cm/Brass Tubing


Tr1 S11 Refl SWR RefLvl: 1 U Res: 100 mU/Div

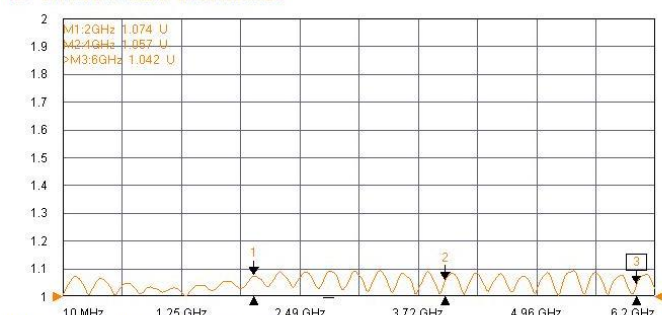


Tr2 S12 Trans LogM RefLvl: 0 dB Res: 1 dB/Div

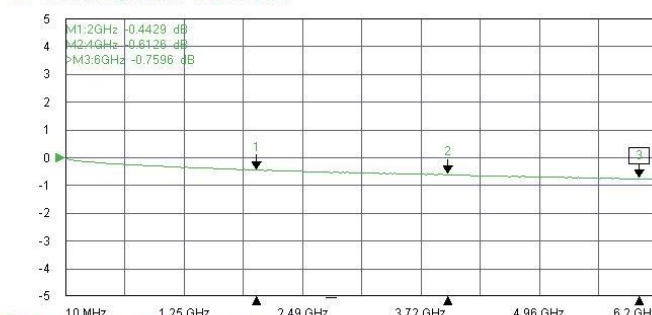

Tr3 S21 Trans LogM RefLvl: 0 dB Res: 1 dB/Div

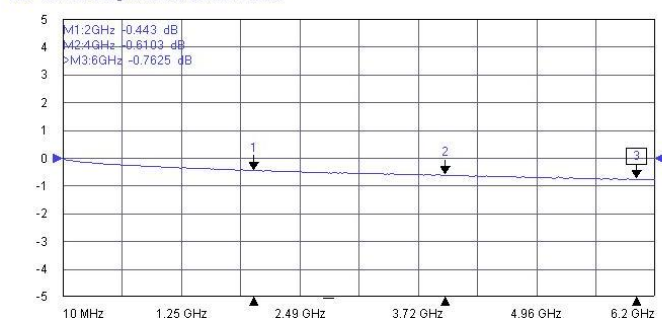


Tr4 S22 Refl SWR RefLvl: 1 U Res: 100 mU/Div

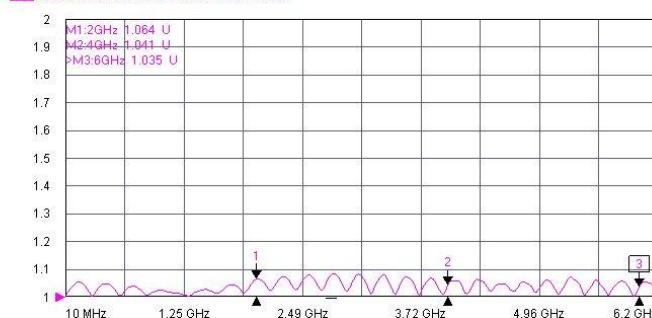


Typical Test Result

PART NUMBER	DESCRIPTION
280282.F085.30A	SMA Male To SMA Male R/A, Flexible 085 Blue/L:30cm/Brass Tubing


Tr1 S11 Refl SWR RefLvl: 1 U Res: 100 mU/Div

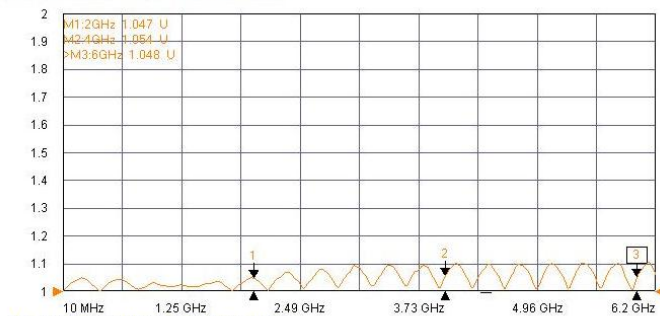


Tr2 S12 Trans LogM RefLvl: 0 dB Res: 1 dB/Div

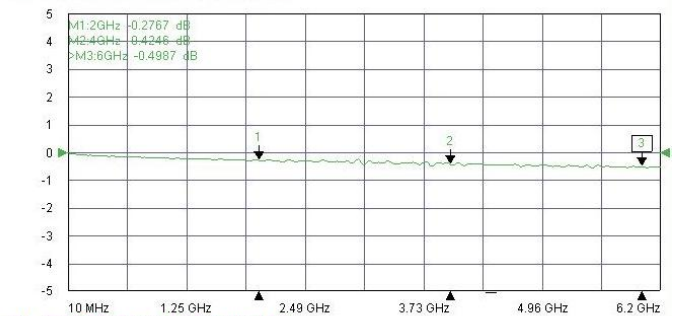

Tr3 S21 Trans LogM RefLvl: 0 dB Res: 1 dB/Div




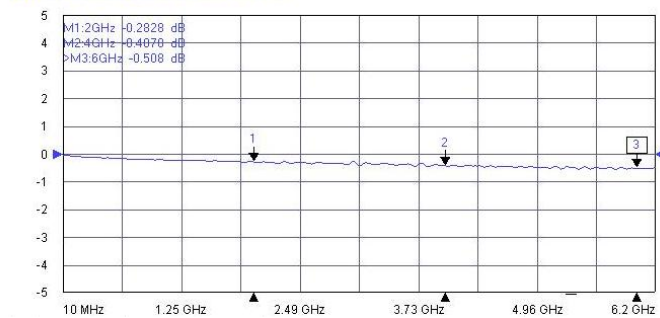


Tr4 S22 Refl SWR RefLvl: 1 U Res: 100 mU/Div

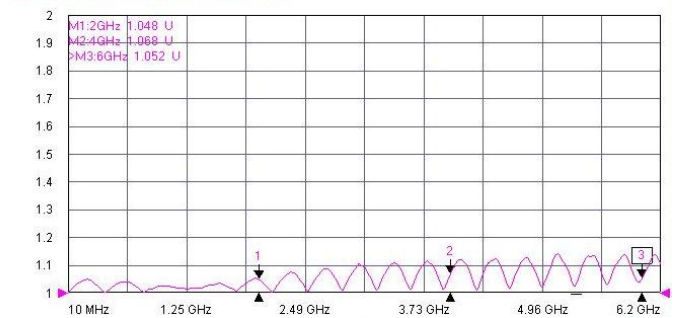

Typical Test Result


PART NUMBER	DESCRIPTION
280283.F085.150A	SMA Male To SMA Male Quick, Flexible 085 Blue/L:150cm/Brass Tubing

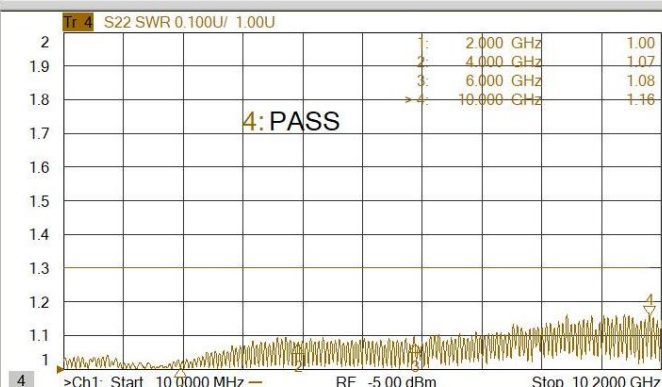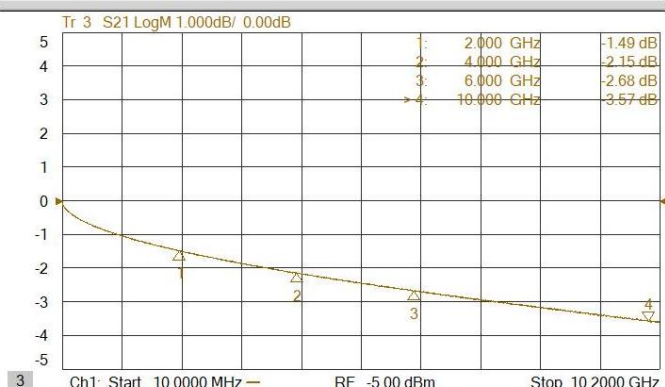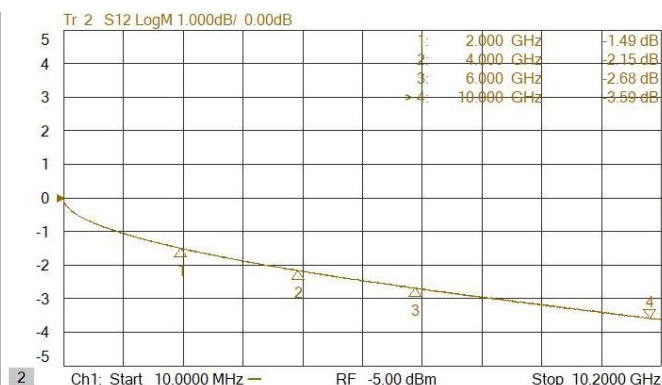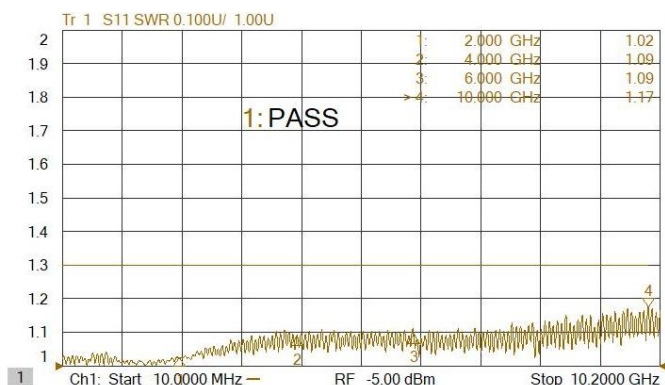


Typical Test Result

PART NUMBER	DESCRIPTION
280290.F085.40A	SMA Male To SMA Female, Flexible 085/L:40cm/ Brass Tubing


Tr1 S11 Refl SWR RefLvl: 1 U Res: 100 mV/Div

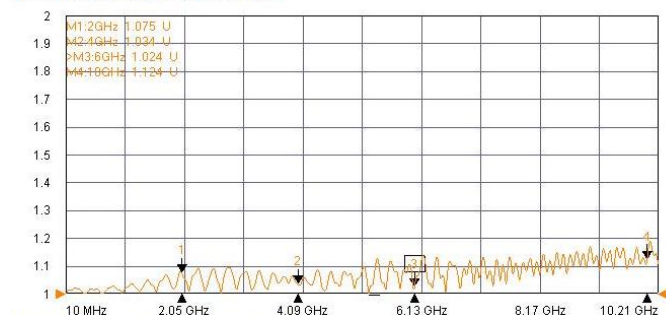


Tr2 S12 Trans LogM RefLvl: 0 dB Res: 1 dB/Div

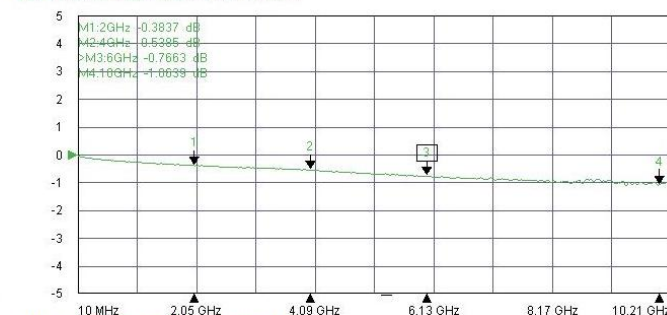

Tr3 S21 Trans LogM RefLvl: 0 dB Res: 1 dB/Div

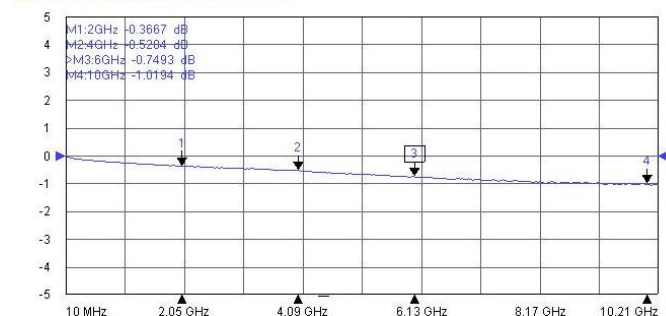


Tr4 S22 Refl SWR RefLvl: 1 U Res: 100 mV/Div

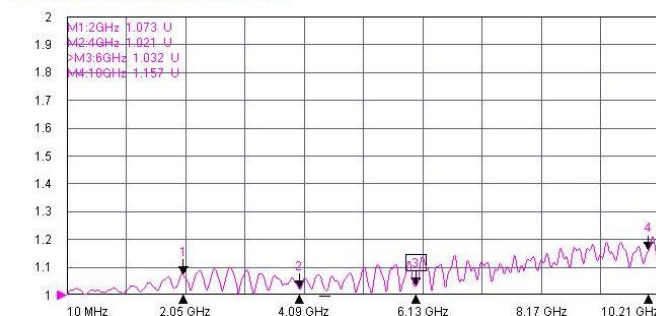

Typical Test Result


PART NUMBER	DESCRIPTION
280291.F085.200A	SMA Male To SMA Female Reverse, Flexible 085 Blue/L:200cm/Brass Tubing

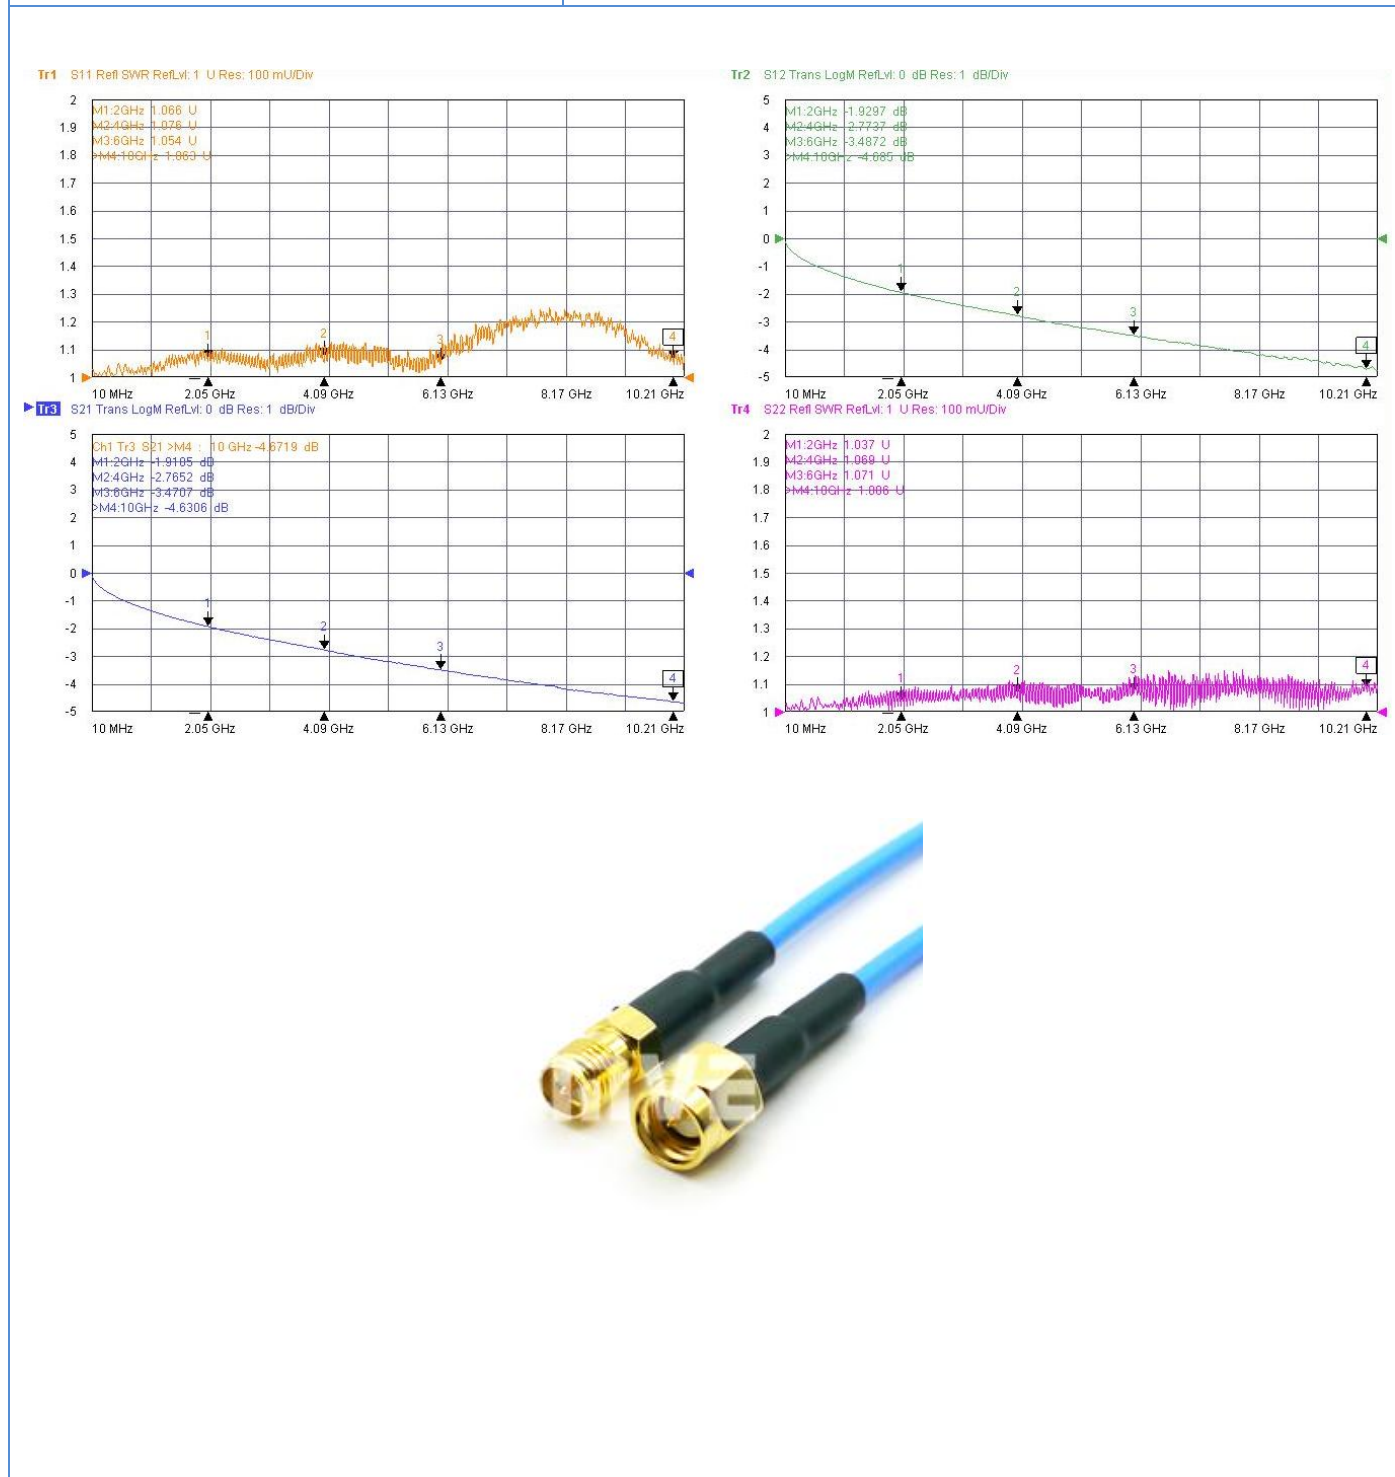


Typical Test Result

PART NUMBER	DESCRIPTION
280296.F085.200A	SMA Male To SMA Female B.H, Flexible 085 Blue/L:200cm/Brass Tubing


Tr1 S11 Refl SWR RefLvl: 1 U Res: 100 mU/Div

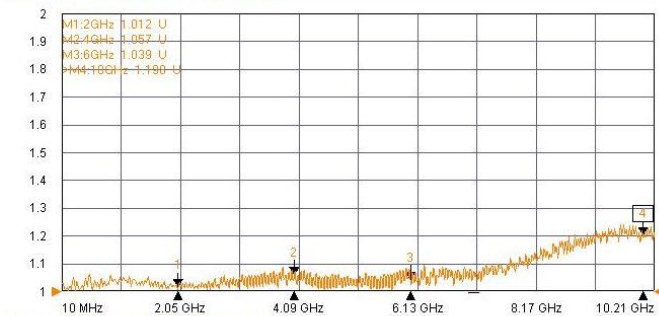


Tr3 S21 Trans LogM RefLvl: 0 dB Res: 1 dB/Div

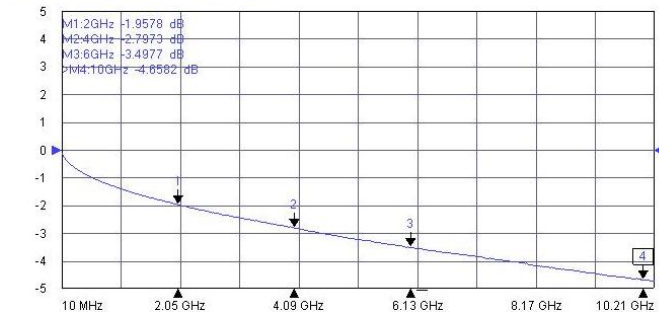

Tr2 S12 Trans LogM RefLvl: 0 dB Res: 1 dB/Div

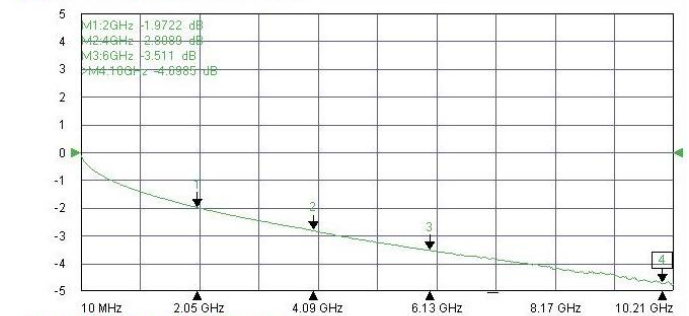


Tr4 S22 Refl SWR RefLvl: 1 U Res: 100 mU/Div

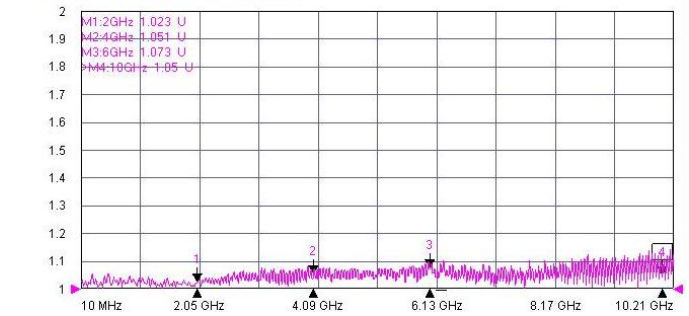


Typical Test Result

PART NUMBER	DESCRIPTION
282282.F085.20A	SMA Male R/A To SMA Male R/A, Flexible 085 Blue/L:20cm/Brass Tubing


Tr1 S11 Refl SWR RefLvl: 1 U Res: 100 mV/Div

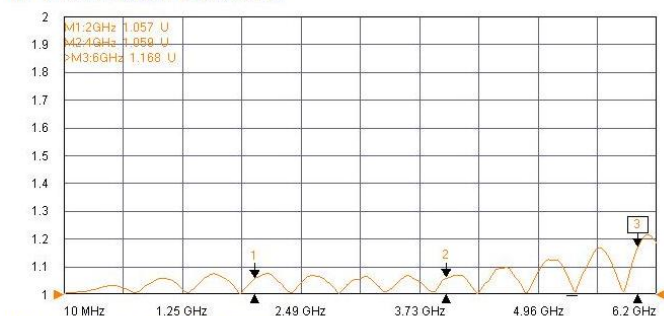


Tr3 S21 Trans LogM RefLvl: 0 dB Res: 1 dB/Div

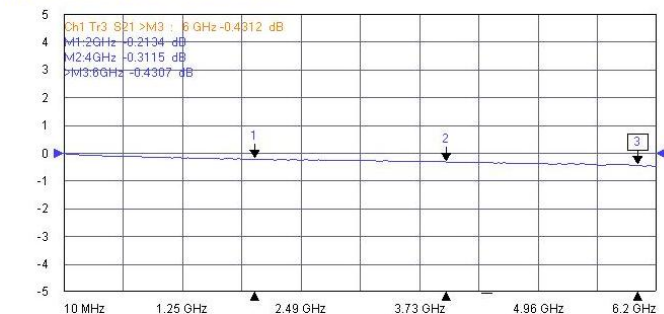

Tr2 S12 Trans LogM RefLvl: 0 dB Res: 1 dB/Div

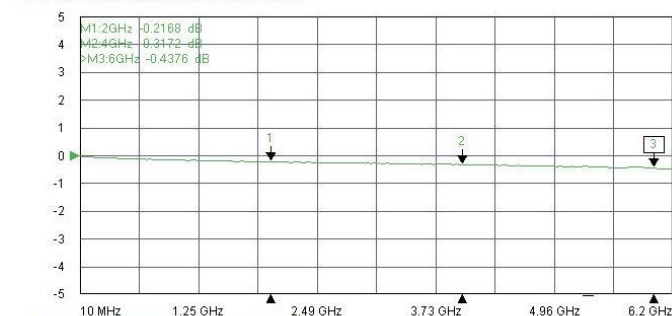


Tr4 S22 Refl SWR RefLvl: 1 U Res: 100 mV/Div

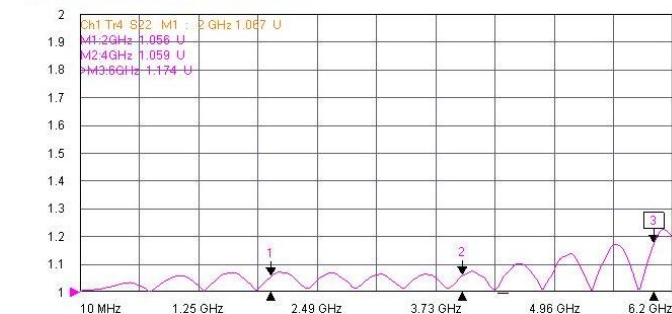


Typical Test Result

PART NUMBER	DESCRIPTION
282290.F085.30A	SMA Male R/A To SMA Female, Flexible 085/L:30cm/ Brass Tubing


Tr1 S11 Refl SWR RefLvl: 1 U Res: 100 mU/Div

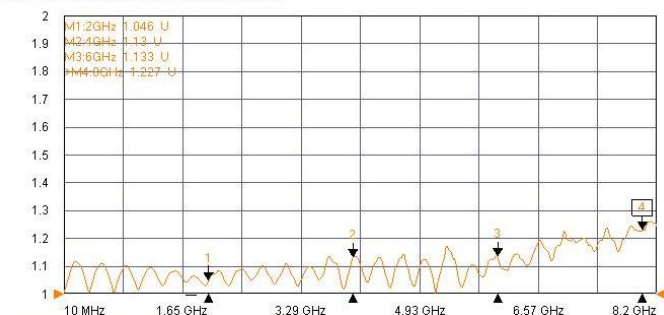


Tr2 S12 Trans LogM RefLvl: -1 dB Res: 1 dB/Div

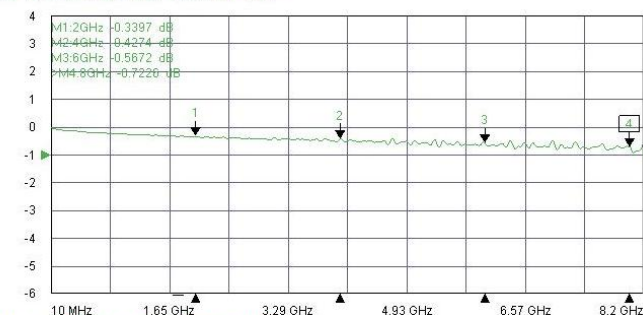

Tr3 S21 Trans LogM RefLvl: -1 dB Res: 1 dB/Div

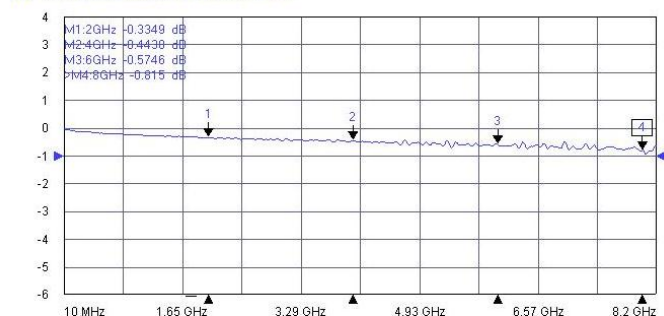


Tr4 S22 Refl SWR RefLvl: 1 U Res: 100 mU/Div

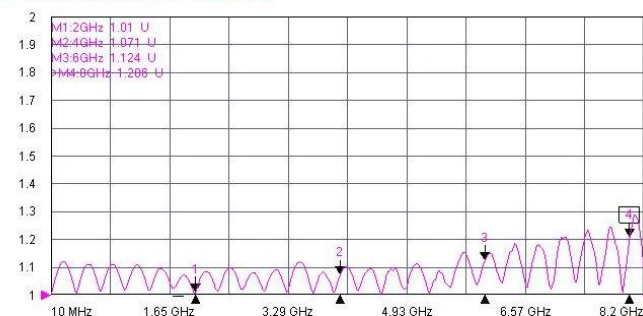


Typical Test Result

PART NUMBER	DESCRIPTION
342280.F085.30A	MHF1 To SMA Male, Flexible 085 Blue/L:30cm/Brass Tubing


Tr1 S11 Refl SWR RefLvl: 1 U Res: 100 mU/Div

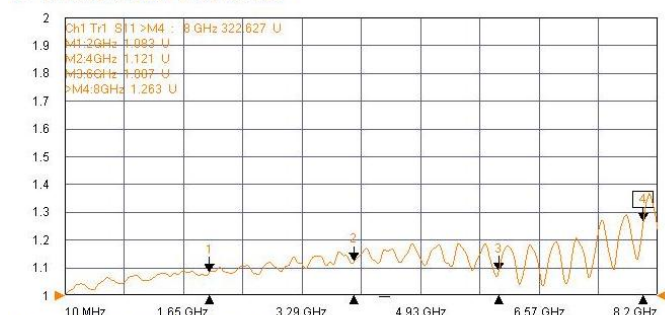


Tr3 S21 Trans LogM RefLvl: 0 dB Res: 1 dB/Div

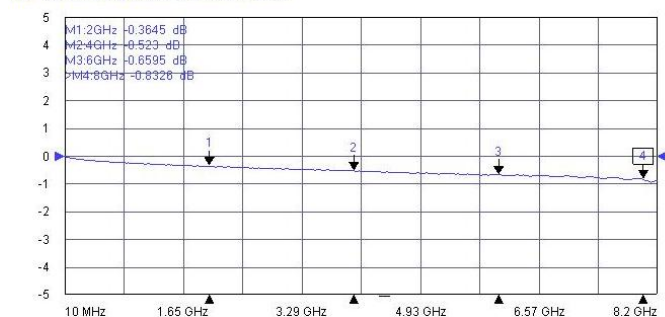

Tr2 S12 Trans LogM RefLvl: 0 dB Res: 1 dB/Div

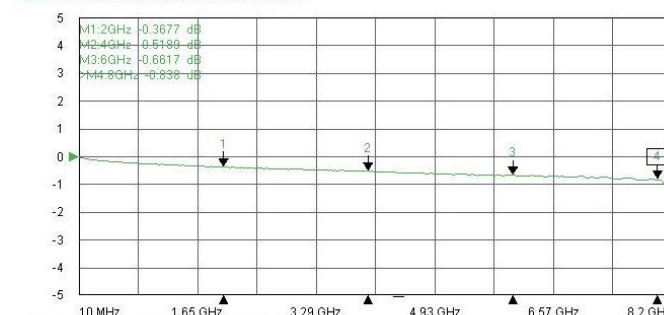


Tr4 S22 Refl SWR RefLvl: 1 U Res: 100 mU/Div

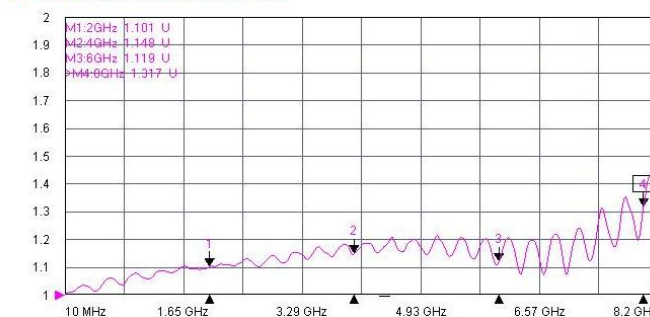


Typical Test Result

PART NUMBER	DESCRIPTION
342296.F085.15A	MHF1 To SMA Female B.H, Flexible 085 Blue/L:15cm/Brass Tubing


Tr1 S11 Refl SWR RefLvl: 1 U Res: 100 mU/Div

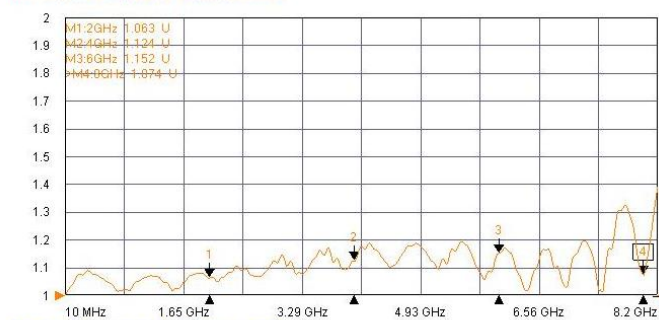


Tr3 S21 Trans LogM RefLvl: 0 dB Res: 1 dB/Div

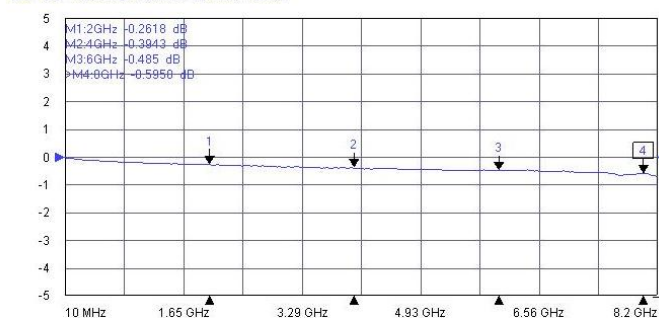

Tr2 S12 Trans LogM RefLvl: 0 dB Res: 1 dB/Div

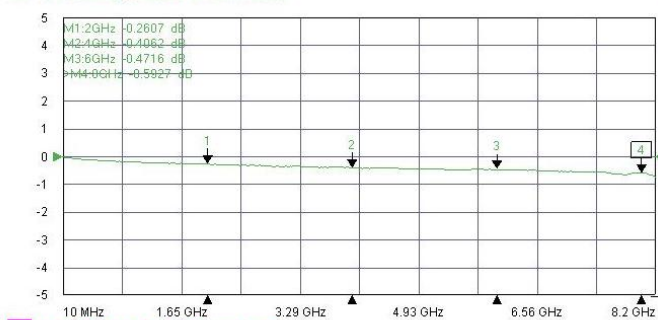


Tr4 S22 Refl SWR RefLvl: 1 U Res: 100 mU/Div

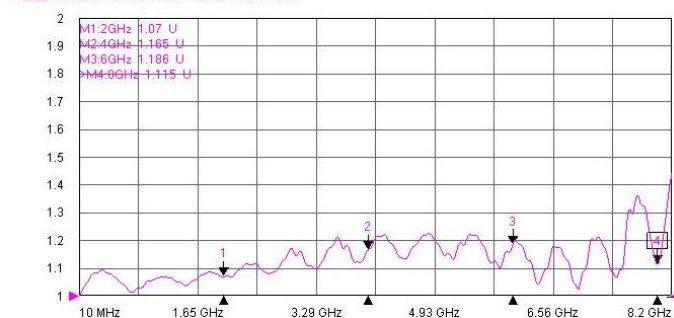


Typical Test Result

PART NUMBER	DESCRIPTION
480280.F085.100A(H)	SMP Female To SMA Male/Stainless, Flexible 085 Blue/ L:100cm/Brass Tubing


Tr1 S11 Refl SWR RefLvl: 1 U Res: 100 mU/Div

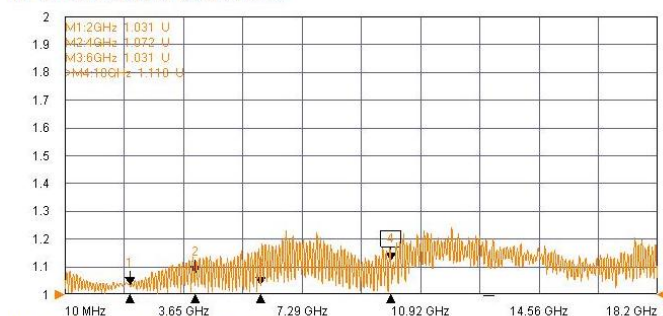


Tr3 S21 Trans LogM RefLvl: 0 dB Res: 1 dB/Div

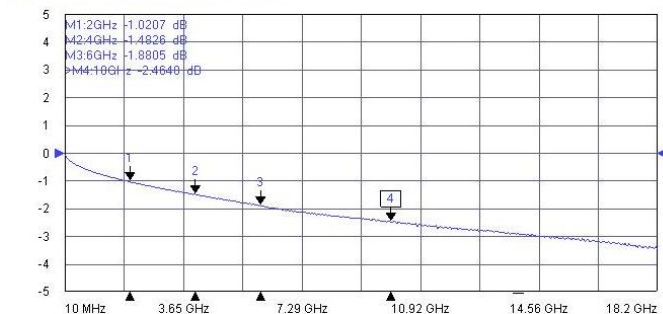

Tr2 S12 Trans LogM RefLvl: 0 dB Res: 1 dB/Div

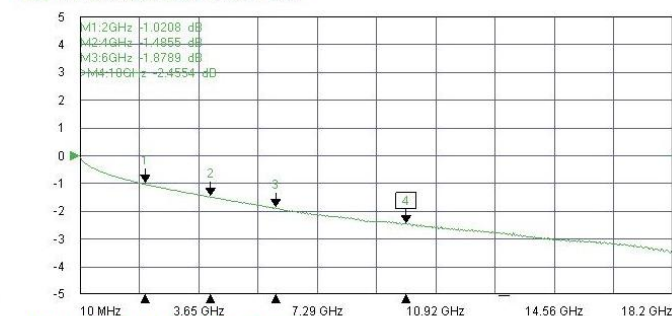


Tr4 S22 Refl SWR RefLvl: 1 U Res: 100 mU/Div

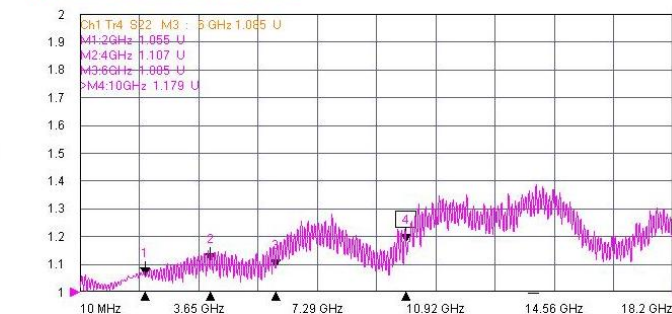

Typical Test Result


PART NUMBER	DESCRIPTION
480280.F085.30A(H3)	SMP Female To SMA Male/Stainless, Flexible 085 Blue/ L:30cm/Brass Tubing

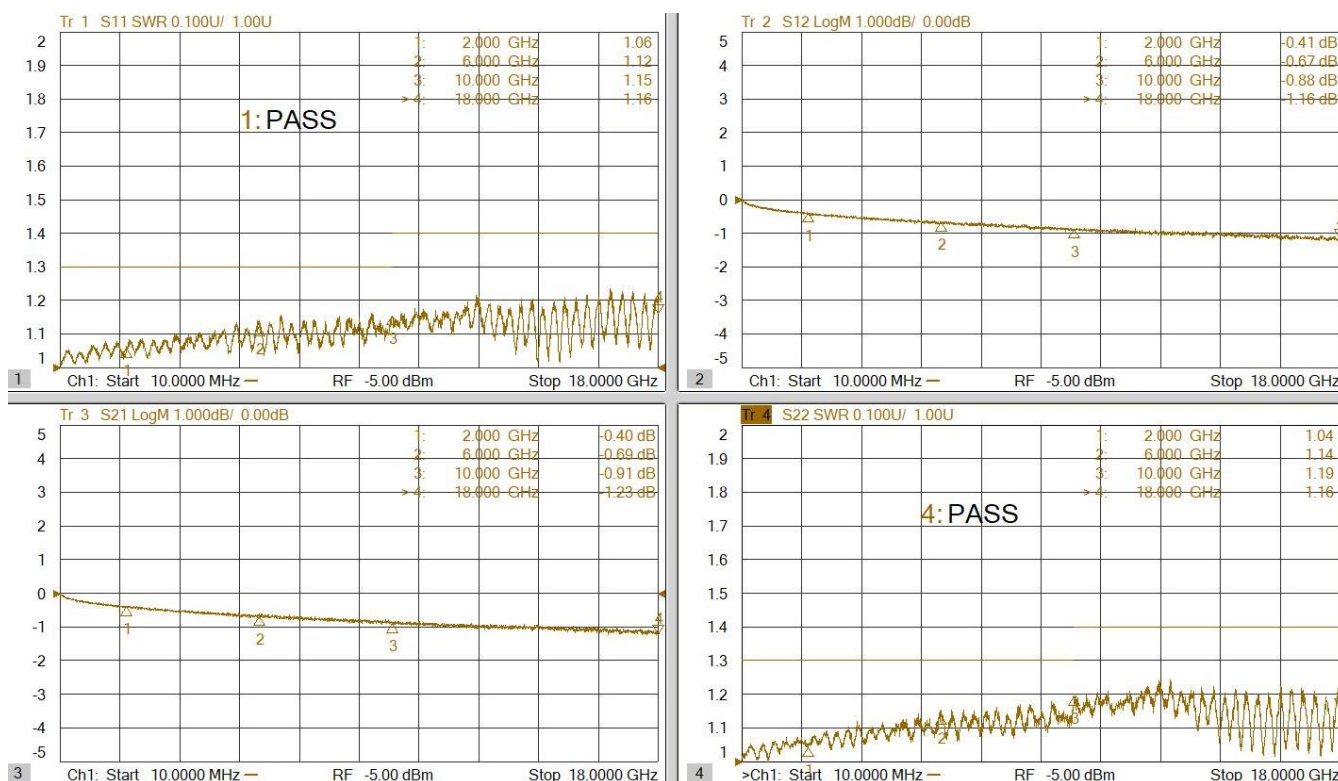


Typical Test Result

PART NUMBER	DESCRIPTION
480290.F085.10A(H3)	SMP Female To SMA Female, Flexible 085 Blue/ L:10cm/Brass Tubing


Tr1 S11 Refl SWR RefLvl: 1 U Res: 100 mU/Div

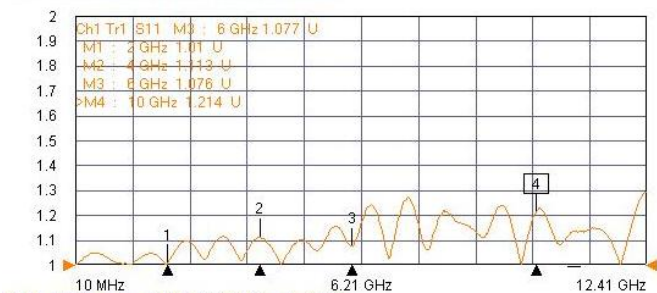


Tr2 S12 Trans LogM RefLvl: 0 dB Res: 1 dB/Div

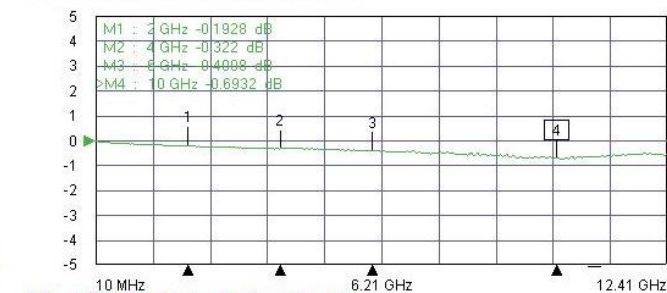

Tr3 S21 Trans LogM RefLvl: 0 dB Res: 1 dB/Div

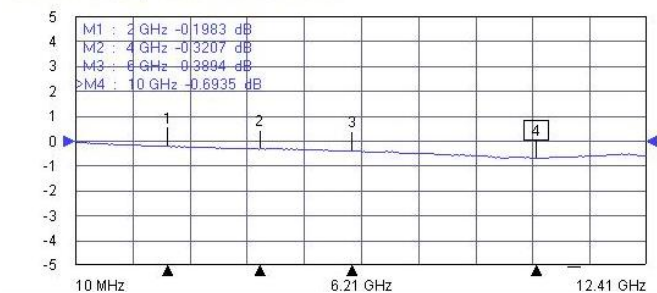


Tr4 S22 Refl SWR RefLvl: 1 U Res: 100 mU/Div

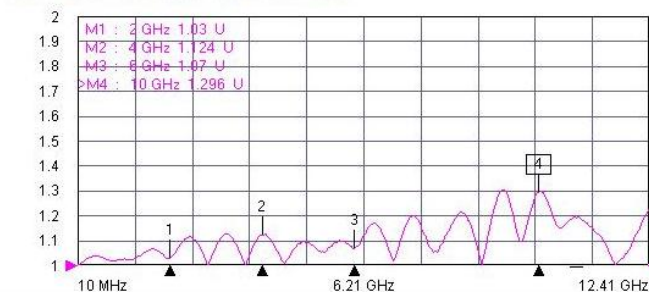


Typical Test Result

PART NUMBER	DESCRIPTION
482482.F085.15A	SMP Female R/A To SMP Female R/A, Flexible 085 Blue/ L:15cm/Brass Tubing


Tr1 S11 Refl SWR RefLvl: 1 U Res: 100 mU/Div

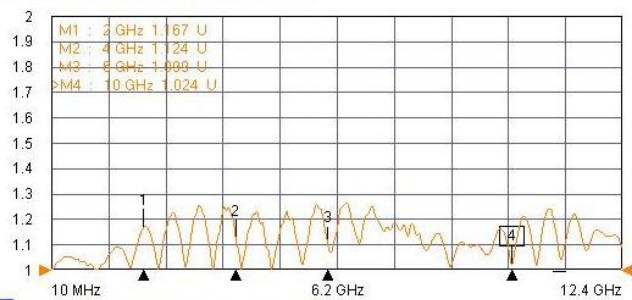

Tr2 S12 Trans LogM RefLvl: 0 dB Res: 1 dB/Div

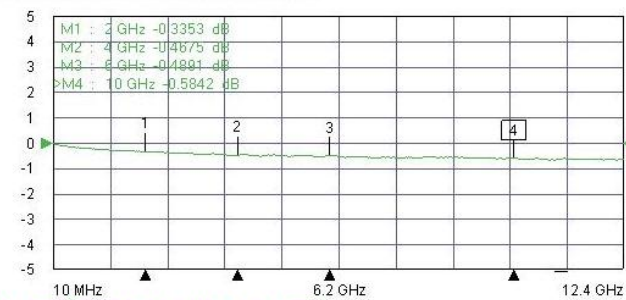

Tr3 S21 Trans LogM RefLvl: 0 dB Res: 1 dB/Div

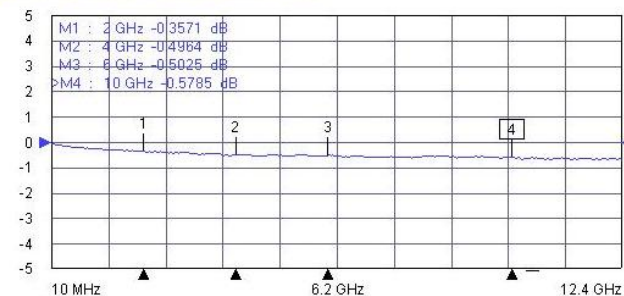

Tr4 S22 Refl SWR RefLvl: 1 U Res: 100 mU/Div

