

COAXIAL CONNECTOR

SMA END LAUNCH FOR PCB TYPE

Features

- ✓ Frequency Range: DC to 12.4 GHz
- ✓ High performance design
- ✓ High interface performance






Specifications

PART NUMBER	MVE3701-1.73H
DESCRIPTION	SMA Female S/T End Launch For PCB Connector/1.73mm, DC-12.4GHz
ELECTRICAL	MATERIALS
FREQUENCY: DC-12.4GHz IMPEDANCE: 50 OHM WORKING VOLTAGE: 500Vrms MAX. DIELECTRIC WITHSTANDING VOLTAGE: 1000Vrms MAX. INSULATOR RESISTANCE: 5000 MEGOHMS MIN.	BODY: BRASS, GOLD PLATED CONTACT: BE COPPER, GOLD PLATED INSULATOR: TEFLON

TOLERANCE: X=±0.20 X.X=±0.10 X.XX=±0.05

Outline Drawing (Unit: mm)

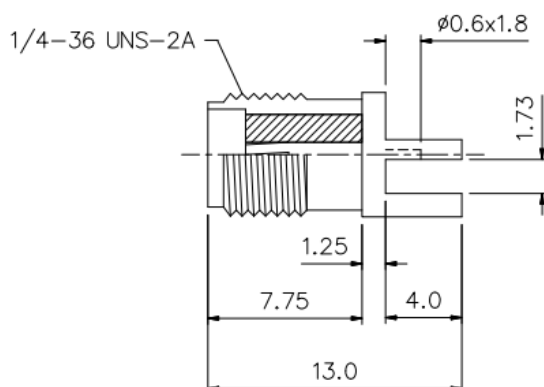

RECOMMENDED FEET PRINT

NOTES:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

