

COAXIAL ADAPTER

BNC-SMA Standard Series

Features

- ✓ Frequency up to 4 GHz
- ✓ High Durability
- ✓ Low VSWR


Specifications




PART NUMBER	MVE1566H
DESCRIPTION	BNC Male To SMA Female, DC-4GHz Adapter
ELECTRICAL	MATERIALS
FREQUENCY: DC-4GHz IMPEDANCE: 50OHM VSWR: 1.25:1 MAX. INSULATION RESISTANCE: ≥ 5000 MEGAOHM WITHSTANDING VOLTAGE: 1000V TEMPERATURE RANGE: -65°C ~ $+165^{\circ}\text{C}$ DURABILITY: 500CYCLE MIN. INSERTION LOSS: 0.25dB	BODY: BRASS, NICKEL -PLATED PIN CONTACT: PHOSPHOR BRONZE, GOLD-PLATED COULPING NUT: BRASS, NICKEL-PLATED INSULATOR: PTFE GASKET: SILICONE RUBBER

Tolerance: $\pm 0.5\text{mm}$

Outline Drawing (Unit: mm)

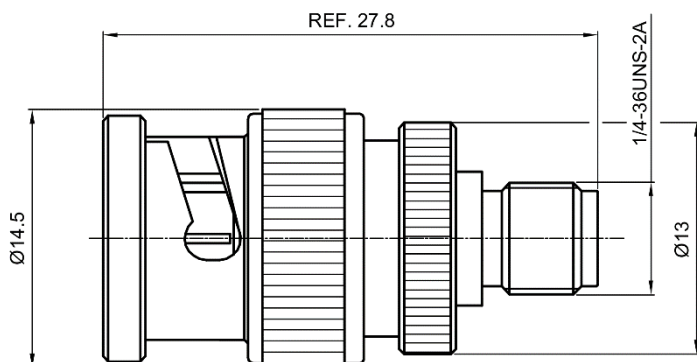

Typical Test Result

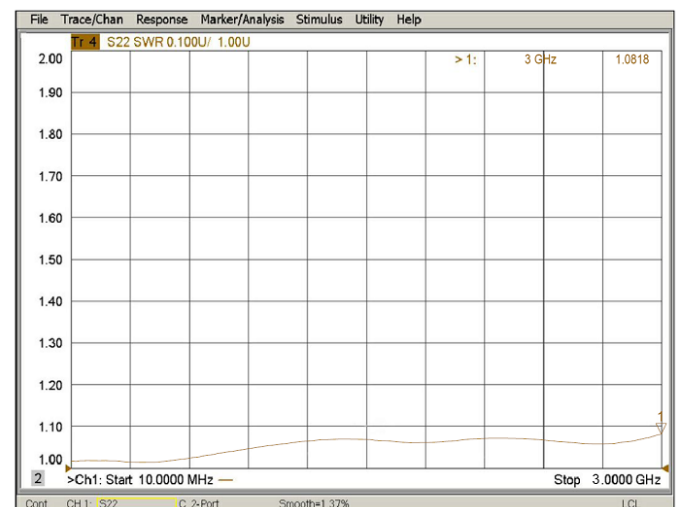

NOTES:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

