

COAXIAL ADAPTER

Fakra-SMA Standard Series

Features

- ✓ Farka interface
- ✓ Frequency up to 6 GHz
- ✓ Low VSWR




Specifications

PART NUMBER	MVE1768
DESCRIPTION	Fakra Male To SMA Male Adapter, DC-6GHz
ELECTRICAL	MATERIALS
FREQUENCY: DC-4GHz IMPEDANCE: 50Ω VSWR: 1.2:1 MAX.@6GHz DIELECTRIC WITHSTANDING VOLTAGE:750Vrms INSULATION RESISTANCE:1000Mega-Ohms CENTER CONTACT RESISTANCE: 8.0 mini Ohms OUTER CONTACT RESISTANCE:6.0mini Ohms TEMPERATURE RANGE: -40°C~85°C	BODY: BRASS,GOLD PLATED CONDUCTOR: BRASS, GOLD PLATED INSULATION:TEFLON O RING: SILCON C-RING: SUS304 HOUSING: NYLON,Z CODE(WATER BLUE)
	MECHANICAL
	COUPLING METHOD: SNAP-ON DURABILITY: 100CYCLE MIN. ENGAGEMENT FORCE:25N MAX. DISENGAGEMENT FORCE:2N MIN.

Tolerance: X= ± 0.25 .X= ± 0.15 .XX= ± 0.08

Outline Drawing (Unit: mm)

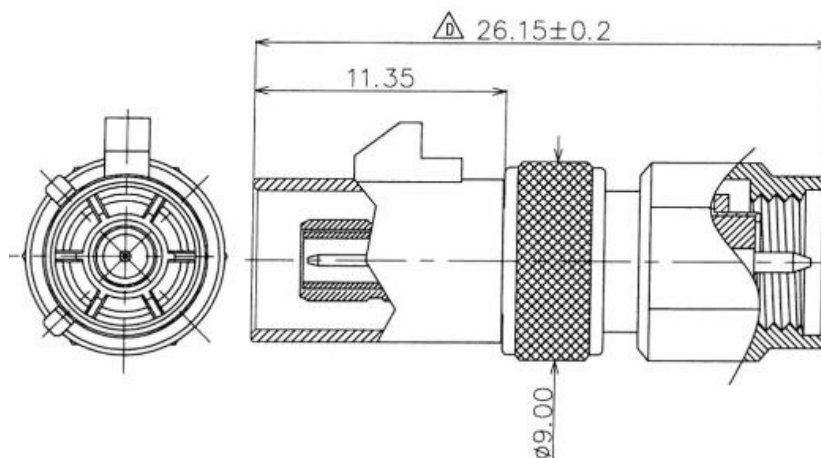

NOTES:
1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

