

ELECTRICAL DATA

FREQUENCY: DC-6GHz

IMPEDANCE: 50Ω

VSWR: 1.50:1@DC-6GHz

INSULATION RESISTANCE: 1000Mega-ohms


DIELECTRIC WITHSTANDING: 500Vrms

MECHANICAL DATA


COUPLING METHOD: SNAP-ON

DURABILITY(MATING/UNMATING): 8K CYCLES

ROHS COMPLIANCE

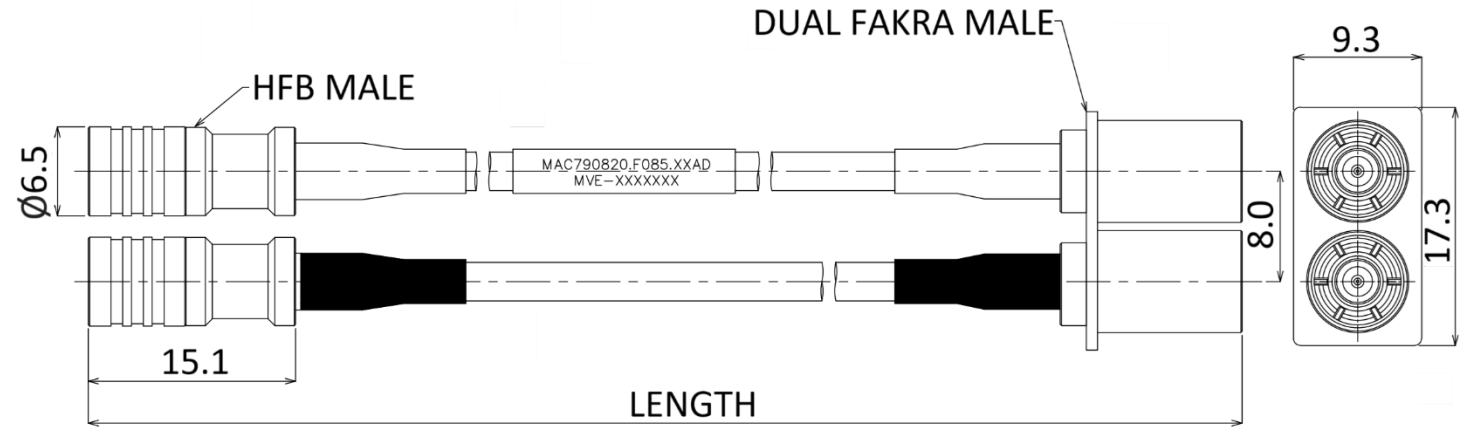

LENGTH	P/N
30cm±1cm	MAC790820.F085.30AD

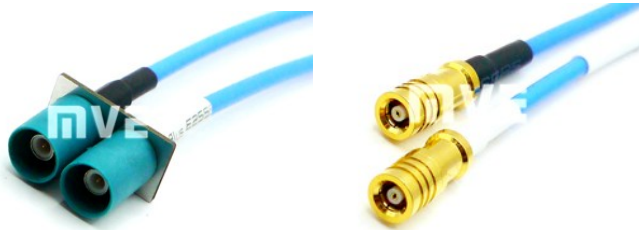

DESCRIPTION	MATERIALS	ROHS COMPLIANCE	UNIT: mm
BODY	BRASS ,NICKEL/GOLD PLATED	TOLERANCE: X=±0.38 X.X=±0.25 X.XX=±0.15	
CONTACT PIN	BRASS, GOLD PLATED	TITLE DUAL HFB Male To DUAL FAKRA Male(2 in 1) , DC-6GHz,Flexible 085 Blue / L:XXcm / VSWR<1.5	
INSULATOR	TEFLON		



芝程科技有限公司

www.micro-mve.com

DC-67GHz RF& Microwave Components

PART NO.	MAC790820.F085.XXAD	REV 1.1
SIZE: A	SHEET: 1/1	SCALE:

NOTES

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY