


STANDARD COAXIAL CABLE ASSEMBLIES

MVE standard coaxial cable can provide not only inexpensive cost but also a lot of variety models to meet your needs. The overall diameter of flexible series is including, 2.59mm(RG316) , 2.93mm(RG316 Double Shielding), 0.085inch(F085/SS405), 0.141inch(F141/SS402); Semi-flex series are including: 0.085 inch(SF085/RG405), 0.141inch(SF141/RG402); Semi-rigid series are including: 0.034inch(SR034), 0.047 inch(SR047);0.085 inch(SR085); 0.141inch (SR141). In the meantime, MVE can offer customized services and support the optimization of cable assembly. With MVE service, customize product to let user easy to install. MVE is aimed to provide a wide range of performance coaxial cable for various demands.

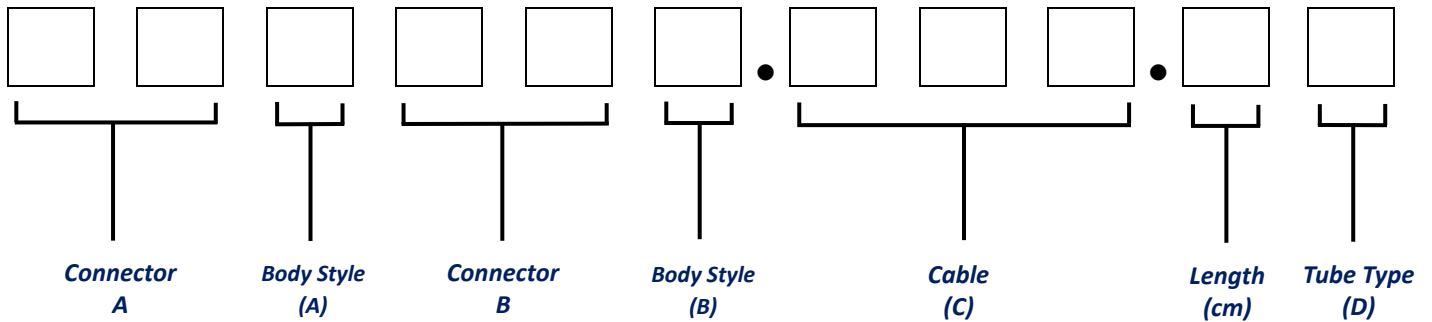

No	Conn. A/B
10	1.85mm-M
11	1.85mm-F
12	2.4mm-M
13	2.4mm-F
14	2.9mm-M
15	2.9mm-F
16	3.5mm-M
17	3.5mm-F
18	APC7-M
19	APC7-F
20	BNC-M
21	BNC-F
22	MCX-M
23	MCX-F
24	MMCX-M
25	MMCX-F
26	N-M
27	N-F
28	SMA-M
29	SMA-F
30	SSMA-M
31	SSMA-F
32	TNC-M
33	TNC-F
34	MHF202781-M

No	Conn. A/B
35	75ΩBNC-M
36	75ΩBNC -F
37	MHF20311-M
38	75ΩF-M
39	75ΩF-F
40	MHF20367-M
41	MHF20448-M
42	75ΩN-M
43	75ΩN-F
44	75ΩSMB-M
45	75ΩSMB-F
46	MS147-M
47	MM8430-M
48	SMP-F
49	MHF20428-M
50	SMB-F
51	SMB-M
52	UHF-F
53	UHF-M
54	Fakra SMB-M
55	Fakra SMB-F
56	MM8030-M
57	7/16DIN-M
58	MS180-M
59	MS162-M

No	Conn. A/B
60	CRC9-M
61	MS162-M
62	SSMCX-M
63	SMPM-M
64	FAKRA-M
65	TS9A-M
66	MS156C-M
67	MHF20567-M
68	MS156-M
69	MM8930-M
No	Body Style
0	Standard
1	Reverse
2	Right angle
3	Quick
4	RP-Right angle
5	RP-Quick
6	Bulkhead
7	Opposite Direction R/A
8	2Hole Flange
9	RP-Bulkhead
A	Quick/No hex
B	4Hole Flange

No	Coaxial Cables ©
6	RG-6(U)
58	RG58(U)
59	RG59
081	Mini-coaxial 0.81mm
113	Mini-coaxial 1.13mm
137	Mini-coaxial 1.37mm
142	RG-142
174	RG-174
178	RG-178
214	RG-214
316	RG-316
316D	RG-316 Doubt Shield
400	RG-400
F085	SS405
F141	SS402
SF085	RG405
SF141	RG402
SF085JB	RG405(Blue Jacket)
SF141JB	RG402(Blue Jacket)
SPF085	SFL405
SPF141	SFL402
SR034	Semi-rigid 034
SR047	Semi-rigid 047
SR085	Semi-rigid RG405
SR141	Semi-rigid RG402
200LL	200LL,LMR200
400LL	400L,CFD400,LMR400
600LL	600LL,LMR600
2CS	AWG28 x2C
3CS	AWG28 x3C

Code(D)	A	B	C
Tube Type	Brass Tubing	Double Heat-shrink Tubing	Rigid Glued Tubing


COAXIAL CABLE

MCBL-F141.50

Features

- ✓ Frequency up to 18GHz
- ✓ Excellent shielding effect greater than 100dB
- ✓ Fully flexible for ease of installation
- ✓ Meet to Standard Mil-C-17

MULTI-FLEXIBLE(SS402)

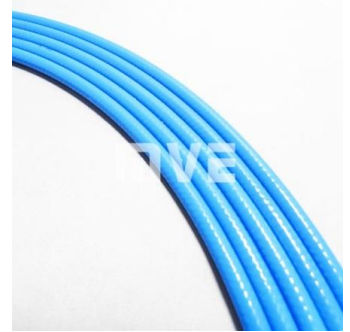

Specifications

CONSTRUCTION		
ITEM	MATERIAL	DIAMETER
CENTER CONDUCTOR	Silver Plated Copper clad steel Wire	0.925 mm (±0.015mm)
DIELECTRIC	PEFE	2.97 mm (±0.03mm)
INNER SHIELD	SPCS	3.20mm (±0.05mm)
OUTER SHIELD	SPC	3.58 mm (±0.05mm)
JACKET	FEP(Blue)	4.15 mm (±1.0mm)
ELECTRICAL DATA		
ITEM	SPECIFICATION	
CUT-OFF FREQUENCY	18 GHz	
IMPEDANCE	50 Ohms	
CAPACITANCE	96 pF/m	
OPERATING TEMPERATURE	-55°C ~ +180°C	
SHIELDING EFFECT	>-100 dB	
VELOCITY OF PROPAGATION	69.5 %	
WORKING VOLTAGE	1,900 Vrms(MAX.)	
MIN. BENDING RADIUS	20 mm (SINGLE)	
WEIGHT	42kg/Km	
MAXIMUM ATTENUATION		
FREQUENCY	ATTENUATION dB/M	ATTENUATION dB/ft
1 GHz	0.43	0.131
3 GHz	0.75	0.229
5 GHz	0.98	0.299
10 GHz	1.48	0.448
15 GHz	1.87	0.570
18 GHz	2.16	0.640



NOTES:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

Cable Assembly Part Number

MVE PART NUMBER	CONNECTOR 1	CONNECTOR 2	XX- LENGTH (cm)	FREQUENCY (GHz)	VSWR
260260.F141.XX	N Male S/T	N Male S/T	60, 100, 150, 200, 300	6.0	1.35
260260.F141.XX(H3)	N Male S/T	N Male S/T	60, 100, 150, 200, 300	10.0	1.40
260276.F141.XX	N Male S/T	N Female BH S/T	60, 100, 120, 150, 200	6.0	1.35
260280.F141.XX	N Male S/T	SMA Male S/T	60, 100, 150, 200, 300	6.0	1.30
260280.F141.XX(H3)	N Male S/T	SMA Male S/T	60, 100, 150, 200, 300	10.0	1.40
276280.F141.XX	N Female BH S/T	SMA Male S/T	60, 100, 120, 150, 200	6.0	1.40
276280.F141.XX(H3)	N Female BH S/T	SMA Male S/T	60, 100, 120, 150, 200	10.0	1.40
280280.F141.XX	SMA Male S/T	SMA Male S/T	60, 100, 120, 150, 200	10.0	1.30
280280.F141.XX(H3)	SMA Male S/T	SMA Male S/T	60, 100, 120, 150, 200	18.0	1.40
280280.F141.XX(H)	SMA Male S/T	SMA Male S/T	60, 100, 120, 150, 200	18.0	1.35
280281.F141.XX	SMA Male S/T	SMA Male (RP) S/T	60, 100, 120, 150, 200	10.0	1.30
280281.F141.XX(H3)	SMA Male S/T	SMA Male (RP) S/T	60, 100, 120, 150, 200	18.0	1.40
280282.F141.XX	SMA Male S/T	SMA Male R/A	60, 100, 120, 150, 200	6.0	1.30
280290.F141.XX	SMA Male S/T	SMA Female S/T	60, 100, 120, 150, 200	10.0	1.30
280290.F141.XX(H3)	SMA Male S/T	SMA Female S/T	60, 100, 120, 150, 200	18.0	1.40
281291.F141.XX	SMA MALE(RP) S/T	SMA Female (RP) S/T	60, 100, 120, 200, 300	10.0	1.30
281299R.F141.XX	SMA MALE(RP) S/T	SMA Female B.H (RP) S/T	60, 100, 120, 200, 300	6.0	1.30
282282.F141.XX-8G	SMA Male R/A	SMA Male R/A	60, 100, 120, 150, 200	8.0	1.50
290290.F141.XX	SMA Female S/T	SMA Female S/T	60, 100, 120, 150, 200	10.0	1.30
290290.F141.XX(H3)	SMA Female S/T	SMA Female S/T	60, 100, 120, 150, 200	18.0	1.40

*Definition of Length: " XX "

Length $\leq 30\text{CM}$, the length cable is referring to exclude two terminal length of connector.

Length $> 30\text{CM}$, the length cable is referring to include two terminal length of connector.

**Definition of Tolerance

Length $\leq 10\text{cm}$: $\pm 0.5\text{cm}$, Length $\leq 30\text{cm}$: $\pm 1.0\text{cm}$, Length $\leq 50\text{cm}$: $\pm 2.0\text{cm}$,

Length $\leq 100\text{cm}$: $\pm 2.5\text{cm}$, Length $> 101\text{cm}$: $\pm 3.0\text{cm}$

***Estimate of Cable Assembly loss

Cable assembly loss = Connector loss + Assembly loss + Cable loss

Connector Loss: $0.08 \times \sqrt{\text{Frequency}} \times 2$ (2 connectors)

Assembly Loss : $0.12 \times 2(\text{sides})$

Cable Loss: per cable attenuation (Max.) * Cable length


NOTES:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

Typical Test Result

PART NUMBER	DESCRIPTION
260260.F141.300B(H3)	N Males To N Male, Flexible 141 Blue/L:300cm, DC-10GHz/Double Rigid Tubing


Tr1 S11 Refl SWR RefLvl: 1 U Res: 100 mU/Div

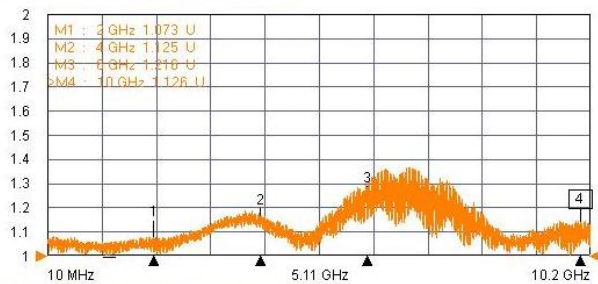


Tr2 S12 Trans LogM RefLvl: 0 dB Res: 1 dB/Div



Tr3 S21 Trans LogM RefLvl: 0 dB Res: 1 dB/Div

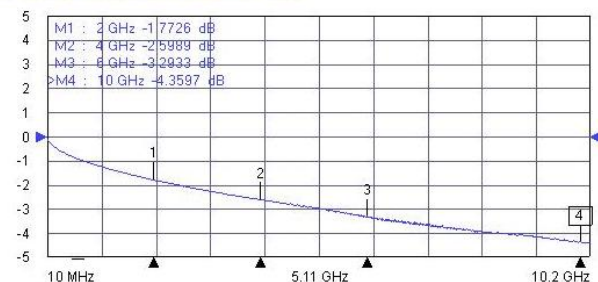


Tr4 S22 Refl SWR RefLvl: 1 U Res: 100 mU/Div

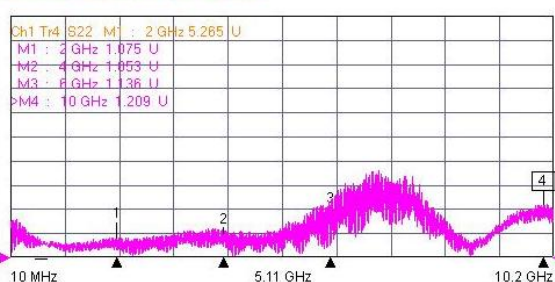


Typical Test Result

PART NUMBER	DESCRIPTION
260280.F141.150B	N Male To SMA Male, Flexible 141 Blue/L:150cm/Double Rigid Tubing


Tr1 S11 Refl SWR RefLvl: 1 U Res: 100 mU/Div

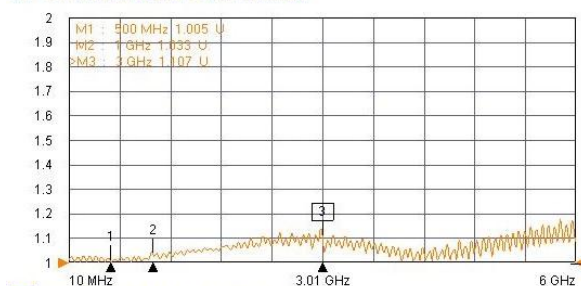


Tr2 S12 Trans LogM RefLvl: 0 dB Res: 2 dB/Div

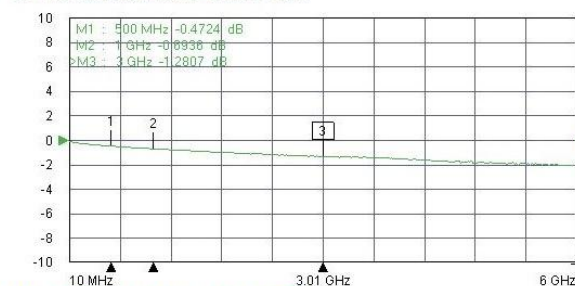

Tr3 S21 Trans LogM RefLvl: 0 dB Res: 2 dB/Div


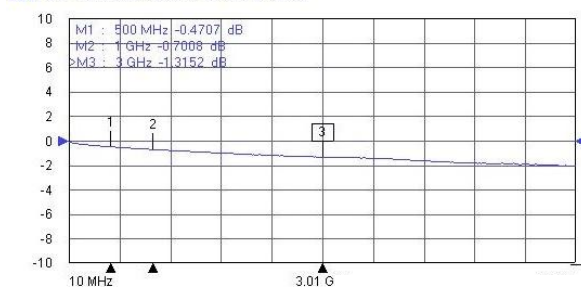


Tr4 S22 Refl SWR RefLvl: 1 U Res: 100 mU/Div

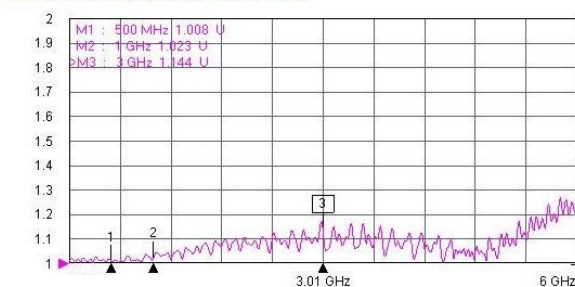

Typical Test Result


PART NUMBER	DESCRIPTION
260280.F141.60A(H3)	N Male To SMA Male/Stainless, Flexible 141 Blue/L:60cm, DC-10GHz/Brass Tubing

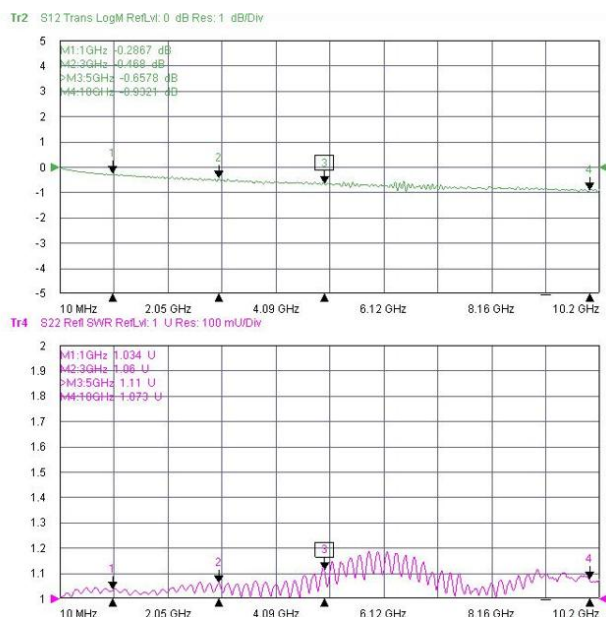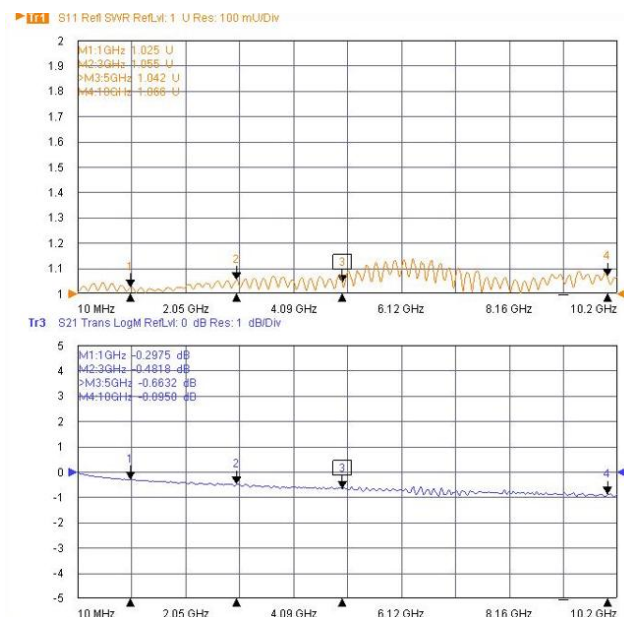


Typical Test Result

PART NUMBER	DESCRIPTION
280280.F141.200C	SMA Male To SMA Male, Flexible 141 Blue/L:200cm/Rigid Glued Tubing


Tr1 S11 Refl SWR RefLvl: 1 U Res: 100 mU/Div

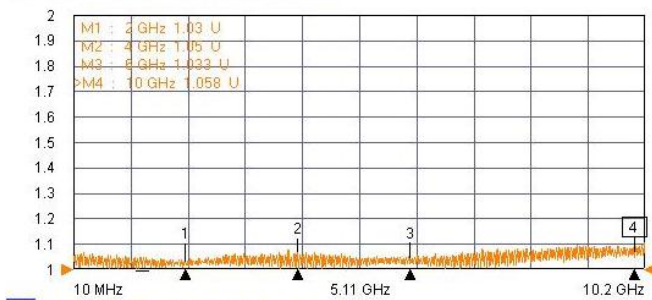


Tr2 S12 Trans LogM RefLvl: 0 dB Res: 1 dB/Div

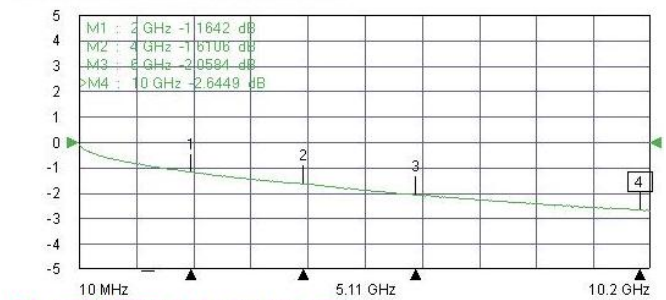

Tr3 S21 Trans LogM RefLvl: 0 dB Res: 1 dB/Div

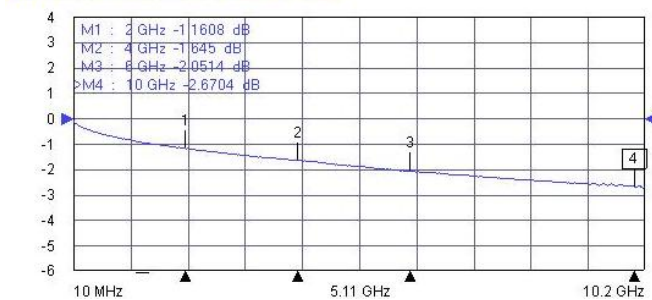


Tr4 S22 Refl SWR RefLvl: 1 U Res: 100 mU/Div

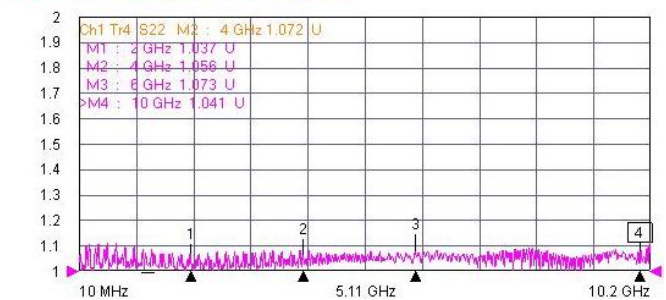


Typical Test Result

PART NUMBER	DESCRIPTION
280280.F141.100A(H3)	SMA Male/Stainless To SMA Male/Stainless, Flexible 141 Blue/L:100cm/ Brass Tubing

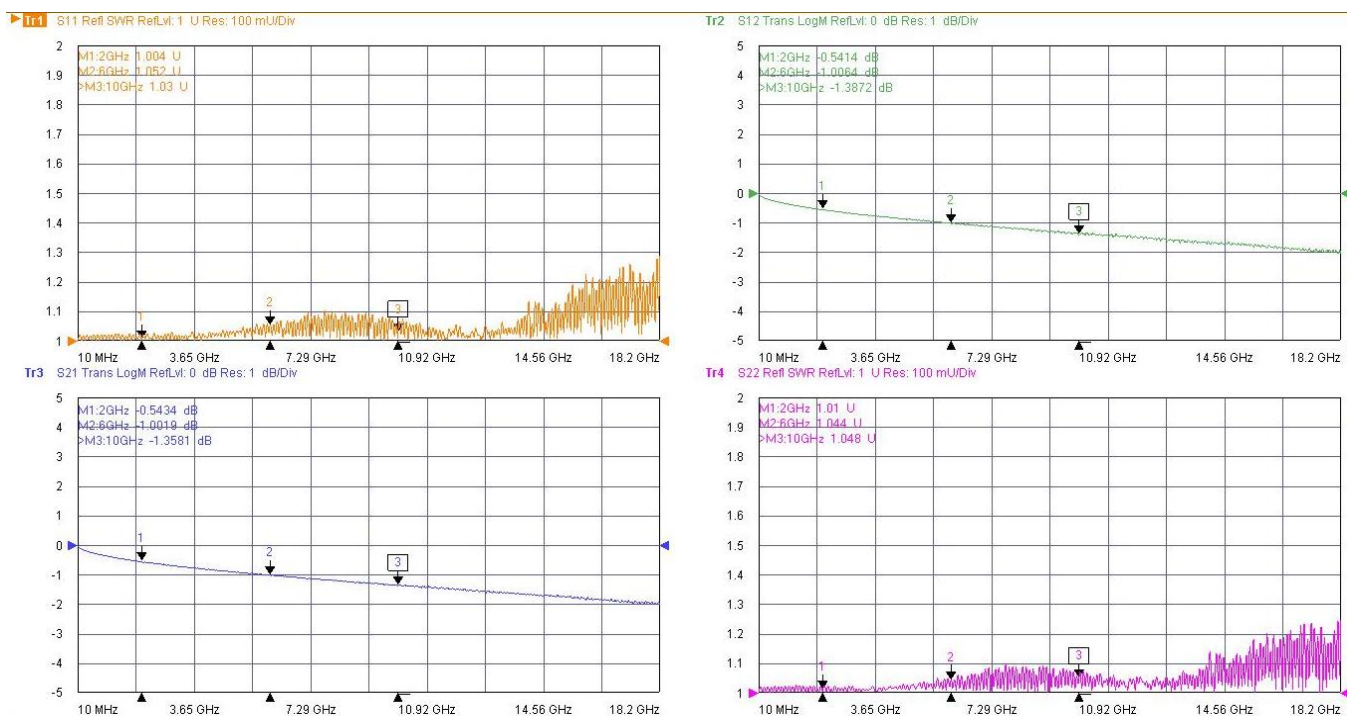


Typical Test Result

PART NUMBER	DESCRIPTION
280281.F141.100A	SMA Male To SMA Male Reverse, Flexible 141 Blue/L:100cm/Brass Tubing

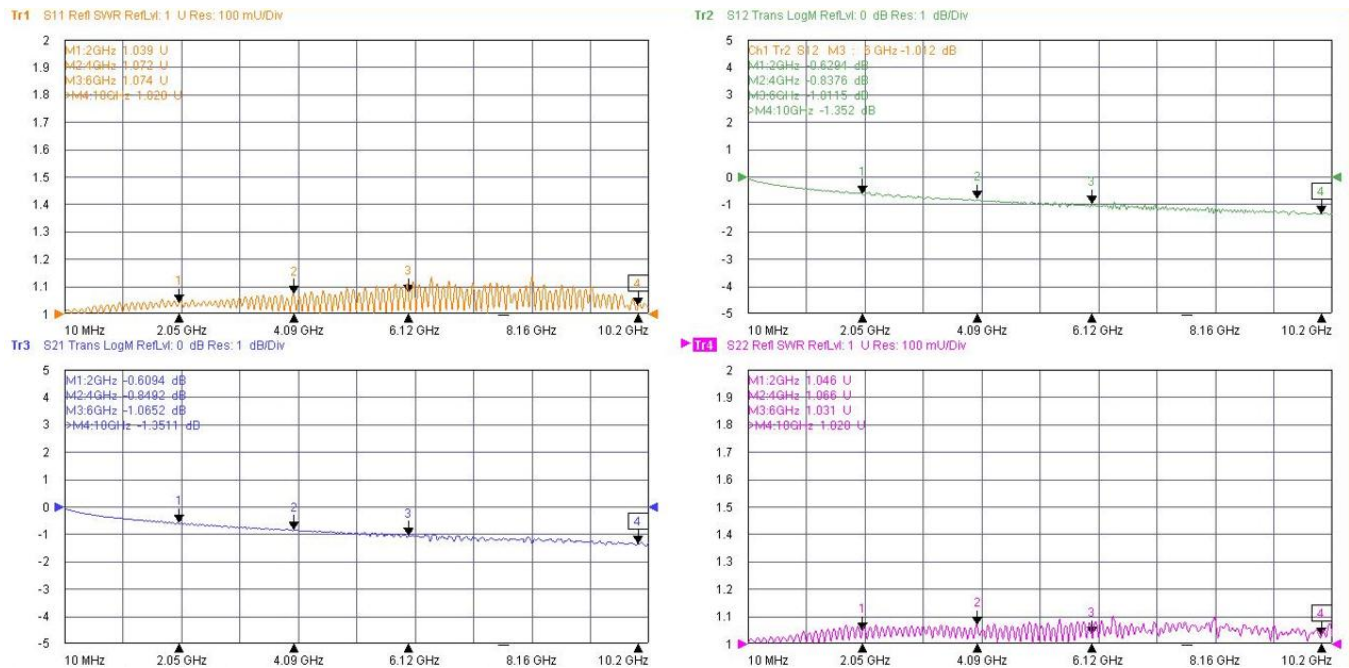

Typical Test Result


PART NUMBER	DESCRIPTION
280282.F141.20C	SMA Male To SMA Male R/A, Flexible 141 Blue/L:20cm/Rigid Glued Tubing

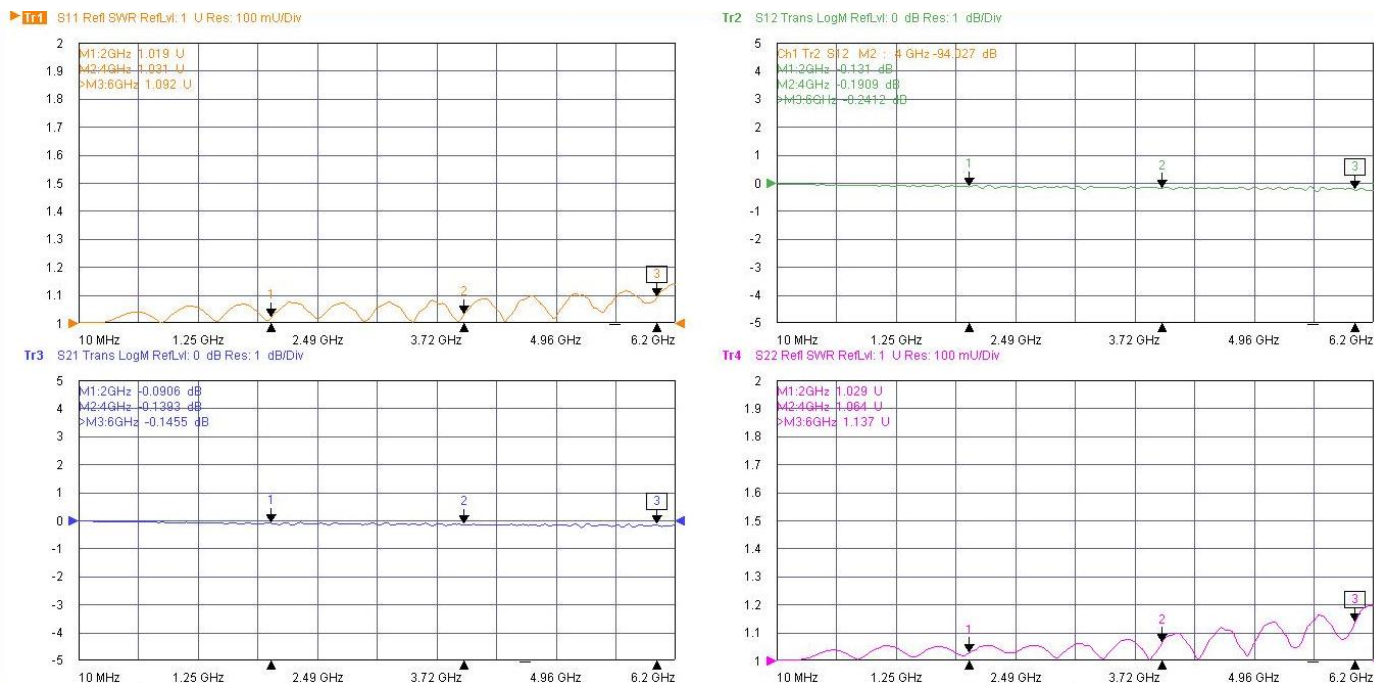


Typical Test Result

PART NUMBER	DESCRIPTION
282282.F141.5A-8G	SMA Male R/A To SMA Male R/A, Flexible 141 Blue/L:5cm/Brass Tubing,DC-8GHz


Tr1 S11 Refl SWR RefLvl: 1 U Res: 100 mUIDiv

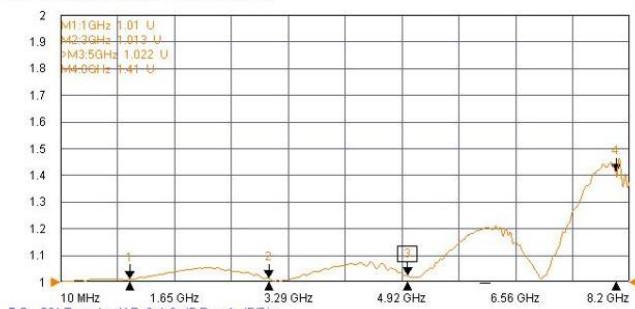


Tr3 S21 Trans LogM RefLvl: 0 dB Res: 1 dB/Div

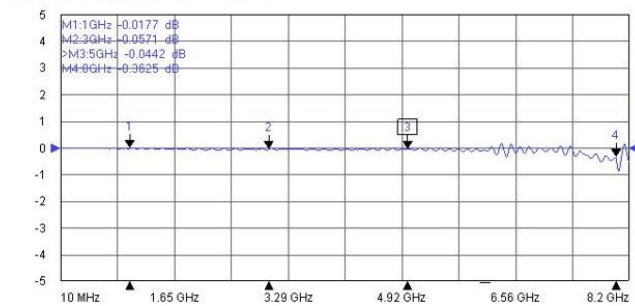

Tr2 S12 Trans LogM RefLvl: 0 dB Res: 1 dB/Div

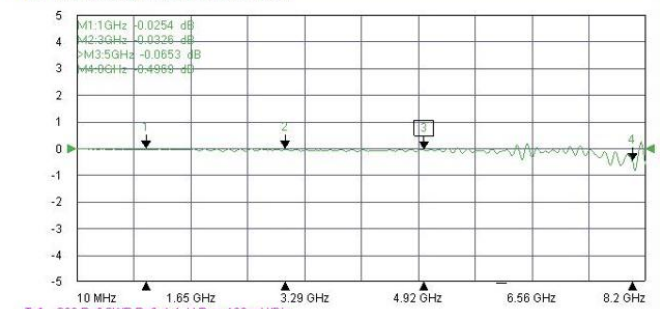

Tr4 S22 Refl SWR RefLvl: 1 U Res: 100 mUIDiv

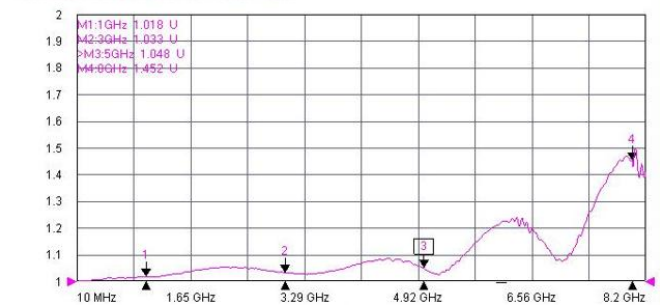

Typical Test Result

PART NUMBER	DESCRIPTION
290290.F141.50A(H3)	SMA Female To SMA Female, Flexible 141/L60cm/Brass Tubing

