

COAXIAL CIRCULATOR

4.0-8.0 GHz
SMA Series

Features

- ✓ Frequency range: 4.0-8.0 GHz
- ✓ Low Insertion Loss
- ✓ High Isolation



Specifications

Connector Type: SMA FEMALE


Direction: Clockwise

Operating Temperature: 0°C ~+60°C

PART NUMBER	FREQUENCY (GHz)	VSWR (MAX.)	INSERTION LOSS (MAX.)	ISOLATION (MIN.)	FORWARD POWER
MVE7164H	4.0-8.0	1.3:1	0.5dB	18dB	50W CW

Tolerance: $\pm 0.5\text{mm}$

Outline Drawing (Unit: mm)

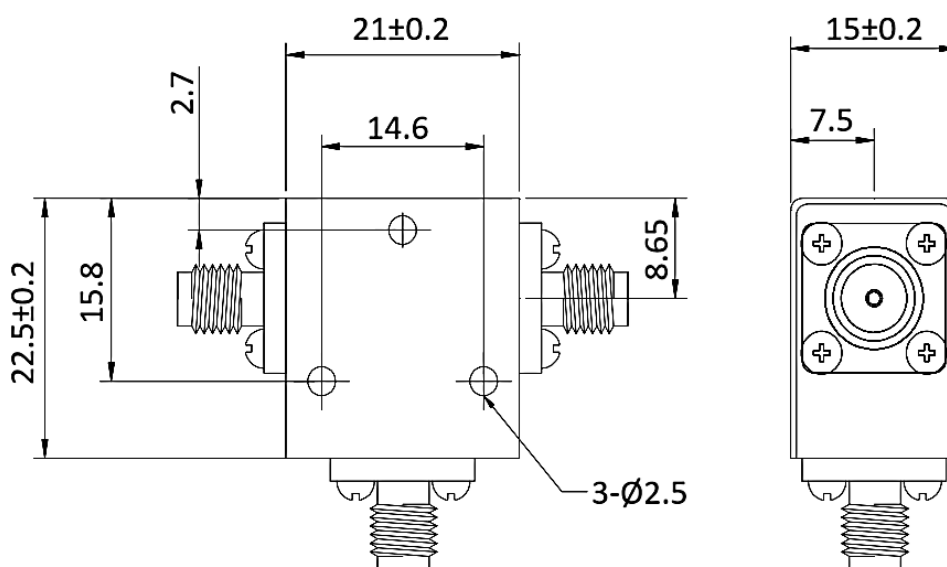

NOTES:

- ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
- CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY



Typical Test Result

