



COAXIAL ADAPTER

SMA-SMA Standard Series

Features

- ✓ Frequency Range: DC to 10 GHz
- ✓ High performance design
- ✓ Low VSWR




Specifications


PART NUMBER	MVE1701C
DESCRIPTION	SMA Male To SMA Male Adapter, DC-10GHz
ELECTRICAL	MATERIALS
FREQUENCY: DC-10GHz IMPEDANCE: 50OHM VSWR: 1.1:1 MAX. DIELECTRIC WITHSTANDING VOLTAGE: 1000Vrms MIN. INTERNAL CONDUCTOR CONTACT RESISTANCE: ≤3mΩ EXTERNAL CONDUCTOR CONTACT RESISTANCE: ≤2mΩ INSULATION RESISTANCE: ≥5000MΩ WORKING VOLTAGE: 335Vrms MAX. TEMPERATURE RANGE: -65°C~+ 165°C DURABILITY: 500 CYCLES	BODY: BRASS, GOLD PLATED CONTACT: BRASS, GOLD PLATED C-RING: STAINLESS O-RING: SILICON INSULATOR: TEFLON

TOLERANCE: X=±0.38 X.X=±0.25 .XX=±0.15

Outline Drawing (Unit: mm)

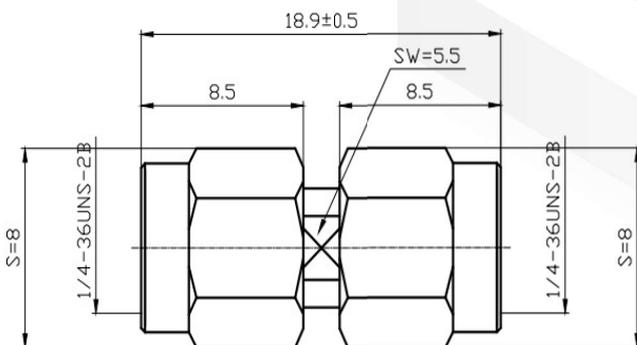

Typical Test Result

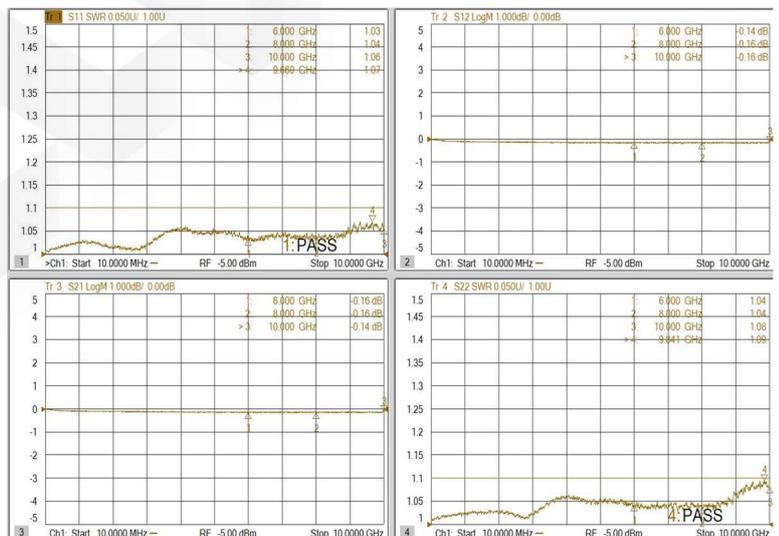

NOTES:
1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

