



COAXIAL ADAPTER

2.92mm-2.92mm Precision Series

Features

- ✓ Frequency up to 40 GHz
- ✓ Low VSWR
- ✓ High Durability




Specifications

PART NUMBER	MVE1193B
DESCRIPTION	2.92mm Female To 2.92mm Female R/A Adapter, 0.01-40GHz / Stainless
ELECTRICAL	FREQUENCY: 10MHz-40GHz IMPEDANCE: 50Ω VSWR: 1.25:1 MAX.
MECHANIAL	TEMPERATURE RANGE: -55°C~+165°C DURABILITY: 500CYCLE MIN.
MATERIALS	BODY: STAINLESS STEEL, PASSIVATED INSULATOR: PEI PIN CONTACT: BERYLLIUM COPPER ALLOY, GOLD-PLATED

Tolerance: ±0.5mm

Outline Drawing (Unit: mm)

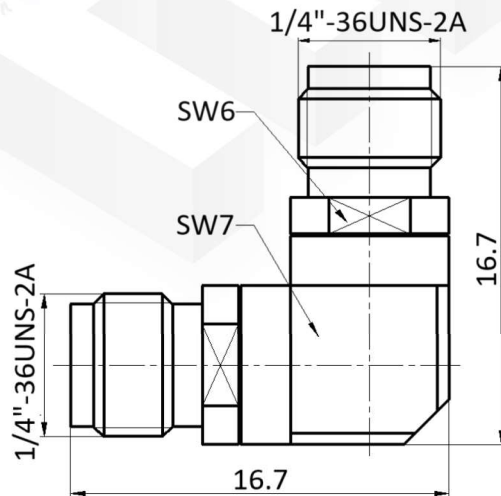


NOTES:
1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY





Typical Test Result

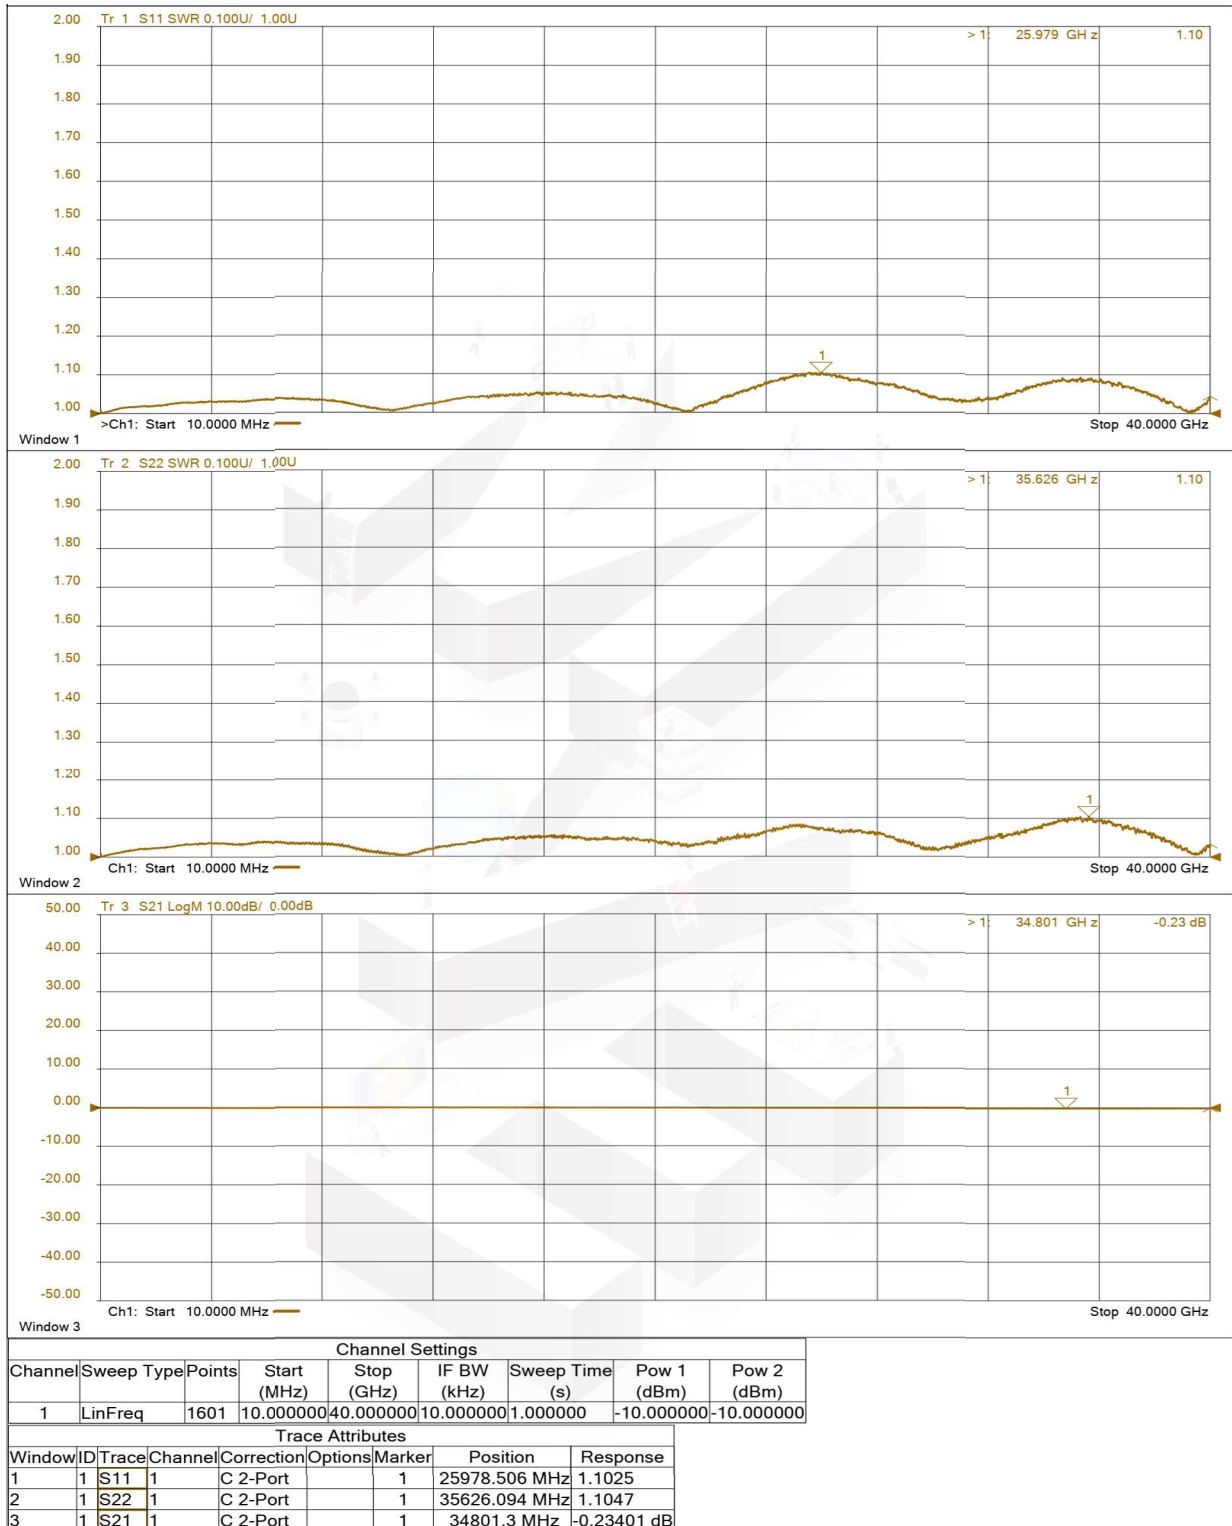

NOTES:
1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

