



COAXIAL ADAPTER

N-SMA Standard Series

Features

- ✓ Frequency up to 6GHz
- ✓ High Durability
- ✓ Low VSWR




Specifications


PART NUMBER	MVE1385B
DESCRIPTION	N Male To SMA Female Adapter, DC-6GHz
ELECTRICAL	MATERIALS
FREQUENCY : DC-6GHz IMPEDANCE: 50ohm WORKING VOLTAGE: 400V DIELECTRIC WITHSTANDING VOLTAGE: 1000V INSULATOR RESISTANCE: 5000MEGOHMS MIN. DURABILITY:>500 CYCLES INSERTION LOSS:0.3dB VSWR:1.2MAX.	BODY: BRASS, NICKEL PLATED CONTACT: PHOSPHOR BRONZE ALLOY, GOLD PLATED INSULATOR: TEFLON

Tolerance: ±2mm

Outline Drawing (Unit: mm)

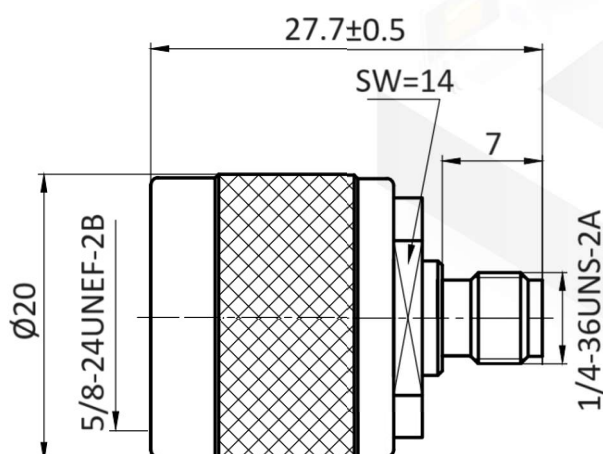

Typical Test Result

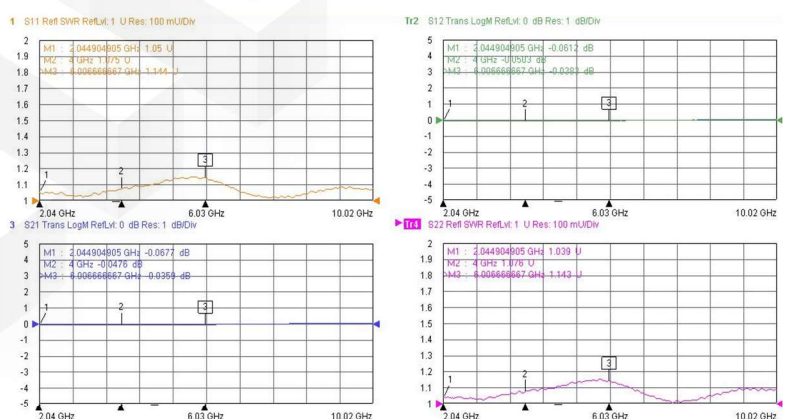

NOTES:
1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

