

COAXIAL ADAPTER

N-SMA

Standard Series

Features

- ✓ High performance design
- ✓ Frequency Range: DC to 6 GHz
- ✓ Low VSWR




Specifications


PART NUMBER	MVE1386
DESCRIPTION	50ohm N Female To SMA Male, 6GHz Adapter
ELECTICAL	MATERIALS
FREQUENCY: DC-6GHz IMPEDANCE: 50OHM VSWR: 1.2:1 MAX. WORKING VOLTAGE:500Vrms MAX. DIELECTRIC WITHSTANDING VOLTAGE:1000Vrms MAX. INSULATOR RESISTANCE:5000 MEGOHMS MIN.	BODY: BRASS, NICKLE PLATED CONTACT: PHOSPHOR BRONZE, GOLD PLATED INSULATOR: PTFE SHELL: BRASS C-RING: Be. Copper GASKET: SILICON

TOLERANCE: X=±0.2 X.X=±0.1 .XX=±0.05

Outline Drawing (Unit: mm)

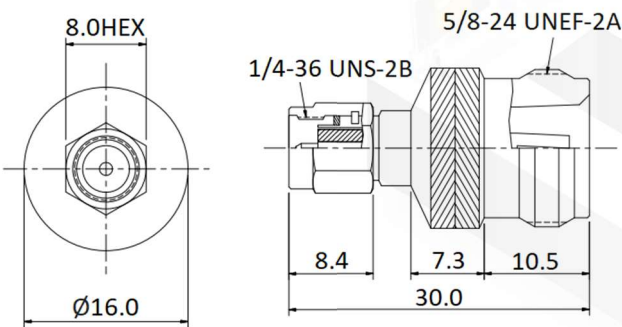

Typical Test Result

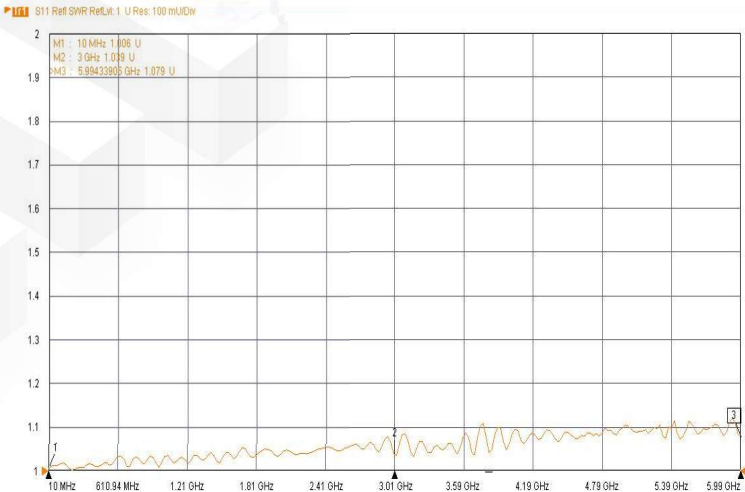

NOTES:

- ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
- CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

