



# COAXIAL ADAPTER

## BNC-N Standard Series

### Features

- ✓ Frequency Range: DC to 4GHz
- ✓ High performance
- ✓ High Durability




### Specifications

<b>PART NUMBER</b>	MVE1390
<b>DESCRIPTION</b>	BNC Female To N Male Adapter, DC-4GHz
ELECTRICAL	
FREQUENCY : DC-4GHz IMPEDANCE: 50Ω WITHSTANDING VOLTAGE: 1000V INSULATION RESISTANCE: ≥5000MΩ DURABILITY: 500 CYCLES MIN. TEMPERATURE RANGE: -55°C~+165°C	
MATERIALS	
BODY: BRASS, NICKEL PLATED PIN CONTACT: PHOSPHOR BRONZE, GOLD PLATED COUPLING NUT: BRASS, NICKEL PLATED INSULATOR: PTFE GASKET: SILICONE RUBBER	

Tolerance: ±0.5mm

### Outline Drawing (Unit: mm)

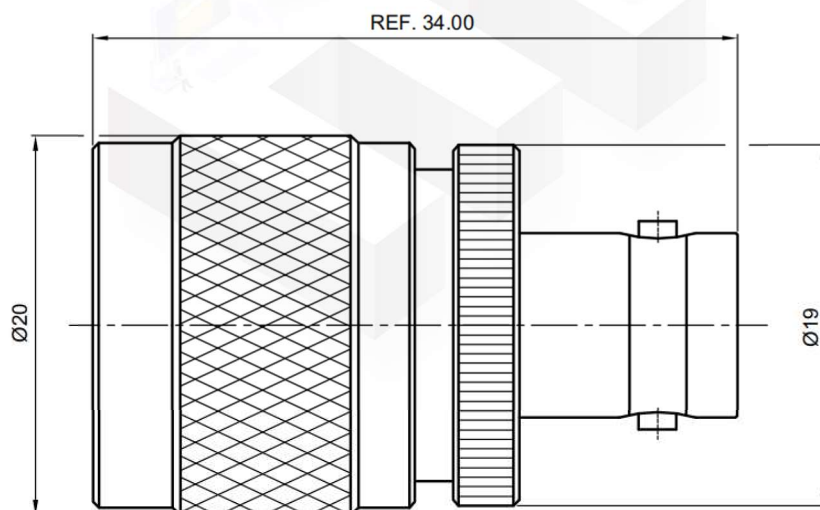

NOTES:  
1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME  
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

