



COAXIAL ADAPTER

MCX-SMA Standard Series

Features

- ✓ Frequency Range: DC to 8 GHz
- ✓ Low VSWR
- ✓ High Durability




Specifications

PART NUMBER	MVE1559
DESCRIPTION	MCX Male To SMA Female, Adapter
ELECTRICAL	MATERIALS
FREQUENCY: DC-8GHz IMPEDANCE: 50OHM VSWR: 1.3 MAX. WORKING VOLTAGE: 500Vrms MAX. DIELECTRIC WITHSTANDING VOLTAGE: 1000Vrms MAX. INSULATOR RESISTANCE: 5000MEGOHMS MIN. TEMPERATURE RANGE: 65°C~+155°C	BODY: BRASS/BE. COPPER, GOLD PLATED CONTACT: BE. COPPER, GOLD PLATED INSULATOR: TEFLON

TOLERANCE: X=±0.2 X.X=±0.1 .XX=±0.05

Outline Drawing (Unit: mm)

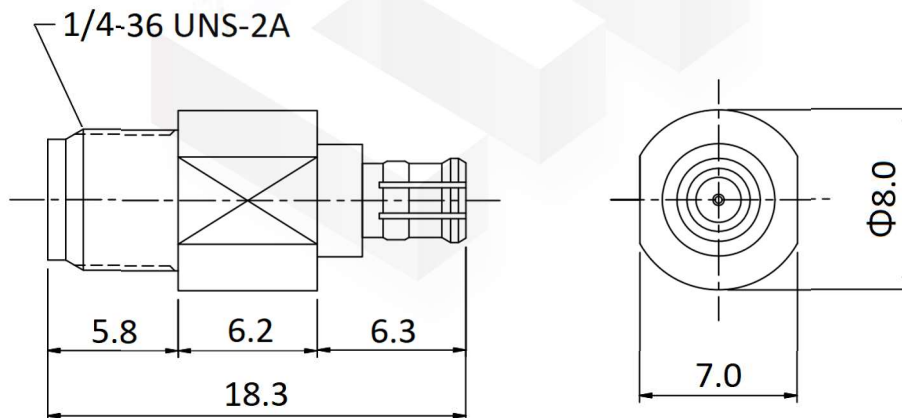

NOTES:
1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

