



COAXIAL ADAPTER

SMA-BNC Standard Series

Features

- ✓ Frequency Range: DC to 4GHz
- ✓ High Durability
- ✓ High performance design




Specifications


PART NUMBER	MVE1579
DESCRIPTION	BNC Female To SMA Male, DC-4GHz Adapter
ELECTRICAL	
FREQUENCY: DC-4GHz IMPEDANCE: 50Ω WITHSTANDING VOLTAGE: 1000V INSULATION RESISTANCE: ≥5000MΩ DURABILITY(MATINGS): 500 CYCLES MIN. TEMPERATURE RANGE: -65°C~+165°C	
MATERIALS	
BODY: BRASS, NICKEL PLATED PIN CONTACT: PHOSPHOR BRONZE, GOLD PLATED COUPLING NUT: BRASS, NICKEL PLATED INSULATOR: PTFE GASKET: SILICONE RUBBER	

Tolerance: ±0.5mm

Outline Drawing (Unit: mm)

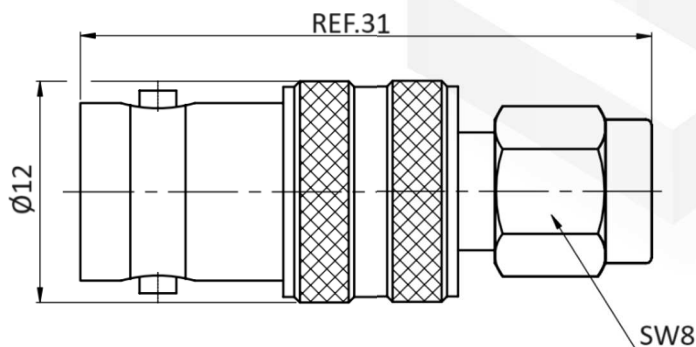

Typical Test Result

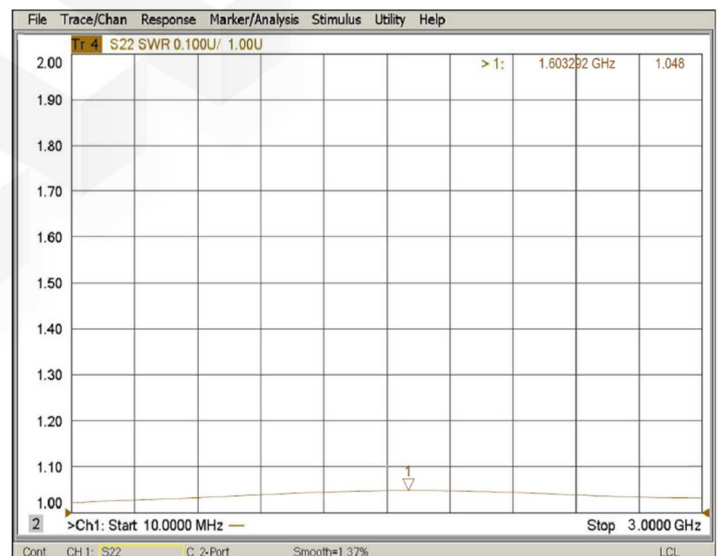

NOTES:
1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

