



COAXIAL ADAPTER

TNC-SMA Standard Series

Features

- ✓ Frequency Range: DC to 6GHz
- ✓ TNC To SMA Interface
- ✓ High Durability




Specifications

PART NUMBER	MVE1582H
DESCRIPTION	TNC Male Reverse To SMA Female Adapter, DC-6GHz
ELECTRICAL	
FREQUENCY: DC-6GHz IMPEDANCE: 50Ω VSWR: 1.30:1 MAX. WITHSTANDING VOLTAGE: 1000V INSULATION RESISTANCE: ≥5000MΩ TEMPERATURE RANGE: -65 to +165°C DURABILITY: 500 CYCLES MIN.	
MATERIALS	
BODY: BRASS, NICKLE PLATED COUPLING NUT: BRASS, NICKEL PLATED PIN CONTACT: PHOSPHOR BRONZE, GOLD PLATED INSULATOR: PTFE GASKET: SILICONE RUBBER	

Tolerance: X=±0.5mm .X=±0.2mm

Outline Drawing (Unit: mm)

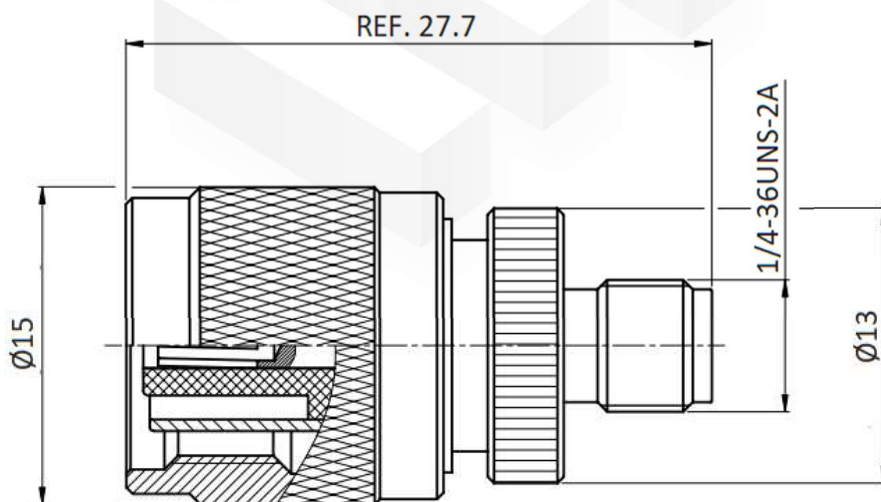

NOTES:
1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

