

COAXIAL ADAPTER

SMA-SMA

Standard Series

Features

- ✓ Frequency Range: DC to 10GHz
- ✓ Low VSWR
- ✓ High performance design




Specifications


PART NUMBER	MVE1702
DESCRIPTION	SMA Male To SMA Female Adapter, DC-10GHz
ELECTRICAL	MATERIALS
FREQUENCY : DC-10GHz IMPEDANCE: 50OHM WORKING VOLTAGE: 335Vrms MAX. DIELECTRIC WITHSTANDING VOLTAGE: 1000Vrms MAX. VSWR: 1.1:1 MAX. INSERTION LOSS: 1dB MAX.	BODY: BRASS, GOLD PLATED CONTACT: BE COPPER, GOLD PLATED INSULATOR: TEFLON

TOLERANCE: X=±0.2 X.X=±0.1 X.XX=±0.05

Outline Drawing (Unit: mm)

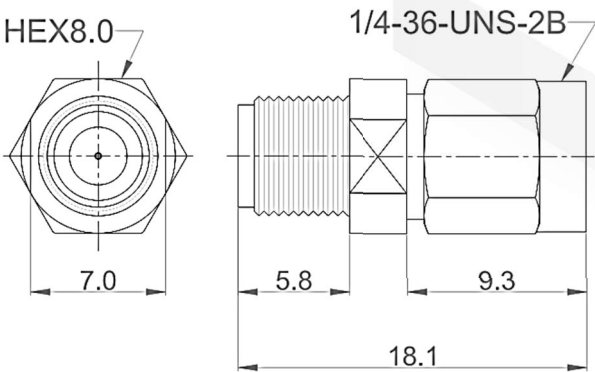

Typical Test Report

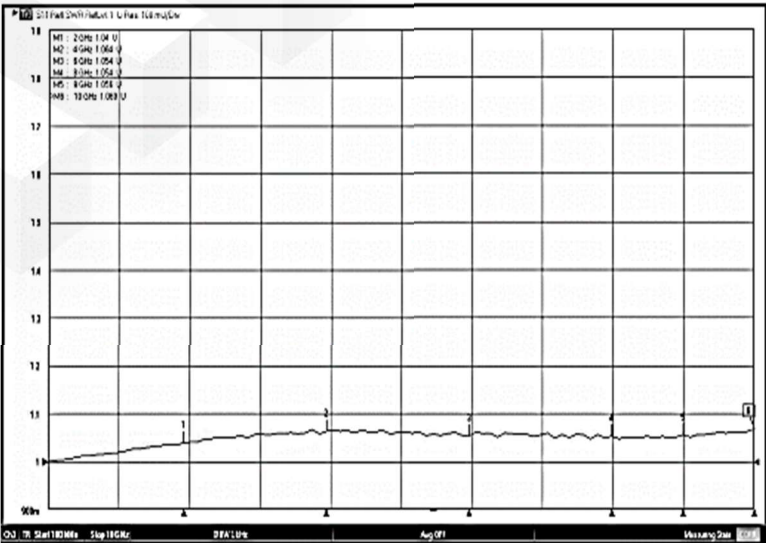

NOTES:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

